

Photometric test report

Family
Streetlight 31 midi



Order number: 5XH313AT08NA
EAN: 4069025511744

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting, Smart Interface up/down

asymmetric distribution (PL32G)

toughened safety glass

LED 3000 K | CRI ≥ 70


ECG SITECO - Smart Interface

Net luminous flux = 22600 lm
Power consumption = 149.5 W
Luminous efficacy = 151.2 lm/W

LP number
59798_1856

serial
documentation
22.08.2025


siteco

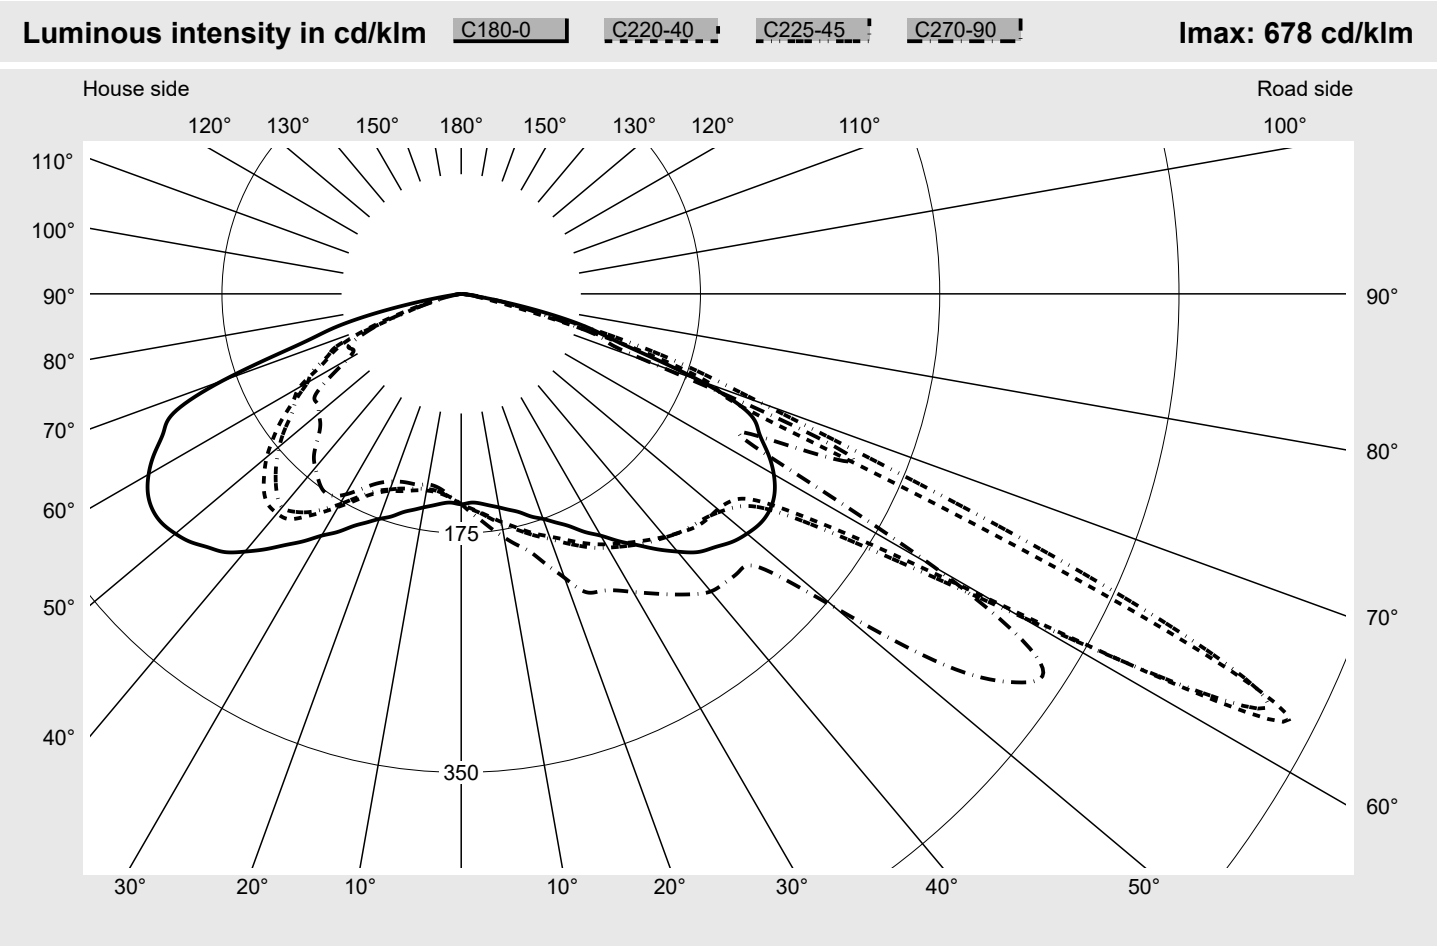

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	623.9
Eta 90° - 180°	0.0%	Imax 80°	57.0
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 midi	Order number: 5XH313AT08NA EAN: 4069025511744	LP number 59798_1856
Envelope curve in cd/klm KMK 62.5° KMK 60° KMK 57.5° KMK 55°		siteco

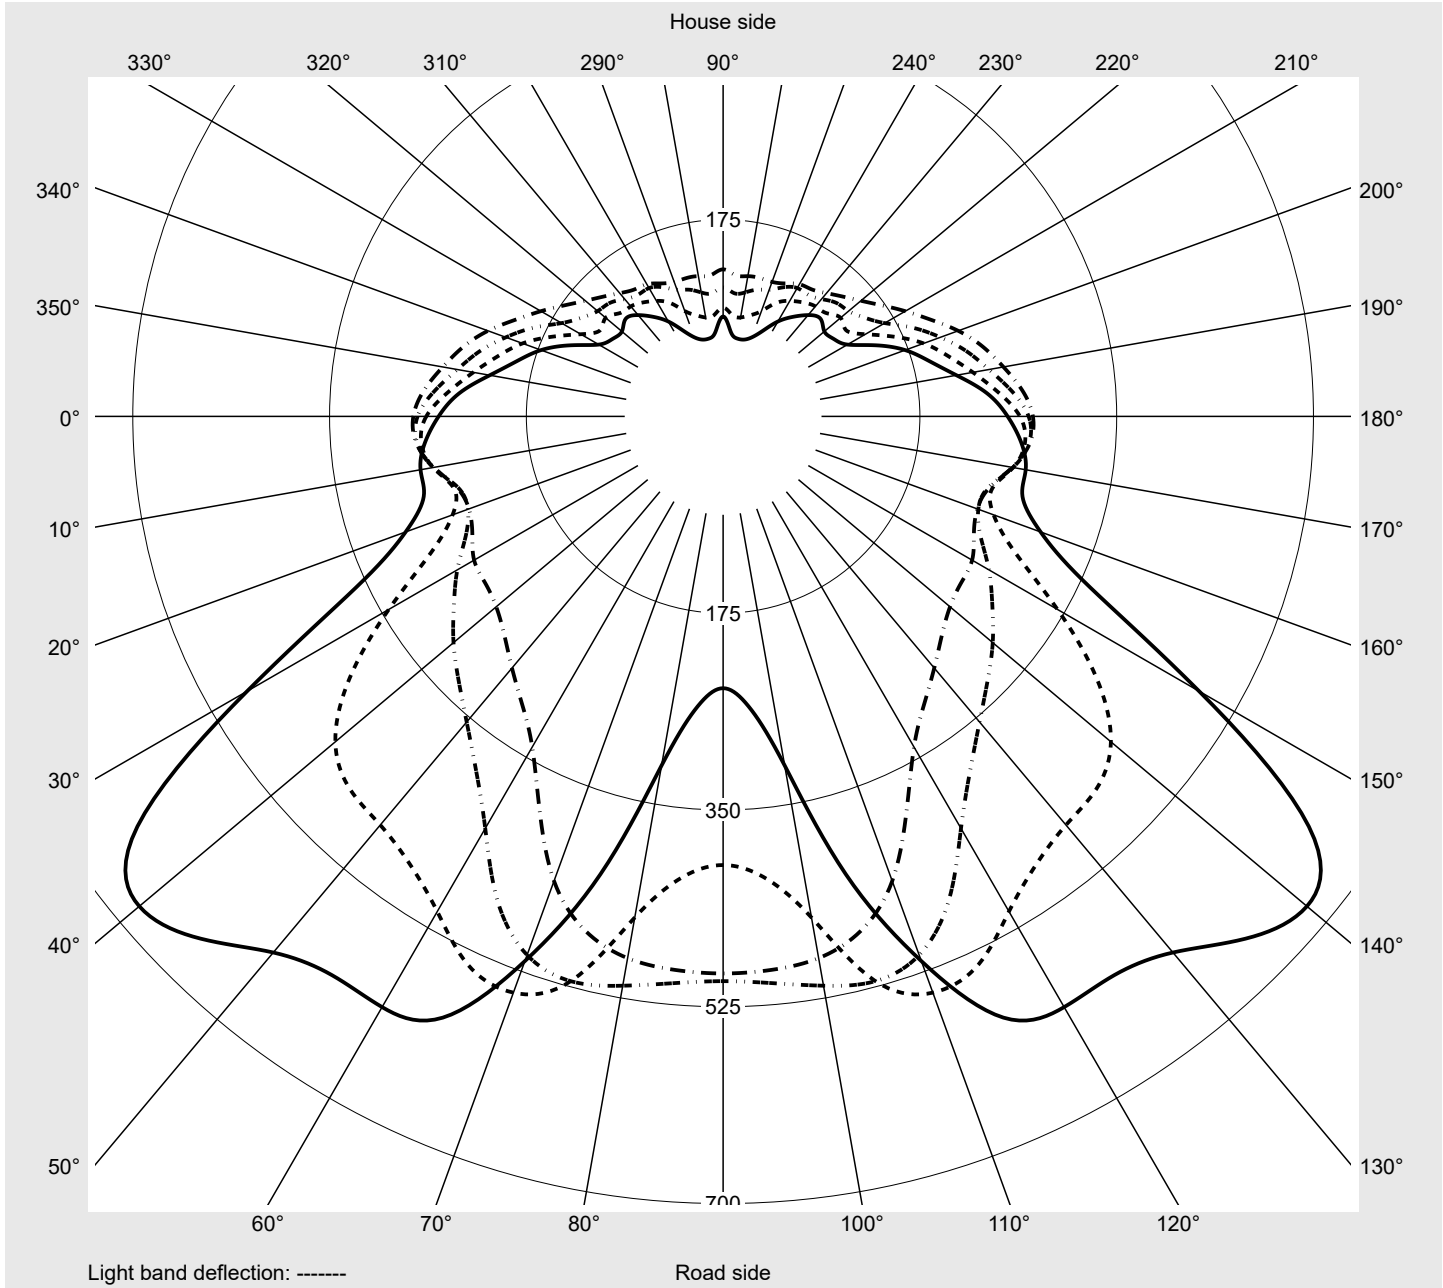

Photometric test report

Family Streetlight 31 midi	Order number: 5XH313AT08NA EAN: 4069025511744	LP number 59798_1856
-------------------------------	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	152.9	153.3	153.8	154.4	154.9	155.4	156.0	156.5	157.0	157.5	157.9	158.3	158.7
5,0°	153.8	154.6	155.4	156.5	157.5	158.3	158.9	159.7	160.5	161.0	161.6	162.2	162.9
7,5°	156.0	157.1	158.0	159.2	160.3	161.4	162.4	163.6	164.7	165.8	166.8	167.8	168.6
10,0°	158.6	159.8	160.7	162.1	163.6	165.0	166.3	167.8	169.4	170.8	172.3	173.6	174.7
12,5°	161.8	162.9	164.3	166.1	167.9	169.6	171.0	172.5	174.0	175.6	177.3	178.9	180.3
15,0°	165.4	166.9	168.3	170.4	172.5	174.3	176.0	177.5	179.2	180.7	182.1	184.2	186.5
17,5°	170.8	172.0	173.2	175.2	177.0	179.0	180.8	182.5	184.2	185.9	187.6	189.5	193.3
20,0°	175.2	177.6	179.4	180.6	182.3	183.8	185.4	187.0	188.9	190.8	193.3	195.6	198.8
22,5°	181.0	183.3	185.4	187.4	188.4	189.3	190.5	192.0	194.2	197.0	200.2	203.5	206.3
25,0°	187.6	190.1	191.6	193.7	195.1	195.1	195.8	197.7	200.2	203.2	206.9	210.2	213.0
27,5°	196.4	198.0	199.0	200.0	201.5	201.5	201.7	203.7	206.2	209.3	212.5	215.7	218.7
30,0°	204.2	206.2	206.7	206.7	207.3	207.7	207.4	209.4	211.5	214.4	217.0	219.4	222.1
32,5°	214.5	215.1	214.9	213.5	212.7	212.7	212.5	214.6	216.5	219.1	221.3	223.8	226.6
35,0°	224.3	224.9	223.5	220.7	217.8	217.6	217.3	220.0	221.5	223.9	226.4	229.1	232.2
37,5°	235.5	234.4	231.5	226.7	222.7	222.0	221.6	224.9	226.7	228.3	230.7	233.9	237.1
40,0°	246.1	244.1	238.9	231.2	227.0	225.6	225.6	229.6	231.8	232.5	234.7	237.4	240.3
42,5°	256.1	251.5	243.7	234.8	230.4	228.4	229.6	234.7	236.8	236.6	237.3	239.0	242.2
45,0°	262.1	258.4	248.9	238.5	233.4	230.6	232.6	238.8	241.5	239.6	239.3	241.4	245.8
47,5°	268.6	264.5	253.2	241.5	235.7	233.5	235.8	240.9	243.9	242.5	242.8	246.1	252.5
50,0°	272.9	269.4	256.7	243.7	237.1	236.9	240.1	244.1	245.1	247.7	250.1	255.0	265.8
52,5°	275.7	272.4	259.2	245.1	239.2	241.2	245.9	248.1	248.9	255.6	263.8	274.7	290.4
55,0°	275.5	273.8	261.2	245.1	240.6	246.1	255.7	258.3	263.4	275.1	292.1	311.9	339.5
57,5°	271.7	273.1	261.7	244.1	241.5	252.6	273.0	292.3	313.0	332.6	354.8	383.3	423.1
60,0°	264.0	269.5	261.9	247.8	256.0	286.6	343.4	405.3	450.2	469.1	474.4	485.9	508.4
62,5°	253.0	266.1	273.3	275.7	300.5	360.4	488.8	635.9	677.8	656.9	622.4	606.6	606.6
65,0°	240.3	274.2	286.5	273.7	264.1	275.7	311.3	384.1	511.5	564.9	556.9	590.7	600.5
67,5°	227.7	249.1	236.1	196.9	168.4	167.8	182.1	207.7	249.4	360.6	503.8	535.0	349.3
70,0°	185.7	185.4	184.1	169.0	150.8	152.0	157.7	172.3	195.9	234.0	284.0	366.9	498.5
72,5°	126.9	155.2	171.0	150.9	111.5	93.7	90.0	103.8	134.0	166.6	192.6	201.1	236.6
75,0°	96.9	117.8	119.7	83.1	44.1	31.7	30.5	39.5	61.7	98.4	139.1	154.4	150.9
77,5°	60.5	54.0	41.1	25.1	13.3	11.4	11.3	14.3	24.0	44.4	79.4	107.8	98.4
80,0°	22.7	9.2	5.9	6.4	6.7	6.7	6.6	7.4	10.8	16.5	36.0	55.9	57.0
82,5°	4.1	2.8	3.0	3.2	3.4	3.5	3.5	3.8	4.8	7.4	13.0	24.0	27.7
85,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	2.0	2.7	5.0	6.9
87,5°	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi		Order number: 5XH313AT08NA EAN: 4069025511744										LP number 59798_1856	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	159.1	159.4	159.7	159.8	159.9	160.0	152.4	151.8	151.6	151.3	150.9	150.6	150.4
5,0°	163.7	164.5	165.1	165.6	166.1	166.3	152.8	151.7	150.9	150.3	149.5	148.7	148.0
7,5°	169.4	170.2	171.2	172.3	173.2	173.6	154.4	152.8	151.7	150.4	149.3	148.1	147.1
10,0°	175.5	176.3	177.2	178.7	180.2	180.9	156.5	154.6	153.1	151.7	150.1	148.7	147.4
12,5°	181.6	182.5	183.3	184.9	187.0	188.0	159.7	157.3	155.6	153.7	152.0	150.4	148.5
15,0°	188.7	190.7	191.4	192.4	194.5	195.4	163.4	160.8	158.9	156.9	154.7	152.7	150.9
17,5°	198.0	202.0	204.3	204.2	206.1	207.7	168.2	165.4	162.6	160.0	157.6	155.4	153.3
20,0°	206.1	212.8	217.8	217.6	218.8	221.0	172.1	169.3	166.3	163.1	160.2	157.5	155.2
22,5°	211.5	220.9	227.4	228.6	229.6	235.8	177.3	174.5	171.9	168.2	164.7	161.6	159.2
25,0°	216.0	224.8	231.2	232.8	233.2	240.0	184.4	180.8	178.1	174.8	170.8	167.5	165.0
27,5°	220.8	226.8	232.8	234.6	234.6	244.5	192.9	189.3	185.7	183.1	179.7	176.3	173.6
30,0°	224.8	229.3	236.4	238.7	238.5	251.8	201.8	198.4	194.5	190.6	188.8	185.4	182.4
32,5°	229.5	233.4	241.7	245.6	245.0	259.8	211.7	208.7	205.0	201.0	197.7	196.5	192.8
35,0°	234.9	238.7	246.3	252.1	252.4	268.4	222.9	220.0	216.2	212.5	208.5	205.4	204.0
37,5°	240.1	243.6	251.3	261.6	263.1	277.0	234.2	231.2	227.2	223.4	219.2	215.1	210.2
40,0°	243.8	247.9	256.6	273.9	278.8	284.1	245.3	242.2	237.9	233.5	228.7	223.0	216.7
42,5°	246.4	252.9	262.7	285.1	288.5	286.1	255.1	251.8	247.3	241.9	235.3	227.8	219.2
45,0°	251.6	260.7	270.1	282.6	289.1	287.3	261.5	259.0	254.5	247.6	239.1	229.2	216.9
47,5°	261.0	273.6	281.2	289.3	296.3	296.3	266.6	262.3	257.3	249.7	238.9	225.6	210.4
50,0°	279.0	298.4	311.8	330.3	349.0	357.1	270.0	263.8	255.6	246.5	233.4	217.1	200.4
52,5°	315.1	351.1	385.6	420.3	441.3	446.2	270.7	260.9	250.0	237.0	221.3	205.0	187.3
55,0°	386.3	439.7	473.6	489.2	494.1	495.4	267.0	253.2	239.2	222.5	203.6	187.1	172.2
57,5°	474.9	509.7	520.2	514.1	506.0	502.2	257.7	240.1	224.0	205.6	186.4	165.9	153.3
60,0°	537.7	545.3	519.2	452.5	411.2	399.0	245.7	225.6	207.2	189.8	167.7	146.1	133.5
62,5°	590.0	515.5	421.5	315.3	258.8	241.7	235.6	210.7	189.9	172.3	149.6	127.7	120.1
65,0°	483.5	302.1	187.1	194.0	243.5	258.9	209.5	187.8	172.2	155.2	131.6	112.6	104.5
67,5°	189.2	219.9	403.6	398.0	335.1	304.9	192.4	159.6	147.1	135.6	113.1	96.5	91.2
70,0°	623.9	488.5	293.6	190.4	158.1	150.3	173.4	146.1	127.2	114.7	96.8	80.7	75.9
72,5°	266.8	208.4	157.0	131.3	114.1	109.4	118.5	122.0	114.7	96.9	76.6	64.1	54.6
75,0°	143.3	125.1	104.9	89.5	77.5	73.1	62.5	68.5	86.0	79.6	61.7	45.1	32.8
77,5°	87.4	73.2	61.5	52.2	46.1	43.5	37.1	27.9	43.3	49.7	37.5	21.9	11.8
80,0°	48.8	40.2	34.1	29.5	25.5	23.9	17.2	9.9	14.2	20.5	16.7	6.9	6.2
82,5°	23.2	19.1	15.7	13.5	11.6	10.9	3.9	3.1	3.7	4.7	4.1	3.1	3.1
85,0°	7.4	6.0	4.9	4.0	3.5	3.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3
87,5°	0.7	0.7	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi		Order number: 5XH313AT08NA EAN: 4069025511744										LP number 59798_1856	
Table of values for luminous intensities										Maximum luminous intensity		sITeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	0.2	0.2
2,5°	150.1	149.8	149.7	149.6	149.4	149.3	149.3	149.3	149.3	149.4	149.4	1.8	2.1
5,0°	147.4	146.7	146.1	145.7	145.4	145.0	144.8	144.8	144.8	144.9	144.9	3.7	5.8
7,5°	146.1	145.0	144.3	143.6	143.0	142.5	142.1	142.1	142.1	142.2	142.1	5.6	11.3
10,0°	146.1	145.0	143.9	143.2	142.4	141.8	141.3	141.2	141.3	141.4	141.5	7.5	18.9
12,5°	147.1	145.9	144.8	143.9	143.2	142.7	142.5	142.6	142.8	142.9	143.0	9.6	28.5
15,0°	149.1	147.5	146.3	145.0	144.1	143.4	142.9	142.9	143.0	143.3	143.4	11.7	40.2
17,5°	151.3	149.3	147.8	147.0	146.1	145.1	144.5	144.0	143.9	143.9	144.2	14.0	54.2
20,0°	153.3	152.2	151.1	150.0	149.0	148.1	147.2	146.4	145.9	145.8	146.1	16.4	70.7
22,5°	157.3	155.7	154.9	154.3	153.1	152.0	150.8	149.8	149.0	148.7	149.1	19.0	89.6
25,0°	162.9	161.3	160.4	159.5	158.9	157.6	156.3	155.0	154.1	153.6	154.2	21.6	111.3
27,5°	171.1	168.6	168.0	167.0	166.0	165.1	163.7	162.7	161.7	161.1	161.6	24.4	135.7
30,0°	179.9	177.7	176.3	175.3	174.1	172.9	171.9	170.8	169.7	169.1	169.5	27.4	163.1
32,5°	189.5	186.7	185.2	183.1	181.4	180.1	179.0	177.4	176.0	175.1	175.0	30.5	193.6
35,0°	198.9	194.9	192.0	189.5	186.2	183.6	181.9	179.0	176.9	175.6	175.8	33.6	227.2
37,5°	207.6	200.8	196.1	191.4	185.8	181.2	178.5	175.5	173.1	171.7	171.5	36.5	263.8
40,0°	209.5	203.8	195.1	187.8	180.7	175.2	171.9	169.1	166.9	165.8	166.0	39.3	303.0
42,5°	209.0	199.4	190.8	181.1	173.4	167.7	164.3	161.7	159.7	159.1	159.3	41.7	344.7
45,0°	204.0	191.9	183.0	172.6	165.1	159.6	156.3	152.5	149.3	147.7	147.8	43.7	388.4
47,5°	195.4	183.3	173.3	165.6	156.8	149.0	143.9	140.5	138.4	138.2	139.8	45.6	434.0
50,0°	185.6	173.6	164.0	154.2	144.2	138.5	137.0	136.0	134.9	134.8	136.0	48.2	482.2
52,5°	173.2	162.6	152.2	141.9	140.0	135.1	132.1	130.8	129.2	128.9	132.2	52.1	534.3
55,0°	160.0	150.6	143.1	137.8	135.7	130.5	127.3	127.3	126.6	126.0	130.8	56.4	590.7
57,5°	145.7	142.6	136.2	132.0	131.8	126.7	119.8	116.6	111.9	110.1	114.6	60.7	651.4
60,0°	136.4	129.9	127.7	123.8	118.6	111.3	99.7	93.1	89.3	90.6	96.7	65.1	716.5
62,5°	117.5	122.6	117.6	108.0	97.4	84.2	74.8	70.7	70.4	75.9	88.8	70.5	787.0
65,0°	105.1	107.7	103.0	86.6	70.4	62.2	58.9	58.0	57.6	65.6	91.0	59.1	846.2
67,5°	91.4	95.9	78.9	58.2	51.3	50.5	50.5	45.2	40.7	48.6	78.6	48.7	894.8
70,0°	68.4	57.8	51.5	42.6	42.2	44.3	38.5	25.7	21.0	30.1	60.3	43.2	938.0
72,5°	43.3	34.9	32.5	34.1	37.1	35.6	20.9	16.3	17.0	20.4	34.9	27.8	965.8
75,0°	25.0	22.6	25.6	29.5	28.0	20.4	14.3	12.0	11.5	12.4	17.2	17.6	983.3
77,5°	11.6	14.3	17.1	18.0	15.2	11.7	10.3	8.3	6.8	6.6	10.8	9.5	992.9
80,0°	6.5	7.0	8.1	8.5	8.0	7.4	6.3	4.9	3.3	2.0	1.6	4.4	997.3
82,5°	3.3	3.6	4.1	4.1	4.3	4.1	3.3	2.5	1.9	1.2	1.0	1.9	999.2
85,0°	1.4	1.5	1.6	1.6	1.7	1.7	1.5	1.3	1.0	0.9	0.9	0.6	999.8
87,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XH313AT08NA EAN: 4069025511744	LP number 59798_1856
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	22600	149.5	163.6	156.6
95	239	252	21492	140.1	152.8	146.4
90	224	249	20353	130.8	142.5	136.6
85	209	247	19181	121.6	132.5	127.0
80	195	244	18061	113.1	123.1	118.1
75	181	242	16914	104.7	113.9	109.3
70	168	239	15834	97.0	105.4	101.2
65	154	236	14650	88.7	96.4	92.6
60	141	232	13531	81.1	88.1	84.6
55	128	229	12390	73.6	79.8	76.7
50	116	225	11321	66.6	72.3	69.4
45	103	221	10142	59.2	64.2	61.7
40	91	216	9035	52.2	56.7	54.4
35	79	211	7914	45.4	49.3	47.3
30	67	205	6777	38.5	41.7	40.1
25	55	198	5621	31.8	34.4	33.1
20	44	190	4550	25.8	27.8	26.8
15	32	178	3368	19.4	20.8	20.1
10	21	163	2271	13.4	14.4	13.9
10	20	161	2171	12.9	13.8	13.4

Dimming levels table		environmental temperature: 5°C					
----------------------	--	--------------------------------	--	--	--	--	--

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	23270	151.3	165.6	158.4
95	239	252	22096	141.9	154.7	148.3
90	225	250	20977	133.1	145.0	139.0
85	210	247	19749	123.8	134.8	129.3
80	196	245	18580	115.3	125.4	120.4
75	183	242	17477	107.4	116.7	112.0
70	169	239	16267	98.9	107.5	103.2
65	156	236	15129	91.2	99.0	95.1
60	143	233	13972	83.5	90.6	87.0
55	130	229	12800	75.8	82.3	79.0
50	117	226	11609	68.2	73.9	71.1
45	105	222	10496	61.2	66.3	63.8
40	92	217	9272	53.6	58.1	55.8
35	80	212	8126	46.6	50.6	48.6
30	68	206	6967	39.7	43.0	41.4
25	56	199	5792	32.9	35.6	34.2
20	44	190	4606	26.2	28.3	27.2
15	33	179	3508	20.2	21.7	21.0
10	21	163	2296	13.6	14.6	14.1
9	20	161	2195	13.1	14.0	13.6

Photometric test report

Family Streetlight 31 midi	Order number: 5XH313AT08NA EAN: 4069025511744	LP number 59798_1856
Dimming levels table		environmental temperature: 15°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	22970	150.4	164.6	157.5
95	239	252	21826	141.0	153.7	147.4
90	224	249	20654	131.6	143.4	137.5
85	210	247	19533	123.0	133.9	128.4
80	196	245	18387	114.5	124.6	119.6
75	182	242	17217	106.0	115.3	110.6
70	169	239	16115	98.2	106.7	102.4
65	155	236	14908	89.9	97.7	93.8
60	142	233	13768	82.3	89.3	85.8
55	129	229	12610	74.7	81.0	77.8
50	117	226	11524	67.7	73.4	70.6
45	104	221	10332	60.1	65.2	62.6
40	92	217	9212	53.2	57.7	55.4
35	80	212	8077	46.2	50.2	48.2
30	68	206	6928	39.4	42.6	41.0
25	56	199	5763	32.7	35.3	34.0
20	44	190	4584	26.0	28.0	27.0
15	33	179	3492	20.0	21.5	20.8
10	21	163	2286	13.5	14.5	14.0
10	20	161	2185	13.0	13.9	13.4

Photometric test report

Family Streetlight 31 midi	Order number: 5XH313AT08NA EAN: 4069025511744	LP number 59798_1856
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	22600.0	149.5
5.0	23270.0	151.3
15.0	22970.0	150.4