

Photometric test report

Family Streetlight 31 midi

Order number: 5XH314AA08MA
EAN: 4069025511805

LP number
59800_3108



Version	post-top or side-entry mounting
Optic	asymmetric distribution (PL32)
Cover	toughened safety glass
Lamps	LED 4000 K CRI ≥ 70
Controlgear	ECG SITECO
Rated values	Net luminous flux = 20490 lm Power consumption = 145.3 W Luminous efficacy = 141 lm/W

serial
documentation
22.08.2025

siteco

Luminous intensity in cd/klm


C180-0

C245-65

C250-70

C270-90

Imax: 1590 cd/klm

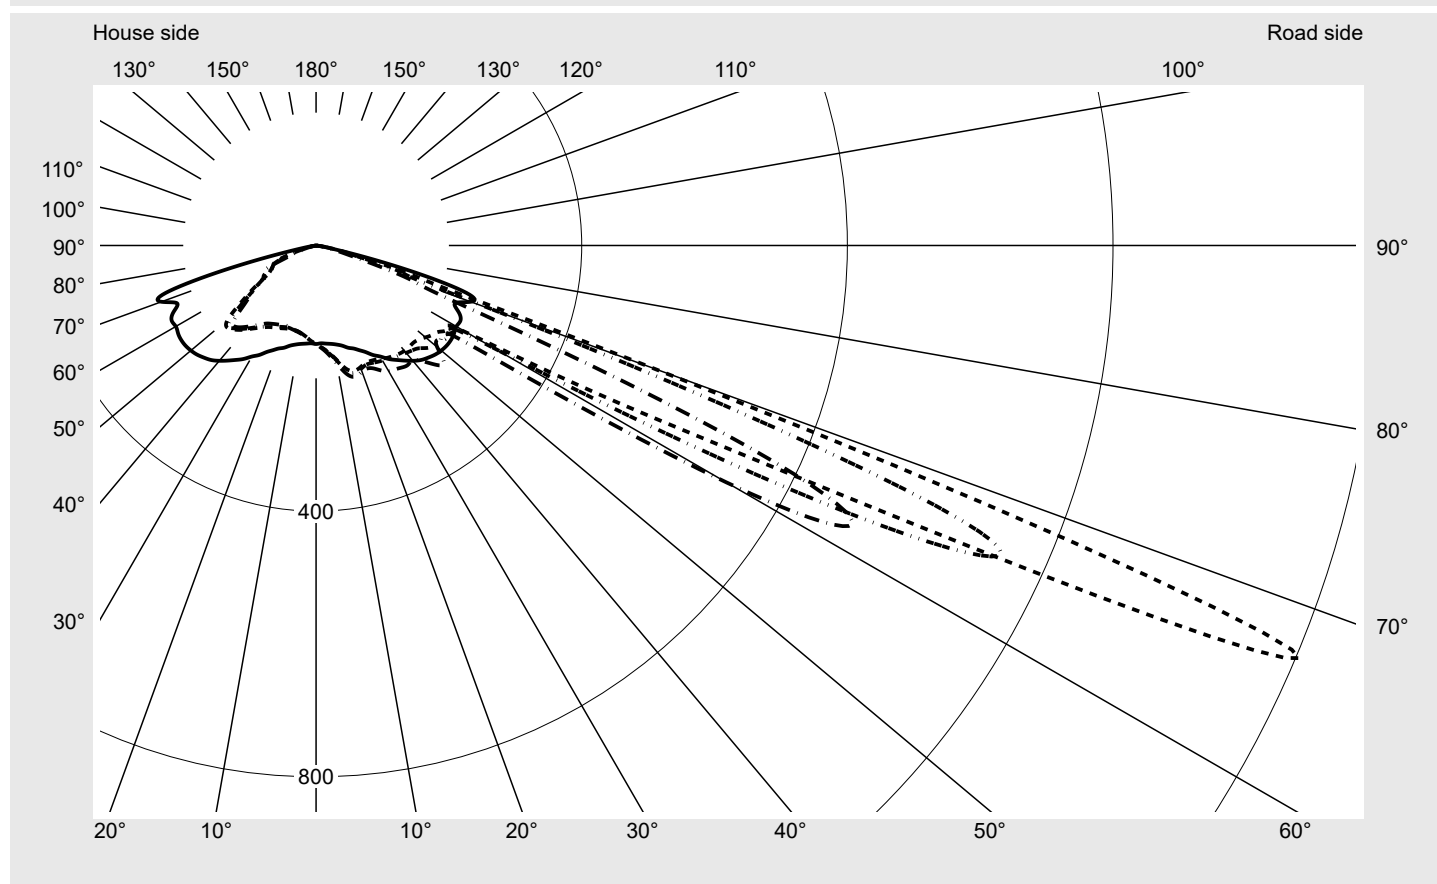

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	732.5
Imax 80°	42.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 31 midi

Order number: **5XH314AA08MA**
EAN: **4069025511805**

LP number
59800_3108

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

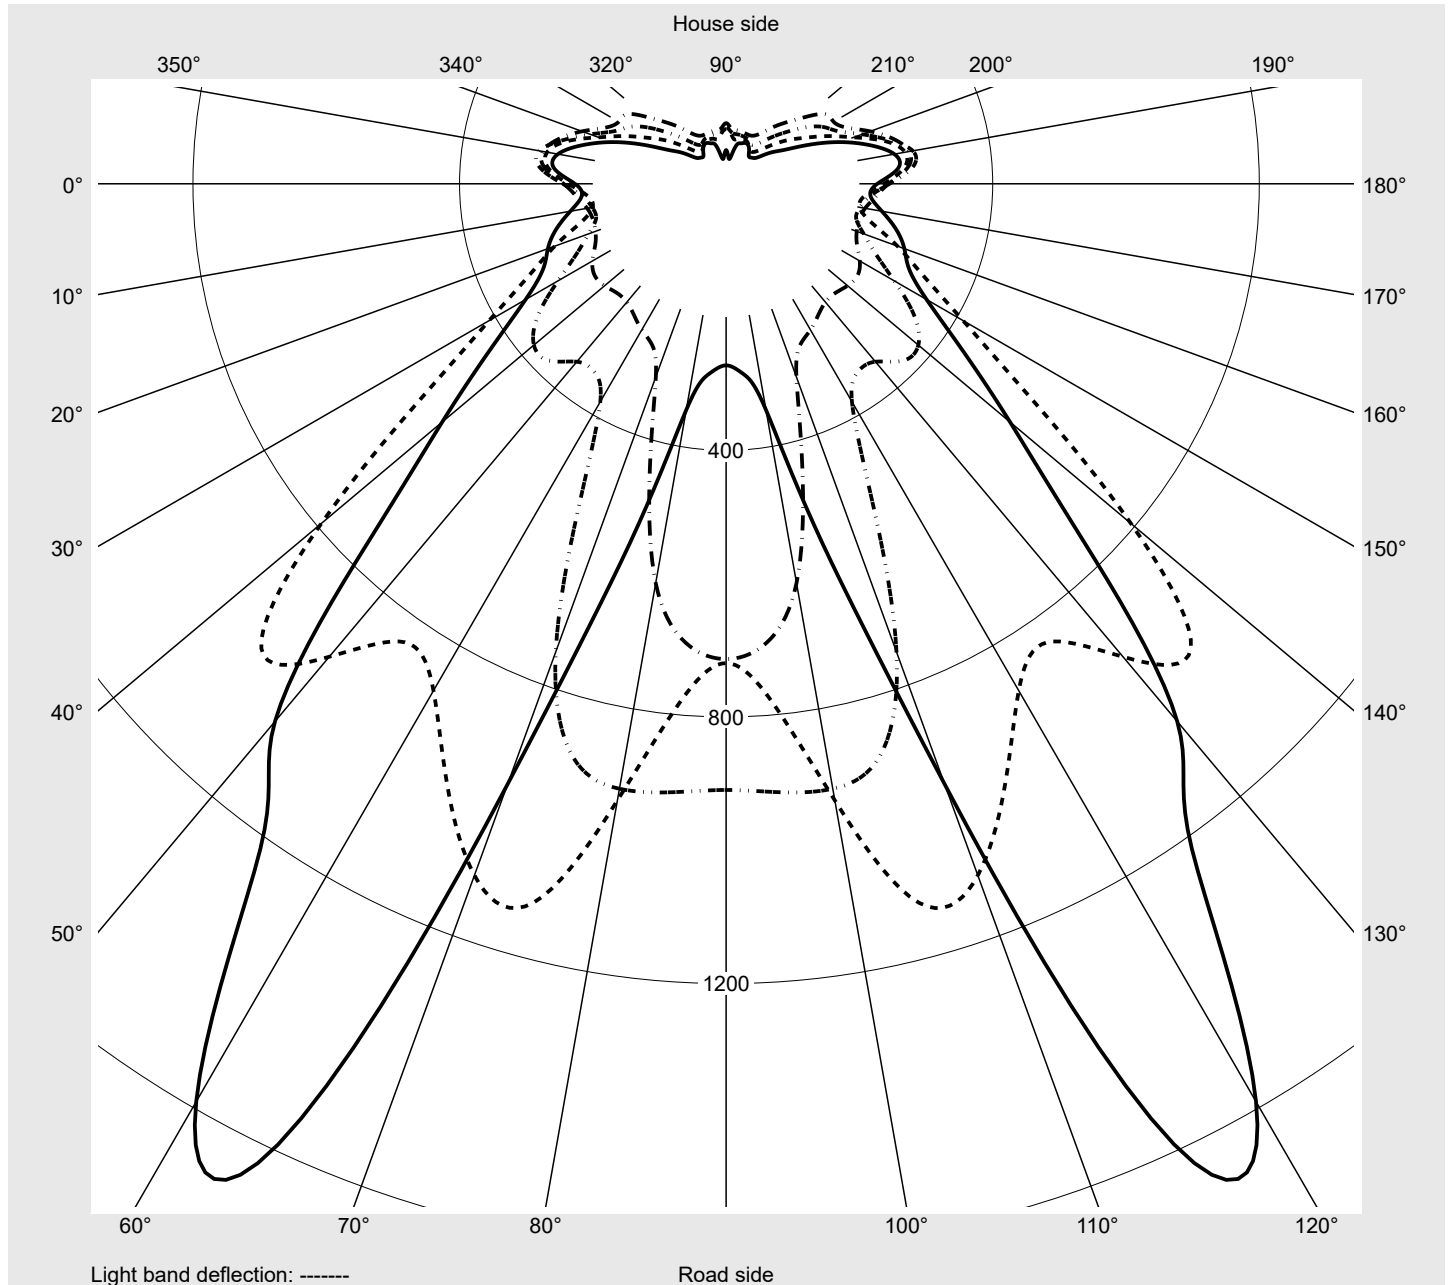

Photometric test report

Family Streetlight 31 midi		Order number: 5XH314AA08MA EAN: 4069025511805										LP number 59800_3108	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	147.5	147.7	148.2	148.8	149.3	149.7	150.1	150.5	151.0	151.2	151.6	152.0	152.3
5,0°	148.1	148.8	149.6	150.5	151.5	152.4	153.2	153.9	154.7	155.3	155.9	156.5	157.1
7,5°	149.3	150.3	151.6	152.8	154.2	155.5	156.6	157.8	159.2	160.4	161.7	162.9	164.0
10,0°	150.8	152.3	153.6	155.1	156.9	158.6	160.3	162.3	164.5	166.7	168.7	170.7	172.7
12,5°	153.2	154.9	156.6	158.7	161.0	163.3	165.3	167.1	169.4	172.2	175.8	179.6	183.1
15,0°	156.6	158.5	160.8	163.5	166.3	169.0	171.4	173.6	175.7	177.6	180.4	185.5	191.1
17,5°	161.5	163.7	165.7	168.4	171.4	174.3	177.0	179.5	181.8	183.8	185.5	187.5	192.4
20,0°	165.1	168.5	171.0	174.1	176.3	178.8	181.5	183.8	186.0	187.6	188.7	189.3	190.8
22,5°	170.7	173.7	176.7	179.6	182.3	183.8	185.7	187.4	188.8	189.6	190.1	190.2	190.2
25,0°	177.2	180.3	182.5	185.8	188.3	189.3	190.1	191.0	191.1	191.4	191.6	192.0	191.8
27,5°	185.9	187.9	189.7	191.7	194.6	195.2	194.7	194.3	194.0	193.7	193.9	193.9	193.7
30,0°	193.0	195.9	197.3	198.4	199.8	200.4	199.0	197.8	197.0	196.3	196.3	195.7	195.6
32,5°	202.5	203.8	204.8	205.0	204.9	205.6	203.7	201.6	199.4	198.4	198.6	198.6	199.0
35,0°	210.3	211.7	211.9	210.9	210.1	210.0	208.0	204.8	201.9	200.3	200.6	200.9	201.8
37,5°	218.4	218.5	218.4	216.2	214.8	213.6	210.9	207.5	204.3	202.5	202.1	202.7	204.0
40,0°	226.6	225.1	223.4	220.3	218.2	215.7	213.8	210.8	207.0	204.7	204.0	204.1	205.2
42,5°	233.9	229.3	226.2	222.7	220.0	216.1	214.2	213.0	209.1	206.7	205.1	204.2	205.2
45,0°	238.8	233.5	229.0	224.6	221.7	216.2	212.8	211.8	211.0	208.6	204.5	203.3	204.4
47,5°	243.2	236.1	230.3	225.1	221.5	216.3	212.1	210.9	212.5	209.4	204.2	202.8	204.8
50,0°	246.0	237.2	229.9	225.1	220.2	215.7	212.4	211.6	213.0	212.0	205.2	203.7	207.3
52,5°	247.8	236.6	228.3	223.7	218.6	215.2	213.5	211.8	210.7	212.9	207.8	206.9	211.4
55,0°	247.9	234.2	225.4	219.4	216.5	215.7	216.1	213.7	212.2	214.1	211.4	211.0	218.0
57,5°	246.4	228.9	221.1	214.7	212.3	214.4	219.6	220.1	220.0	219.1	218.0	220.4	228.4
60,0°	243.9	225.0	211.8	206.9	208.6	216.7	231.6	240.5	237.9	231.7	231.9	240.8	253.2
62,5°	245.1	216.4	204.0	202.1	219.7	247.1	291.2	344.6	376.5	375.3	348.5	344.6	377.6
65,0°	236.7	208.7	203.4	226.2	273.6	326.7	410.6	554.3	792.9	986.2	926.4	839.9	878.2
67,5°	226.9	217.7	237.4	264.1	284.6	303.0	347.4	430.5	556.2	758.6	1053.1	1218.6	1590.2
70,0°	247.8	237.5	209.5	169.9	135.0	120.2	130.6	174.7	263.5	365.7	478.5	659.1	732.5
72,5°	237.4	161.0	89.1	48.3	32.5	27.6	30.4	46.4	88.7	160.3	213.7	229.6	201.1
75,0°	143.2	55.4	21.7	14.2	13.6	13.8	14.9	18.8	28.2	61.4	101.5	106.9	95.1
77,5°	47.8	12.0	8.4	8.7	8.8	9.4	9.5	11.9	15.3	23.0	44.7	49.6	46.2
80,0°	13.7	5.3	5.2	5.5	5.6	5.7	6.0	6.7	8.9	11.1	18.7	22.1	20.1
82,5°	3.8	2.8	2.8	2.9	3.1	3.2	3.2	3.4	4.4	5.6	6.8	8.0	8.3
85,0°	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.4	1.5	1.8	1.8	2.0	2.1
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi		Order number: 5XH314AA08MA EAN: 4069025511805										LP number 59800_3108	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	152.7	153.0	153.2	153.2	153.4	153.5	147.3	146.7	146.6	146.4	146.0	145.8	145.7
5,0°	157.7	158.3	158.9	159.4	159.7	159.8	147.5	146.6	145.9	145.4	144.6	143.9	143.4
7,5°	164.8	165.6	166.6	167.6	168.5	168.9	148.1	146.7	145.7	144.6	143.5	142.5	141.5
10,0°	174.1	175.2	176.1	177.8	179.7	180.5	149.0	147.3	145.9	144.4	143.0	141.7	140.4
12,5°	186.1	188.0	188.5	190.1	192.9	194.3	150.8	148.8	147.0	145.2	143.5	141.9	140.2
15,0°	194.9	198.0	198.7	199.3	202.4	204.2	154.3	152.0	150.0	147.7	145.6	143.7	141.8
17,5°	197.2	200.0	201.4	200.6	203.1	205.6	158.6	155.9	153.1	150.5	148.2	146.3	144.5
20,0°	195.1	197.8	199.4	199.1	199.8	202.0	161.7	159.2	156.4	153.9	151.3	148.9	146.6
22,5°	192.1	194.9	196.8	197.2	198.2	200.5	166.8	164.9	162.7	159.7	156.7	153.4	150.1
25,0°	192.1	195.5	198.7	199.8	200.6	204.2	174.1	171.6	170.1	166.6	162.7	158.2	153.9
27,5°	193.7	197.8	203.2	205.9	206.1	212.2	182.4	180.0	177.2	174.5	169.6	164.3	158.6
30,0°	196.7	200.2	207.1	210.2	209.8	218.5	190.8	188.8	185.8	181.5	177.2	170.1	163.2
32,5°	200.4	202.9	207.4	209.5	209.7	221.2	199.9	198.2	195.3	190.2	183.6	177.8	169.1
35,0°	202.9	205.8	207.0	209.1	210.0	224.4	209.9	208.8	206.0	200.2	191.7	183.5	177.5
37,5°	205.5	207.9	208.8	209.9	211.5	226.8	219.1	219.1	216.5	210.2	201.5	192.0	184.1
40,0°	207.0	211.0	212.6	213.1	218.3	225.8	228.5	229.5	227.3	220.6	211.3	201.3	193.2
42,5°	207.4	214.2	217.3	222.1	232.8	235.9	237.6	239.8	238.5	230.8	220.7	210.2	201.3
45,0°	207.1	218.9	229.5	232.8	249.5	253.7	244.8	249.2	248.9	240.5	228.6	216.9	207.7
47,5°	209.7	228.2	240.7	241.1	256.8	261.3	251.4	257.6	256.9	247.5	234.2	221.7	212.8
50,0°	215.2	234.1	242.8	237.7	238.9	238.1	257.2	265.4	263.4	251.7	236.4	223.8	214.8
52,5°	220.9	235.8	236.6	229.8	233.4	232.8	261.7	271.8	267.6	251.8	235.1	223.1	213.7
55,0°	226.4	234.2	231.6	229.7	237.8	239.0	266.0	276.0	268.4	248.8	227.1	214.3	207.5
57,5°	233.5	241.3	246.5	256.4	286.3	304.6	270.1	278.4	265.8	240.1	211.7	198.4	196.3
60,0°	265.0	308.4	442.0	608.3	691.7	713.1	273.1	279.1	259.9	230.0	199.5	186.2	181.8
62,5°	512.4	747.5	889.7	921.7	916.4	909.5	280.5	284.4	253.3	217.1	186.3	169.9	148.4
65,0°	991.5	1104.2	1116.7	939.4	778.8	719.2	267.7	272.8	247.1	203.7	169.4	138.4	114.7
67,5°	1590.2	958.6	558.5	344.6	285.8	272.4	258.6	256.3	223.6	182.9	139.3	102.3	81.7
70,0°	537.1	294.1	225.4	185.0	161.2	154.1	255.2	236.8	199.7	151.2	100.0	71.6	52.6
72,5°	165.8	135.8	113.3	93.1	80.6	77.3	268.9	225.8	168.3	106.4	67.9	42.9	32.0
75,0°	81.3	69.7	58.1	47.9	41.3	39.0	209.6	194.3	131.3	68.9	39.4	24.4	21.9
77,5°	41.1	35.1	29.8	23.1	20.4	19.4	113.2	119.8	81.1	38.2	18.0	12.0	10.3
80,0°	19.4	18.5	14.4	12.2	10.1	9.5	35.9	42.5	34.6	17.3	8.0	5.5	5.5
82,5°	9.4	8.3	6.4	5.4	4.6	4.3	5.9	6.3	6.7	4.6	3.1	2.9	2.8
85,0°	2.8	2.5	2.1	1.7	1.6	1.6	1.2	1.2	1.3	1.3	1.2	1.2	1.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi				Order number: 5XH314AA08MA EAN: 4069025511805								LP number 59800_3108			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	0.2	0.2		
2,5°	145.4	145.3	145.0	144.9	144.8	144.7	144.6	144.6	144.7	144.9	144.9	1.8	2.0		
5,0°	142.7	142.2	141.7	141.3	140.9	140.6	140.4	140.3	140.3	140.3	140.3	3.6	5.6		
7,5°	140.6	139.6	138.8	138.1	137.6	137.0	136.8	136.6	136.6	136.5	136.5	5.4	10.9		
10,0°	139.1	138.0	136.9	136.1	135.2	134.5	133.9	133.6	133.7	133.7	133.6	7.3	18.2		
12,5°	138.7	137.3	136.1	134.9	133.7	132.7	131.9	131.5	131.4	131.8	131.8	9.3	27.5		
15,0°	140.0	138.1	136.2	134.7	133.4	132.2	131.4	131.0	130.7	130.7	130.7	11.4	38.8		
17,5°	142.5	140.2	138.4	136.2	134.2	132.2	130.6	129.3	128.7	128.6	128.8	13.4	52.3		
20,0°	144.2	141.9	140.0	137.4	135.3	133.0	131.0	129.5	128.6	128.3	128.7	15.4	67.7		
22,5°	147.1	144.0	141.1	138.8	137.2	134.9	132.7	130.9	129.7	129.2	129.8	17.5	85.2		
25,0°	150.2	146.7	143.4	140.7	138.4	136.9	134.9	132.9	131.3	130.7	131.5	19.8	105.0		
27,5°	153.7	149.7	146.2	143.2	140.7	139.1	137.1	135.3	133.7	132.7	133.4	22.2	127.1		
30,0°	157.3	153.1	149.3	146.2	143.5	141.8	140.3	138.2	136.7	135.6	136.0	24.6	151.7		
32,5°	162.1	157.6	154.1	150.9	147.7	146.0	144.9	142.3	140.4	139.2	139.3	27.1	178.9		
35,0°	169.0	164.0	160.6	157.1	153.9	151.5	149.5	147.5	145.4	144.5	145.2	29.8	208.7		
37,5°	178.8	171.9	168.3	164.4	160.7	157.8	155.9	154.3	152.1	150.8	152.0	32.6	241.2		
40,0°	185.7	181.5	176.5	172.6	168.7	165.3	163.3	161.4	159.8	158.8	159.4	35.4	276.7		
42,5°	193.6	188.5	185.1	180.2	176.1	172.4	170.4	169.0	167.7	167.1	167.0	38.3	315.0		
45,0°	200.4	194.5	191.9	186.5	182.4	178.5	176.3	175.0	173.8	173.2	172.7	41.1	356.1		
47,5°	205.3	199.5	194.5	190.9	185.5	182.2	179.7	176.1	172.4	170.3	168.9	43.6	399.7		
50,0°	208.4	201.3	194.6	191.6	184.2	173.6	162.9	154.0	148.2	146.2	145.4	44.8	444.5		
52,5°	206.4	199.4	191.9	178.7	162.3	145.0	134.4	128.6	126.0	125.2	126.9	45.3	489.8		
55,0°	200.5	191.0	170.8	149.3	134.4	119.4	111.2	108.0	106.6	106.9	113.6	45.5	535.3		
57,5°	187.9	163.3	140.7	121.7	106.4	96.3	91.1	91.9	92.2	90.7	95.9	46.2	581.5		
60,0°	156.2	131.6	111.6	93.4	83.4	80.7	81.0	81.4	81.8	83.6	91.0	54.7	636.2		
62,5°	122.4	100.3	81.4	71.0	71.2	74.7	75.5	76.2	75.9	78.9	84.8	71.9	708.1		
65,0°	91.4	71.9	62.2	62.1	67.3	71.5	71.2	69.9	68.0	76.5	82.1	98.8	806.9		
67,5°	61.6	55.3	53.3	60.0	66.6	67.6	64.6	59.9	41.5	39.8	50.4	92.9	899.8		
70,0°	41.4	43.0	52.6	58.9	58.4	53.9	42.9	19.0	17.9	28.3	40.2	49.4	949.3		
72,5°	31.6	38.8	44.5	44.5	38.5	31.6	16.1	14.2	13.4	20.8	26.1	24.8	974.0		
75,0°	25.4	29.3	31.2	27.4	22.3	15.1	12.2	10.5	9.6	12.1	13.2	14.0	988.0		
77,5°	11.8	16.6	15.7	12.8	11.4	9.8	8.8	7.0	5.7	5.6	6.5	7.1	995.1		
80,0°	5.8	6.3	6.9	6.8	6.3	5.8	5.2	4.0	2.9	1.7	1.4	3.1	998.2		
82,5°	3.0	3.3	3.5	3.5	3.8	3.3	2.9	2.2	1.7	1.3	1.1	1.2	999.4		
85,0°	1.3	1.4	1.5	1.5	1.5	1.5	1.4	1.3	1.1	1.0	1.0	0.4	999.8		
87,5°	0.8	0.8	0.9	0.9	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.2	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08MA EAN: 4069025511805	LP number 59800_3108
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	20490	145.3	161.8	153.6
95	237	251	19458	134.8	149.9	142.4
90	221	249	18443	125.3	139.1	132.2
85	206	246	17450	116.2	128.9	122.6
80	191	244	16416	107.3	119.1	113.2
75	176	241	15353	98.7	109.3	104.0
70	162	238	14328	90.6	100.2	95.4
65	149	234	13346	83.2	92.0	87.6
60	136	231	12331	75.7	83.7	79.7
55	123	227	11291	68.4	75.5	72.0
50	110	223	10220	61.1	67.5	64.3
45	98	219	9211	54.4	60.1	57.2
40	86	214	8176	47.7	52.7	50.2
35	75	209	7207	41.7	45.9	43.8
30	63	203	6127	35.2	38.7	37.0
25	52	196	5115	29.3	32.1	30.7
20	41	187	4087	23.5	25.7	24.6
15	30	176	3035	17.8	19.5	18.6
11	21	163	2163	13.2	14.3	13.8

Dimming levels table		environmental temperature: 5°C				
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	21140	146.9	163.6	155.2
95	238	252	20101	137.0	152.3	144.6
90	222	249	19022	127.4	141.4	134.4
85	207	247	17973	118.2	131.1	124.6
80	192	244	16892	109.2	121.1	115.2
75	178	241	15855	101.0	111.8	106.4
70	164	238	14794	93.0	102.7	97.8
65	151	235	13775	85.4	94.4	89.9
60	137	231	12649	77.3	85.4	81.4
55	125	228	11661	70.4	77.8	74.1
50	112	224	10565	63.1	69.6	66.4
45	100	220	9532	56.3	62.1	59.2
40	88	215	8479	49.5	54.7	52.1
35	76	210	7400	42.9	47.2	45.0
30	64	204	6302	36.3	39.8	38.0
25	53	197	5275	30.3	33.2	31.8
20	42	188	4232	24.4	26.7	25.5
15	31	177	3167	18.7	20.3	19.5
10	21	163	2187	13.4	14.5	14.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08MA EAN: 4069025511805	LP number 59800_3108
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	20840	146.1	162.7	154.4
95	237	251	19769	135.6	150.7	143.1
90	222	249	18786	126.6	140.5	133.6
85	206	246	17696	116.9	129.6	123.2
80	192	244	16706	108.5	120.4	114.4
75	177	241	15619	99.9	110.5	105.2
70	163	238	14574	91.8	101.4	96.6
65	150	235	13572	84.2	93.2	88.7
60	137	231	12542	76.8	84.8	80.8
55	124	228	11486	69.4	76.7	73.1
50	111	224	10400	62.1	68.5	65.3
45	99	219	9380	55.3	61.1	58.2
40	87	215	8334	48.6	53.7	51.2
35	75	209	7264	42.0	46.2	44.1
30	64	204	6266	36.0	39.5	37.8
25	53	197	5246	30.1	33.0	31.6
20	42	188	4210	24.2	26.5	25.4
15	31	177	3152	18.5	20.2	19.4
10	21	163	2177	13.3	14.4	13.8

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08MA EAN: 4069025511805	LP number 59800_3108
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	20490.0	145.3
5.0	21140.0	146.9
15.0	20840.0	146.1