

Photometric test report

Family

Streetlight 31 midi



Order number: 5XH314AA08QA

EAN: 4069025511850

LP number

59798_1787

serial documentation

22.08.2025

siteco

Version

post-top or side-entry mounting

Optic

asymmetric distribution (PL32G)

Cover

toughened safety glass

Lamps

LED 4000 K | CRI ≥ 70

Controlgear


ECG SITECO

Rated values

Net luminous flux = 24750 lm

Power consumption = 161.5 W


Luminous efficacy = 153.3 lm/W

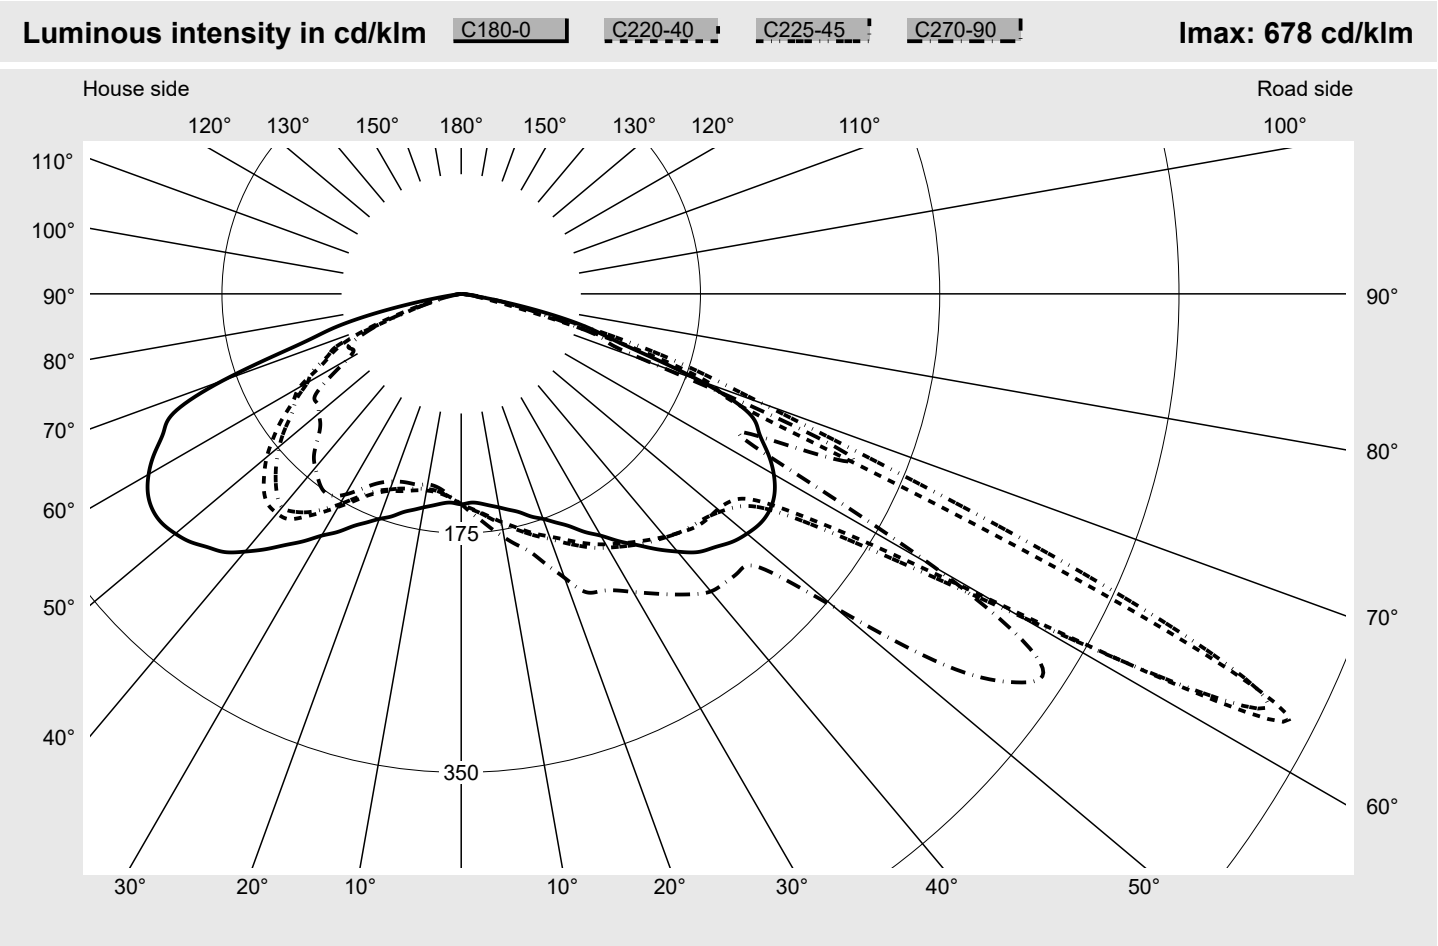

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	623.9
Eta 90° - 180°	0.0%	Imax 80°	57.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08QA EAN: 4069025511850	LP number 59798_1787
Envelope curve in cd/klm	KMK 62.5° KMK 60° KMK 57.5° KMK 55°	siteco

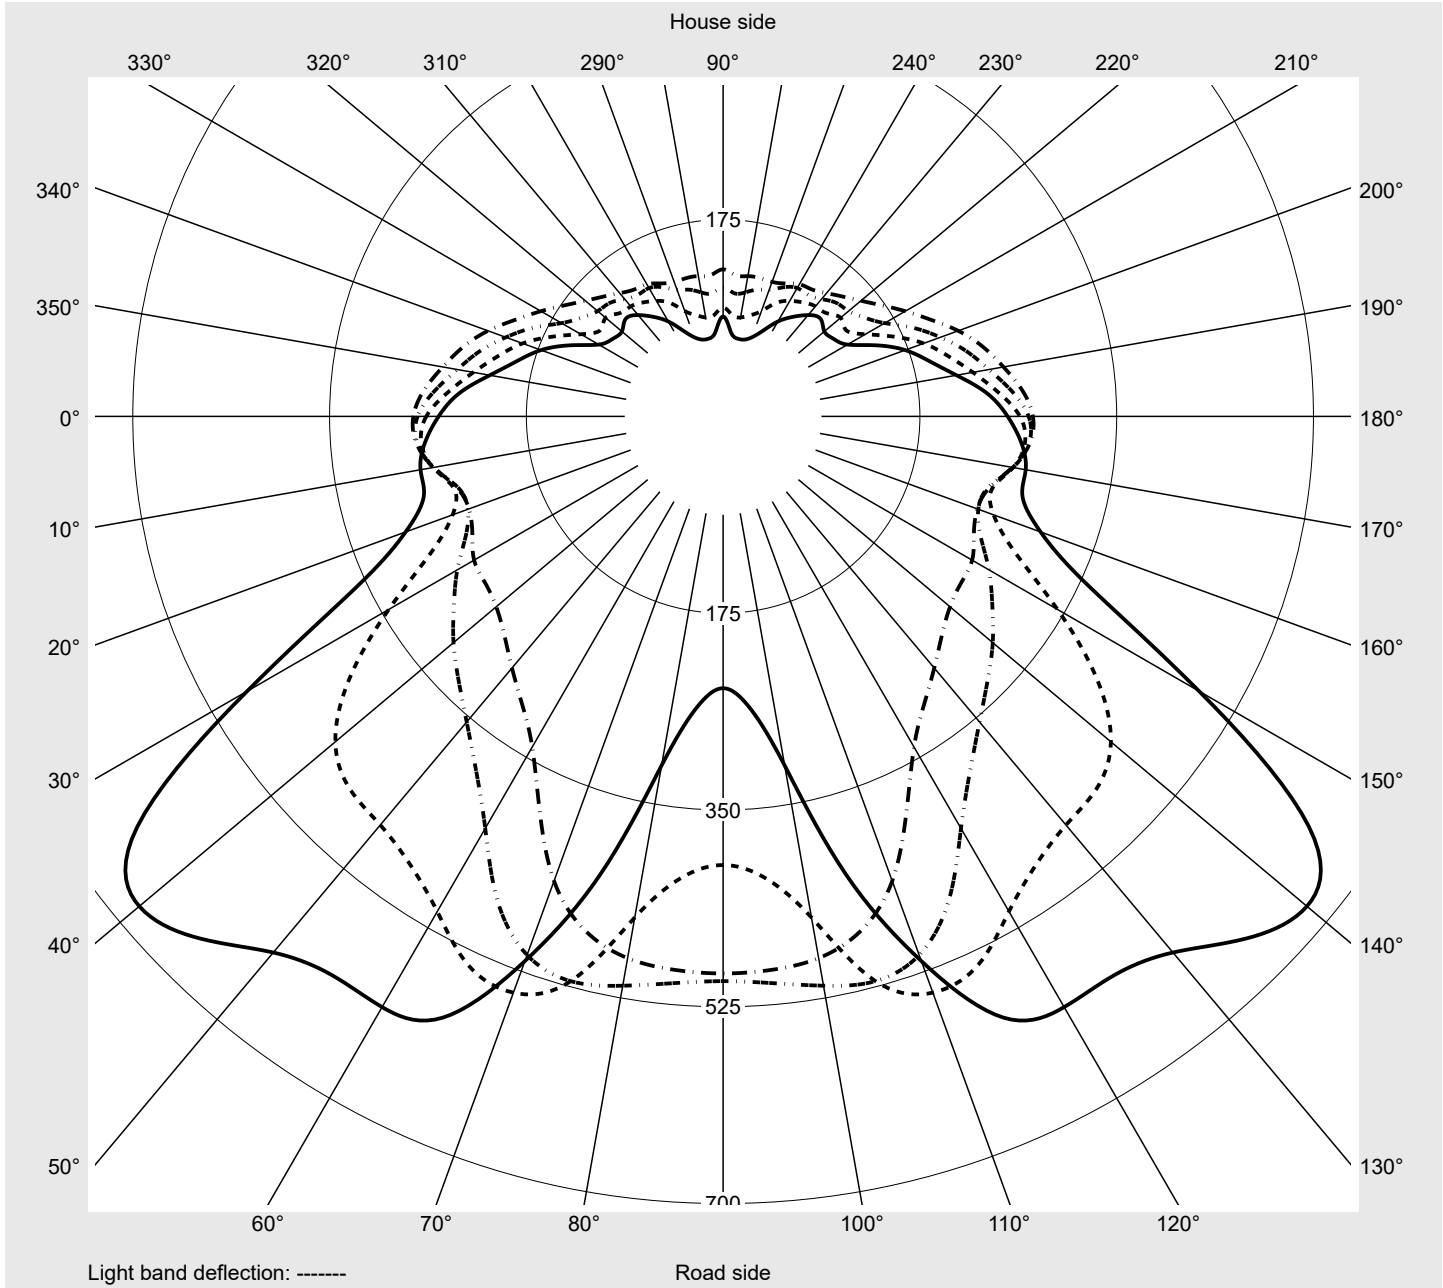

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08QA EAN: 4069025511850	LP number 59798_1787
-------------------------------	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	152.9	153.3	153.8	154.4	154.9	155.4	156.0	156.5	157.0	157.5	157.9	158.3	158.7
5,0°	153.8	154.6	155.4	156.5	157.5	158.3	158.9	159.7	160.5	161.0	161.6	162.2	162.9
7,5°	156.0	157.1	158.0	159.2	160.3	161.4	162.4	163.6	164.7	165.8	166.8	167.8	168.6
10,0°	158.6	159.8	160.7	162.1	163.6	165.0	166.3	167.8	169.4	170.8	172.3	173.6	174.7
12,5°	161.8	162.9	164.3	166.1	167.9	169.6	171.0	172.5	174.0	175.6	177.3	178.9	180.3
15,0°	165.4	166.9	168.3	170.4	172.5	174.3	176.0	177.5	179.2	180.7	182.1	184.2	186.5
17,5°	170.8	172.0	173.2	175.2	177.0	179.0	180.8	182.5	184.2	185.9	187.6	189.5	193.3
20,0°	175.2	177.6	179.4	180.6	182.3	183.8	185.4	187.0	188.9	190.8	193.3	195.6	198.8
22,5°	181.0	183.3	185.4	187.4	188.4	189.3	190.5	192.0	194.2	197.0	200.2	203.5	206.3
25,0°	187.6	190.1	191.6	193.7	195.1	195.1	195.8	197.7	200.2	203.2	206.9	210.2	213.0
27,5°	196.4	198.0	199.0	200.0	201.5	201.5	201.7	203.7	206.2	209.3	212.5	215.7	218.7
30,0°	204.2	206.2	206.7	206.7	207.3	207.7	207.4	209.4	211.5	214.4	217.0	219.4	222.1
32,5°	214.5	215.1	214.9	213.5	212.7	212.7	212.5	214.6	216.5	219.1	221.3	223.8	226.6
35,0°	224.3	224.9	223.5	220.7	217.8	217.6	217.3	220.0	221.5	223.9	226.4	229.1	232.2
37,5°	235.5	234.4	231.5	226.7	222.7	222.0	221.6	224.9	226.7	228.3	230.7	233.9	237.1
40,0°	246.1	244.1	238.9	231.2	227.0	225.6	225.6	229.6	231.8	232.5	234.7	237.4	240.3
42,5°	256.1	251.5	243.7	234.8	230.4	228.4	229.6	234.7	236.8	236.6	237.3	239.0	242.2
45,0°	262.1	258.4	248.9	238.5	233.4	230.6	232.6	238.8	241.5	239.6	239.3	241.4	245.8
47,5°	268.6	264.5	253.2	241.5	235.7	233.5	235.8	240.9	243.9	242.5	242.8	246.1	252.5
50,0°	272.9	269.4	256.7	243.7	237.1	236.9	240.1	244.1	245.1	247.7	250.1	255.0	265.8
52,5°	275.7	272.4	259.2	245.1	239.2	241.2	245.9	248.1	248.9	255.6	263.8	274.7	290.4
55,0°	275.5	273.8	261.2	245.1	240.6	246.1	255.7	258.3	263.4	275.1	292.1	311.9	339.5
57,5°	271.7	273.1	261.7	244.1	241.5	252.6	273.0	292.3	313.0	332.6	354.8	383.3	423.1
60,0°	264.0	269.5	261.9	247.8	256.0	286.6	343.4	405.3	450.2	469.1	474.4	485.9	508.4
62,5°	253.0	266.1	273.3	275.7	300.5	360.4	488.8	635.9	677.8	656.9	622.4	606.6	606.6
65,0°	240.3	274.2	286.5	273.7	264.1	275.7	311.3	384.1	511.5	564.9	556.9	590.7	600.5
67,5°	227.7	249.1	236.1	196.9	168.4	167.8	182.1	207.7	249.4	360.6	503.8	535.0	349.3
70,0°	185.7	185.4	184.1	169.0	150.8	152.0	157.7	172.3	195.9	234.0	284.0	366.9	498.5
72,5°	126.9	155.2	171.0	150.9	111.5	93.7	90.0	103.8	134.0	166.6	192.6	201.1	236.6
75,0°	96.9	117.8	119.7	83.1	44.1	31.7	30.5	39.5	61.7	98.4	139.1	154.4	150.9
77,5°	60.5	54.0	41.1	25.1	13.3	11.4	11.3	14.3	24.0	44.4	79.4	107.8	98.4
80,0°	22.7	9.2	5.9	6.4	6.7	6.7	6.6	7.4	10.8	16.5	36.0	55.9	57.0
82,5°	4.1	2.8	3.0	3.2	3.4	3.5	3.5	3.8	4.8	7.4	13.0	24.0	27.7
85,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	2.0	2.7	5.0	6.9
87,5°	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08QA EAN: 4069025511850	LP number 59798_1787
-------------------------------	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9
2,5°	159.1	159.4	159.7	159.8	159.9	160.0	152.4	151.8	151.6	151.3	150.9	150.6	150.4
5,0°	163.7	164.5	165.1	165.6	166.1	166.3	152.8	151.7	150.9	150.3	149.5	148.7	148.0
7,5°	169.4	170.2	171.2	172.3	173.2	173.6	154.4	152.8	151.7	150.4	149.3	148.1	147.1
10,0°	175.5	176.3	177.2	178.7	180.2	180.9	156.5	154.6	153.1	151.7	150.1	148.7	147.4
12,5°	181.6	182.5	183.3	184.9	187.0	188.0	159.7	157.3	155.6	153.7	152.0	150.4	148.5
15,0°	188.7	190.7	191.4	192.4	194.5	195.4	163.4	160.8	158.9	156.9	154.7	152.7	150.9
17,5°	198.0	202.0	204.3	204.2	206.1	207.7	168.2	165.4	162.6	160.0	157.6	155.4	153.3
20,0°	206.1	212.8	217.8	217.6	218.8	221.0	172.1	169.3	166.3	163.1	160.2	157.5	155.2
22,5°	211.5	220.9	227.4	228.6	229.6	235.8	177.3	174.5	171.9	168.2	164.7	161.6	159.2
25,0°	216.0	224.8	231.2	232.8	233.2	240.0	184.4	180.8	178.1	174.8	170.8	167.5	165.0
27,5°	220.8	226.8	232.8	234.6	234.6	244.5	192.9	189.3	185.7	183.1	179.7	176.3	173.6
30,0°	224.8	229.3	236.4	238.7	238.5	251.8	201.8	198.4	194.5	190.6	188.8	185.4	182.4
32,5°	229.5	233.4	241.7	245.6	245.0	259.8	211.7	208.7	205.0	201.0	197.7	196.5	192.8
35,0°	234.9	238.7	246.3	252.1	252.4	268.4	222.9	220.0	216.2	212.5	208.5	205.4	204.0
37,5°	240.1	243.6	251.3	261.6	263.1	277.0	234.2	231.2	227.2	223.4	219.2	215.1	210.2
40,0°	243.8	247.9	256.6	273.9	278.8	284.1	245.3	242.2	237.9	233.5	228.7	223.0	216.7
42,5°	246.4	252.9	262.7	285.1	288.5	286.1	255.1	251.8	247.3	241.9	235.3	227.8	219.2
45,0°	251.6	260.7	270.1	282.6	289.1	287.3	261.5	259.0	254.5	247.6	239.1	229.2	216.9
47,5°	261.0	273.6	281.2	289.3	296.3	296.3	266.6	262.3	257.3	249.7	238.9	225.6	210.4
50,0°	279.0	298.4	311.8	330.3	349.0	357.1	270.0	263.8	255.6	246.5	233.4	217.1	200.4
52,5°	315.1	351.1	385.6	420.3	441.3	446.2	270.7	260.9	250.0	237.0	221.3	205.0	187.3
55,0°	386.3	439.7	473.6	489.2	494.1	495.4	267.0	253.2	239.2	222.5	203.6	187.1	172.2
57,5°	474.9	509.7	520.2	514.1	506.0	502.2	257.7	240.1	224.0	205.6	186.4	165.9	153.3
60,0°	537.7	545.3	519.2	452.5	411.2	399.0	245.7	225.6	207.2	189.8	167.7	146.1	133.5
62,5°	590.0	515.5	421.5	315.3	258.8	241.7	235.6	210.7	189.9	172.3	149.6	127.7	120.1
65,0°	483.5	302.1	187.1	194.0	243.5	258.9	209.5	187.8	172.2	155.2	131.6	112.6	104.5
67,5°	189.2	219.9	403.6	398.0	335.1	304.9	192.4	159.6	147.1	135.6	113.1	96.5	91.2
70,0°	623.9	488.5	293.6	190.4	158.1	150.3	173.4	146.1	127.2	114.7	96.8	80.7	75.9
72,5°	266.8	208.4	157.0	131.3	114.1	109.4	118.5	122.0	114.7	96.9	76.6	64.1	54.6
75,0°	143.3	125.1	104.9	89.5	77.5	73.1	62.5	68.5	86.0	79.6	61.7	45.1	32.8
77,5°	87.4	73.2	61.5	52.2	46.1	43.5	37.1	27.9	43.3	49.7	37.5	21.9	11.8
80,0°	48.8	40.2	34.1	29.5	25.5	23.9	17.2	9.9	14.2	20.5	16.7	6.9	6.2
82,5°	23.2	19.1	15.7	13.5	11.6	10.9	3.9	3.1	3.7	4.7	4.1	3.1	3.1
85,0°	7.4	6.0	4.9	4.0	3.5	3.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3
87,5°	0.7	0.7	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi		Order number: 5XH314AA08QA EAN: 4069025511850										LP number 59798_1787	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	153.9	0.2	0.2
2,5°	150.1	149.8	149.7	149.6	149.4	149.3	149.3	149.3	149.3	149.4	149.4	1.8	2.1
5,0°	147.4	146.7	146.1	145.7	145.4	145.0	144.8	144.8	144.8	144.9	144.9	3.7	5.8
7,5°	146.1	145.0	144.3	143.6	143.0	142.5	142.1	142.1	142.1	142.2	142.1	5.6	11.3
10,0°	146.1	145.0	143.9	143.2	142.4	141.8	141.3	141.2	141.3	141.4	141.5	7.5	18.9
12,5°	147.1	145.9	144.8	143.9	143.2	142.7	142.5	142.6	142.8	142.9	143.0	9.6	28.5
15,0°	149.1	147.5	146.3	145.0	144.1	143.4	142.9	142.9	143.0	143.3	143.4	11.7	40.2
17,5°	151.3	149.3	147.8	147.0	146.1	145.1	144.5	144.0	143.9	143.9	144.2	14.0	54.2
20,0°	153.3	152.2	151.1	150.0	149.0	148.1	147.2	146.4	145.9	145.8	146.1	16.4	70.7
22,5°	157.3	155.7	154.9	154.3	153.1	152.0	150.8	149.8	149.0	148.7	149.1	19.0	89.6
25,0°	162.9	161.3	160.4	159.5	158.9	157.6	156.3	155.0	154.1	153.6	154.2	21.6	111.3
27,5°	171.1	168.6	168.0	167.0	166.0	165.1	163.7	162.7	161.7	161.1	161.6	24.4	135.7
30,0°	179.9	177.7	176.3	175.3	174.1	172.9	171.9	170.8	169.7	169.1	169.5	27.4	163.1
32,5°	189.5	186.7	185.2	183.1	181.4	180.1	179.0	177.4	176.0	175.1	175.0	30.5	193.6
35,0°	198.9	194.9	192.0	189.5	186.2	183.6	181.9	179.0	176.9	175.6	175.8	33.6	227.2
37,5°	207.6	200.8	196.1	191.4	185.8	181.2	178.5	175.5	173.1	171.7	171.5	36.5	263.8
40,0°	209.5	203.8	195.1	187.8	180.7	175.2	171.9	169.1	166.9	165.8	166.0	39.3	303.0
42,5°	209.0	199.4	190.8	181.1	173.4	167.7	164.3	161.7	159.7	159.1	159.3	41.7	344.7
45,0°	204.0	191.9	183.0	172.6	165.1	159.6	156.3	152.5	149.3	147.7	147.8	43.7	388.4
47,5°	195.4	183.3	173.3	165.6	156.8	149.0	143.9	140.5	138.4	138.2	139.8	45.6	434.0
50,0°	185.6	173.6	164.0	154.2	144.2	138.5	137.0	136.0	134.9	134.8	136.0	48.2	482.2
52,5°	173.2	162.6	152.2	141.9	140.0	135.1	132.1	130.8	129.2	128.9	132.2	52.1	534.3
55,0°	160.0	150.6	143.1	137.8	135.7	130.5	127.3	127.3	126.6	126.0	130.8	56.4	590.7
57,5°	145.7	142.6	136.2	132.0	131.8	126.7	119.8	116.6	111.9	110.1	114.6	60.7	651.4
60,0°	136.4	129.9	127.7	123.8	118.6	111.3	99.7	93.1	89.3	90.6	96.7	65.1	716.5
62,5°	117.5	122.6	117.6	108.0	97.4	84.2	74.8	70.7	70.4	75.9	88.8	70.5	787.0
65,0°	105.1	107.7	103.0	86.6	70.4	62.2	58.9	58.0	57.6	65.6	91.0	59.1	846.2
67,5°	91.4	95.9	78.9	58.2	51.3	50.5	50.5	45.2	40.7	48.6	78.6	48.7	894.8
70,0°	68.4	57.8	51.5	42.6	42.2	44.3	38.5	25.7	21.0	30.1	60.3	43.2	938.0
72,5°	43.3	34.9	32.5	34.1	37.1	35.6	20.9	16.3	17.0	20.4	34.9	27.8	965.8
75,0°	25.0	22.6	25.6	29.5	28.0	20.4	14.3	12.0	11.5	12.4	17.2	17.6	983.3
77,5°	11.6	14.3	17.1	18.0	15.2	11.7	10.3	8.3	6.8	6.6	10.8	9.5	992.9
80,0°	6.5	7.0	8.1	8.5	8.0	7.4	6.3	4.9	3.3	2.0	1.6	4.4	997.3
82,5°	3.3	3.6	4.1	4.1	4.3	4.1	3.3	2.5	1.9	1.2	1.0	1.9	999.2
85,0°	1.4	1.5	1.6	1.6	1.7	1.7	1.5	1.3	1.0	0.9	0.9	0.6	999.8
87,5°	0.7	0.8	0.8	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08QA EAN: 4069025511850	LP number 59798_1787
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	24750	161.5	175.9	168.7
95	238	252	23485	150.8	164.1	157.4
90	223	249	22255	140.9	153.4	147.2
85	209	247	21078	131.8	143.3	137.6
80	194	244	19789	121.9	132.6	127.2
75	180	241	18528	113.2	122.8	118.0
70	167	239	17348	104.9	113.9	109.4
65	153	235	16047	96.1	104.3	100.2
60	140	232	14817	88.0	95.4	91.7
55	128	229	13656	80.6	87.3	83.9
50	115	225	12380	72.6	78.5	75.6
45	103	221	11182	65.2	70.5	67.8
40	90	216	9856	57.3	61.9	59.6
35	78	211	8618	50.1	54.1	52.1
30	67	205	7469	43.6	46.8	45.2
25	55	198	6195	36.8	39.5	38.2
20	43	189	4902	30.0	32.1	31.0
15	32	178	3704	23.8	25.3	24.6
10	21	163	2492	16.6	18.0	17.3
9	18	157	2159	14.3	15.5	14.9

Dimming levels table		environmental temperature: 5°C					
-----------------------------	--	---------------------------------------	--	--	--	--	--

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	25490	163.5	178.0	170.8
95	239	252	24229	153.4	166.9	160.2
90	224	249	22941	143.4	156.1	149.8
85	210	247	21701	134.1	145.8	140.0
80	196	245	20432	125.0	135.8	130.4
75	182	242	19134	116.1	125.9	121.0
70	168	239	17816	107.0	116.2	111.6
65	155	236	16569	98.7	107.1	102.9
60	142	233	15300	90.5	98.1	94.3
55	129	229	14006	82.3	89.2	85.8
50	116	225	12696	74.2	80.4	77.3
45	104	221	11469	66.8	72.2	69.5
40	92	217	10216	59.5	64.2	61.8
35	80	212	8955	52.1	56.2	54.2
30	68	206	7678	44.9	48.2	46.6
25	56	199	6383	37.9	40.7	39.3
20	44	190	5074	31.1	33.2	32.2
15	33	179	3857	24.8	26.4	25.6
10	21	163	2519	16.9	18.3	17.6
9	18	157	2182	14.6	15.8	15.2

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08QA EAN: 4069025511850	LP number 59798_1787
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	25150	162.4	176.9	169.6
95	239	252	23925	152.4	165.9	159.2
90	224	249	22668	142.4	155.1	148.8
85	209	247	21368	132.6	144.2	138.4
80	195	244	20130	123.5	134.2	128.8
75	181	242	18850	114.6	124.3	119.4
70	168	239	17647	106.3	115.4	110.8
65	154	236	16324	97.4	105.6	101.5
60	141	232	15073	89.2	96.8	93.0
55	128	229	13794	81.1	87.9	84.5
50	116	225	12600	73.7	79.8	76.8
45	103	221	11285	65.7	71.0	68.4
40	91	216	10045	58.4	63.0	60.7
35	79	211	8794	51.1	55.2	53.2
30	67	205	7527	44.0	47.2	45.6
25	55	198	6241	37.1	39.8	38.4
20	44	190	5048	30.8	32.9	31.8
15	32	178	3728	24.0	25.5	24.8
10	21	163	2507	16.7	18.1	17.4
9	18	157	2172	14.5	15.6	15.0

Photometric test report

Family Streetlight 31 midi	Order number: 5XH314AA08QA EAN: 4069025511850	LP number 59798_1787
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	24750.0	161.5
5.0	25490.0	163.5
15.0	25150.0	162.4