

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH714AT08MA
EAN: 4069025514080

LP number
59800_4030



Version post-top or side-entry mounting, Smart Interface up/down
Optic asymmetric distribution (PL32)
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO - Smart Interface
Rated values Net luminous flux = 20270 lm
 Power consumption = 142.8 W
 Luminous efficacy = 141.9 lm/W

serial
documentation
26.08.2025

siteco

Luminous intensity in cd/klm


C180-0

C245-65

C250-70

C270-90

Imax: 1590 cd/klm

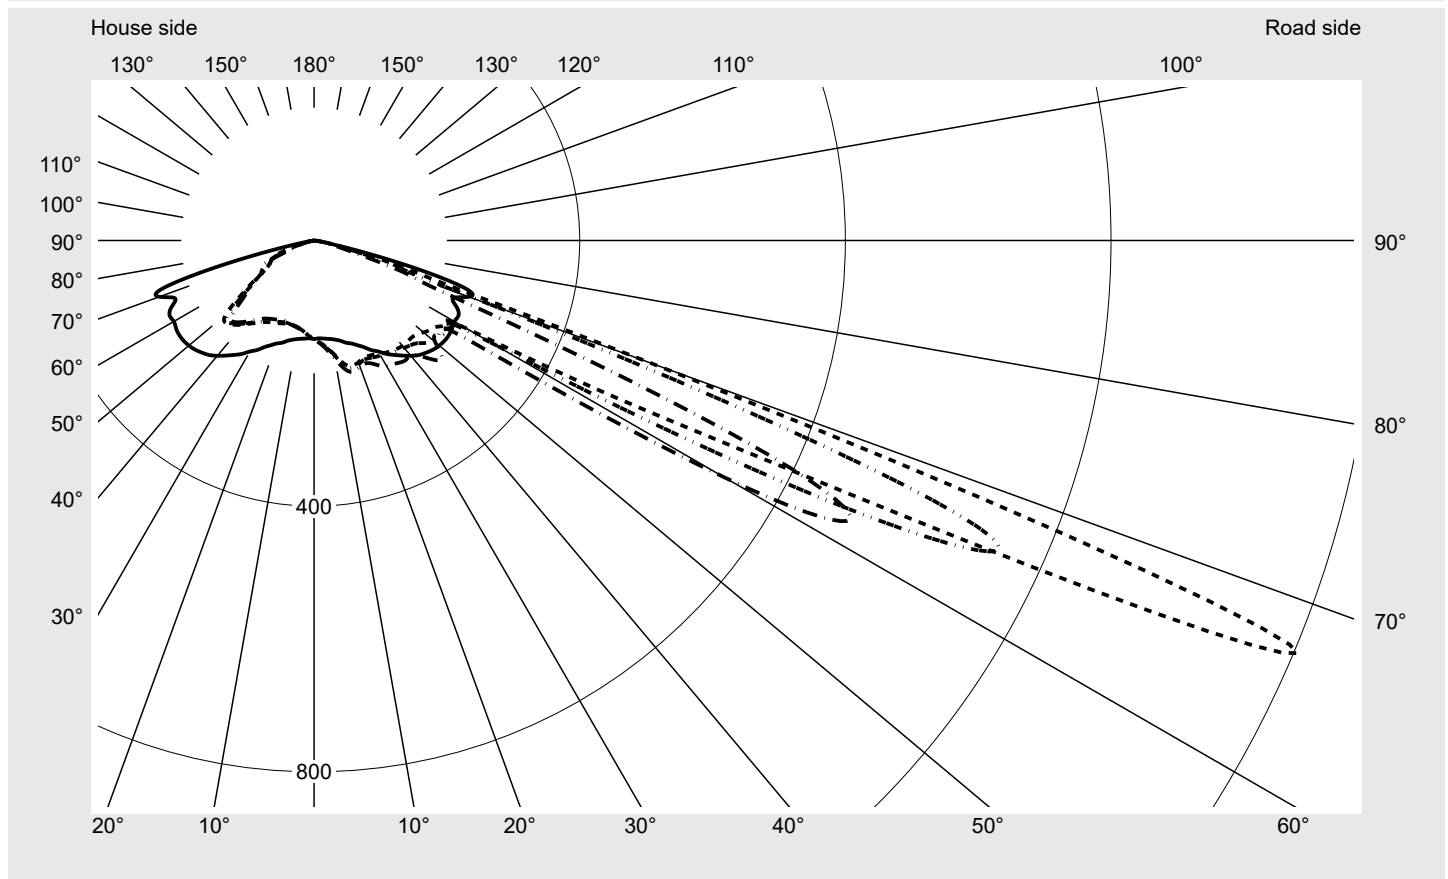

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	732.5
Imax 80°	42.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH714AT08MA
EAN: 4069025514080

LP number
59800_4030

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

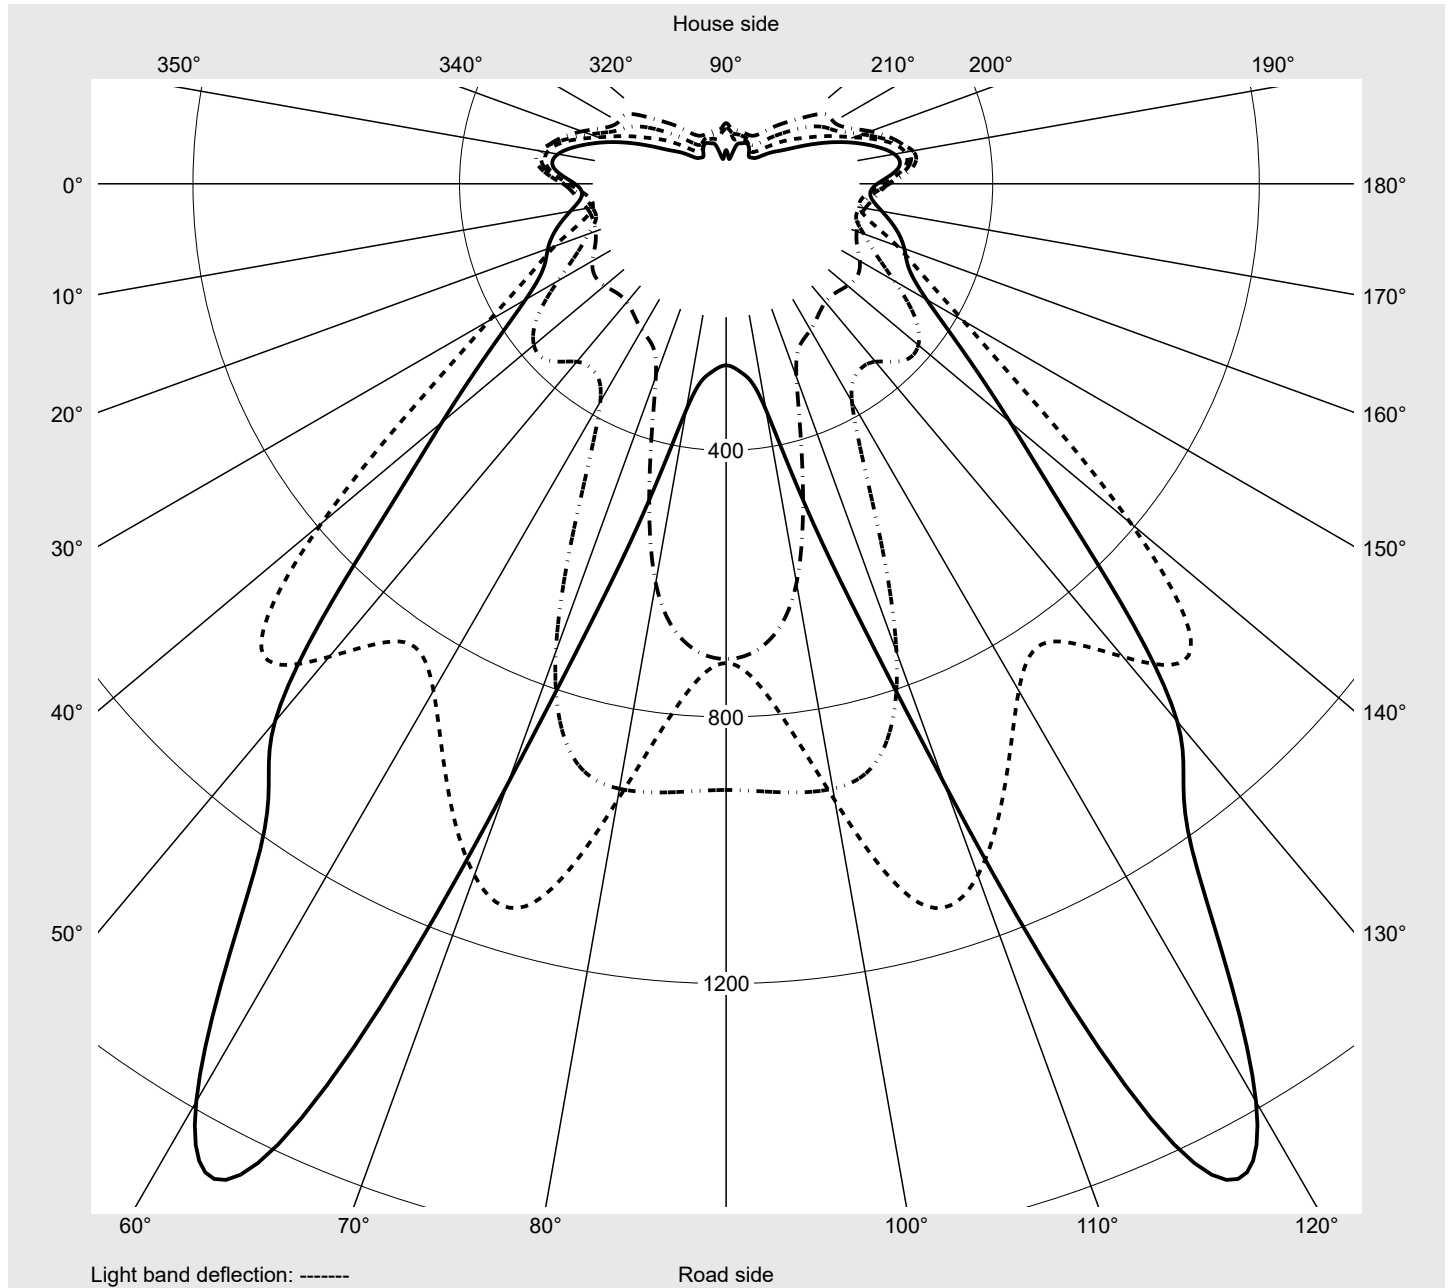

Photometric test report

Family Streetlight 31 midi toolless		Order number: 5XH714AT08MA EAN: 4069025514080										LP number 59800_4030	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	147.5	147.7	148.2	148.8	149.3	149.7	150.1	150.5	151.0	151.2	151.6	152.0	152.3
5,0°	148.1	148.8	149.6	150.5	151.5	152.4	153.2	153.9	154.7	155.3	155.9	156.5	157.1
7,5°	149.3	150.3	151.6	152.8	154.2	155.5	156.6	157.8	159.2	160.4	161.7	162.9	164.0
10,0°	150.8	152.3	153.6	155.1	156.9	158.6	160.3	162.3	164.5	166.7	168.7	170.7	172.7
12,5°	153.2	154.9	156.6	158.7	161.0	163.3	165.3	167.1	169.4	172.2	175.8	179.6	183.1
15,0°	156.6	158.5	160.8	163.5	166.3	169.0	171.4	173.6	175.7	177.6	180.4	185.5	191.1
17,5°	161.5	163.7	165.7	168.4	171.4	174.3	177.0	179.5	181.8	183.8	185.5	187.5	192.4
20,0°	165.1	168.5	171.0	174.1	176.3	178.8	181.5	183.8	186.0	187.6	188.7	189.3	190.8
22,5°	170.7	173.7	176.7	179.6	182.3	183.8	185.7	187.4	188.8	189.6	190.1	190.2	190.2
25,0°	177.2	180.3	182.5	185.8	188.3	189.3	190.1	191.0	191.1	191.4	191.6	192.0	191.8
27,5°	185.9	187.9	189.7	191.7	194.6	195.2	194.7	194.3	194.0	193.7	193.9	193.9	193.7
30,0°	193.0	195.9	197.3	198.4	199.8	200.4	199.0	197.8	197.0	196.3	196.3	195.7	195.6
32,5°	202.5	203.8	204.8	205.0	204.9	205.6	203.7	201.6	199.4	198.4	198.6	198.6	199.0
35,0°	210.3	211.7	211.9	210.9	210.1	210.0	208.0	204.8	201.9	200.3	200.6	200.9	201.8
37,5°	218.4	218.5	218.4	216.2	214.8	213.6	210.9	207.5	204.3	202.5	202.1	202.7	204.0
40,0°	226.6	225.1	223.4	220.3	218.2	215.7	213.8	210.8	207.0	204.7	204.0	204.1	205.2
42,5°	233.9	229.3	226.2	222.7	220.0	216.1	214.2	213.0	209.1	206.7	205.1	204.2	205.2
45,0°	238.8	233.5	229.0	224.6	221.7	216.2	212.8	211.8	211.0	208.6	204.5	203.3	204.4
47,5°	243.2	236.1	230.3	225.1	221.5	216.3	212.1	210.9	212.5	209.4	204.2	202.8	204.8
50,0°	246.0	237.2	229.9	225.1	220.2	215.7	212.4	211.6	213.0	212.0	205.2	203.7	207.3
52,5°	247.8	236.6	228.3	223.7	218.6	215.2	213.5	211.8	210.7	212.9	207.8	206.9	211.4
55,0°	247.9	234.2	225.4	219.4	216.5	215.7	216.1	213.7	212.2	214.1	211.4	211.0	218.0
57,5°	246.4	228.9	221.1	214.7	212.3	214.4	219.6	220.1	220.0	219.1	218.0	220.4	228.4
60,0°	243.9	225.0	211.8	206.9	208.6	216.7	231.6	240.5	237.9	231.7	231.9	240.8	253.2
62,5°	245.1	216.4	204.0	202.1	219.7	247.1	291.2	344.6	376.5	375.3	348.5	344.6	377.6
65,0°	236.7	208.7	203.4	226.2	273.6	326.7	410.6	554.3	792.9	986.2	926.4	839.9	878.2
67,5°	226.9	217.7	237.4	264.1	284.6	303.0	347.4	430.5	556.2	758.6	1053.1	1218.6	1590.2
70,0°	247.8	237.5	209.5	169.9	135.0	120.2	130.6	174.7	263.5	365.7	478.5	659.1	732.5
72,5°	237.4	161.0	89.1	48.3	32.5	27.6	30.4	46.4	88.7	160.3	213.7	229.6	201.1
75,0°	143.2	55.4	21.7	14.2	13.6	13.8	14.9	18.8	28.2	61.4	101.5	106.9	95.1
77,5°	47.8	12.0	8.4	8.7	8.8	9.4	9.5	11.9	15.3	23.0	44.7	49.6	46.2
80,0°	13.7	5.3	5.2	5.5	5.6	5.7	6.0	6.7	8.9	11.1	18.7	22.1	20.1
82,5°	3.8	2.8	2.8	2.9	3.1	3.2	3.2	3.4	4.4	5.6	6.8	8.0	8.3
85,0°	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.4	1.5	1.8	1.8	2.0	2.1
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family				Order number: 5XH714AT08MA								LP number			
Streetlight 31 midi toolless				EAN: 4069025514080								59800_4030			
Table of values for luminous intensities												Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°		
γ	Luminous intensity in cd/klm														
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3		
2,5°	152.7	153.0	153.2	153.2	153.4	153.5	147.3	146.7	146.6	146.4	146.0	145.8	145.7		
5,0°	157.7	158.3	158.9	159.4	159.7	159.8	147.5	146.6	145.9	145.4	144.6	143.9	143.4		
7,5°	164.8	165.6	166.6	167.6	168.5	168.9	148.1	146.7	145.7	144.6	143.5	142.5	141.5		
10,0°	174.1	175.2	176.1	177.8	179.7	180.5	149.0	147.3	145.9	144.4	143.0	141.7	140.4		
12,5°	186.1	188.0	188.5	190.1	192.9	194.3	150.8	148.8	147.0	145.2	143.5	141.9	140.2		
15,0°	194.9	198.0	198.7	199.3	202.4	204.2	154.3	152.0	150.0	147.7	145.6	143.7	141.8		
17,5°	197.2	200.0	201.4	200.6	203.1	205.6	158.6	155.9	153.1	150.5	148.2	146.3	144.5		
20,0°	195.1	197.8	199.4	199.1	199.8	202.0	161.7	159.2	156.4	153.9	151.3	148.9	146.6		
22,5°	192.1	194.9	196.8	197.2	198.2	200.5	166.8	164.9	162.7	159.7	156.7	153.4	150.1		
25,0°	192.1	195.5	198.7	199.8	200.6	204.2	174.1	171.6	170.1	166.6	162.7	158.2	153.9		
27,5°	193.7	197.8	203.2	205.9	206.1	212.2	182.4	180.0	177.2	174.5	169.6	164.3	158.6		
30,0°	196.7	200.2	207.1	210.2	209.8	218.5	190.8	188.8	185.8	181.5	177.2	170.1	163.2		
32,5°	200.4	202.9	207.4	209.5	209.7	221.2	199.9	198.2	195.3	190.2	183.6	177.8	169.1		
35,0°	202.9	205.8	207.0	209.1	210.0	224.4	209.9	208.8	206.0	200.2	191.7	183.5	177.5		
37,5°	205.5	207.9	208.8	209.9	211.5	226.8	219.1	219.1	216.5	210.2	201.5	192.0	184.1		
40,0°	207.0	211.0	212.6	213.1	218.3	225.8	228.5	229.5	227.3	220.6	211.3	201.3	193.2		
42,5°	207.4	214.2	217.3	222.1	232.8	235.9	237.6	239.8	238.5	230.8	220.7	210.2	201.3		
45,0°	207.1	218.9	229.5	232.8	249.5	253.7	244.8	249.2	248.9	240.5	228.6	216.9	207.7		
47,5°	209.7	228.2	240.7	241.1	256.8	261.3	251.4	257.6	256.9	247.5	234.2	221.7	212.8		
50,0°	215.2	234.1	242.8	237.7	238.9	238.1	257.2	265.4	263.4	251.7	236.4	223.8	214.8		
52,5°	220.9	235.8	236.6	229.8	233.4	232.8	261.7	271.8	267.6	251.8	235.1	223.1	213.7		
55,0°	226.4	234.2	231.6	229.7	237.8	239.0	266.0	276.0	268.4	248.8	227.1	214.3	207.5		
57,5°	233.5	241.3	246.5	256.4	286.3	304.6	270.1	278.4	265.8	240.1	211.7	198.4	196.3		
60,0°	265.0	308.4	442.0	608.3	691.7	713.1	273.1	279.1	259.9	230.0	199.5	186.2	181.8		
62,5°	512.4	747.5	889.7	921.7	916.4	909.5	280.5	284.4	253.3	217.1	186.3	169.9	148.4		
65,0°	991.5	1104.2	1116.7	939.4	778.8	719.2	267.7	272.8	247.1	203.7	169.4	138.4	114.7		
67,5°	1590.2	958.6	558.5	344.6	285.8	272.4	258.6	256.3	223.6	182.9	139.3	102.3	81.7		
70,0°	537.1	294.1	225.4	185.0	161.2	154.1	255.2	236.8	199.7	151.2	100.0	71.6	52.6		
72,5°	165.8	135.8	113.3	93.1	80.6	77.3	268.9	225.8	168.3	106.4	67.9	42.9	32.0		
75,0°	81.3	69.7	58.1	47.9	41.3	39.0	209.6	194.3	131.3	68.9	39.4	24.4	21.9		
77,5°	41.1	35.1	29.8	23.1	20.4	19.4	113.2	119.8	81.1	38.2	18.0	12.0	10.3		
80,0°	19.4	18.5	14.4	12.2	10.1	9.5	35.9	42.5	34.6	17.3	8.0	5.5	5.5		
82,5°	9.4	8.3	6.4	5.4	4.6	4.3	5.9	6.3	6.7	4.6	3.1	2.9	2.8		
85,0°	2.8	2.5	2.1	1.7	1.6	1.6	1.2	1.2	1.3	1.3	1.2	1.2	1.3		
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.8	0.8	0.8	0.8	0.8		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family Streetlight 31 midi toolless		Order number: 5XH714AT08MA EAN: 4069025514080										LP number 59800_4030	
Table of values for luminous intensities										Maximum luminous intensity		sITeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	0.2	0.2
2,5°	145.4	145.3	145.0	144.9	144.8	144.7	144.6	144.6	144.7	144.9	144.9	1.8	2.0
5,0°	142.7	142.2	141.7	141.3	140.9	140.6	140.4	140.3	140.3	140.3	140.3	3.6	5.6
7,5°	140.6	139.6	138.8	138.1	137.6	137.0	136.8	136.6	136.6	136.5	136.5	5.4	10.9
10,0°	139.1	138.0	136.9	136.1	135.2	134.5	133.9	133.6	133.7	133.7	133.6	7.3	18.2
12,5°	138.7	137.3	136.1	134.9	133.7	132.7	131.9	131.5	131.4	131.8	131.8	9.3	27.5
15,0°	140.0	138.1	136.2	134.7	133.4	132.2	131.4	131.0	130.7	130.7	130.7	11.4	38.8
17,5°	142.5	140.2	138.4	136.2	134.2	132.2	130.6	129.3	128.7	128.6	128.8	13.4	52.3
20,0°	144.2	141.9	140.0	137.4	135.3	133.0	131.0	129.5	128.6	128.3	128.7	15.4	67.7
22,5°	147.1	144.0	141.1	138.8	137.2	134.9	132.7	130.9	129.7	129.2	129.8	17.5	85.2
25,0°	150.2	146.7	143.4	140.7	138.4	136.9	134.9	132.9	131.3	130.7	131.5	19.8	105.0
27,5°	153.7	149.7	146.2	143.2	140.7	139.1	137.1	135.3	133.7	132.7	133.4	22.2	127.1
30,0°	157.3	153.1	149.3	146.2	143.5	141.8	140.3	138.2	136.7	135.6	136.0	24.6	151.7
32,5°	162.1	157.6	154.1	150.9	147.7	146.0	144.9	142.3	140.4	139.2	139.3	27.1	178.9
35,0°	169.0	164.0	160.6	157.1	153.9	151.5	149.5	147.5	145.4	144.5	145.2	29.8	208.7
37,5°	178.8	171.9	168.3	164.4	160.7	157.8	155.9	154.3	152.1	150.8	152.0	32.6	241.2
40,0°	185.7	181.5	176.5	172.6	168.7	165.3	163.3	161.4	159.8	158.8	159.4	35.4	276.7
42,5°	193.6	188.5	185.1	180.2	176.1	172.4	170.4	169.0	167.7	167.1	167.0	38.3	315.0
45,0°	200.4	194.5	191.9	186.5	182.4	178.5	176.3	175.0	173.8	173.2	172.7	41.1	356.1
47,5°	205.3	199.5	194.5	190.9	185.5	182.2	179.7	176.1	172.4	170.3	168.9	43.6	399.7
50,0°	208.4	201.3	194.6	191.6	184.2	173.6	162.9	154.0	148.2	146.2	145.4	44.8	444.5
52,5°	206.4	199.4	191.9	178.7	162.3	145.0	134.4	128.6	126.0	125.2	126.9	45.3	489.8
55,0°	200.5	191.0	170.8	149.3	134.4	119.4	111.2	108.0	106.6	106.9	113.6	45.5	535.3
57,5°	187.9	163.3	140.7	121.7	106.4	96.3	91.1	91.9	92.2	90.7	95.9	46.2	581.5
60,0°	156.2	131.6	111.6	93.4	83.4	80.7	81.0	81.4	81.8	83.6	91.0	54.7	636.2
62,5°	122.4	100.3	81.4	71.0	71.2	74.7	75.5	76.2	75.9	78.9	84.8	71.9	708.1
65,0°	91.4	71.9	62.2	62.1	67.3	71.5	71.2	69.9	68.0	76.5	82.1	98.8	806.9
67,5°	61.6	55.3	53.3	60.0	66.6	67.6	64.6	59.9	41.5	39.8	50.4	92.9	899.8
70,0°	41.4	43.0	52.6	58.9	58.4	53.9	42.9	19.0	17.9	28.3	40.2	49.4	949.3
72,5°	31.6	38.8	44.5	44.5	38.5	31.6	16.1	14.2	13.4	20.8	26.1	24.8	974.0
75,0°	25.4	29.3	31.2	27.4	22.3	15.1	12.2	10.5	9.6	12.1	13.2	14.0	988.0
77,5°	11.8	16.6	15.7	12.8	11.4	9.8	8.8	7.0	5.7	5.6	6.5	7.1	995.1
80,0°	5.8	6.3	6.9	6.8	6.3	5.8	5.2	4.0	2.9	1.7	1.4	3.1	998.2
82,5°	3.0	3.3	3.5	3.5	3.8	3.3	2.9	2.2	1.7	1.3	1.1	1.2	999.4
85,0°	1.3	1.4	1.5	1.5	1.5	1.5	1.4	1.3	1.1	1.0	1.0	0.4	999.8
87,5°	0.8	0.8	0.9	0.9	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH714AT08MA EAN: 4069025514080	LP number 59800_4030
Dimming levels table		environmental temperature: 25°C
		sITeco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	20270	142.8	158.8	150.8
95	237	251	19239	132.6	147.2	139.9
90	221	249	18225	123.0	136.5	129.8
85	206	246	17238	114.2	126.6	120.4
80	191	244	16213	105.6	116.9	111.2
75	177	241	15225	97.5	107.9	102.7
70	163	238	14209	89.6	99.0	94.3
65	149	234	13161	81.7	90.3	86.0
60	136	231	12162	74.4	82.1	78.2
55	123	227	11134	67.1	74.2	70.6
50	111	224	10161	60.6	66.8	63.7
45	98	219	9080	53.4	59.0	56.2
40	87	215	8146	47.3	52.3	49.8
35	75	209	7102	40.9	45.0	43.0
30	63	203	6037	34.5	37.8	36.2
25	52	196	5040	28.7	31.5	30.1
20	41	187	4025	23.0	25.1	24.0
15	31	177	3085	17.9	19.5	18.7
11	21	163	2132	12.8	13.9	13.4

Dimming levels table			environmental temperature: 5°C			
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	20900	144.5	160.5	152.5
95	238	252	19864	134.7	149.5	142.1
90	222	249	18790	125.1	138.8	132.0
85	207	247	17752	116.2	128.8	122.5
80	193	244	16751	108.0	119.7	113.8
75	178	241	15647	99.3	109.9	104.6
70	165	238	14667	91.8	101.5	96.6
65	151	235	13585	83.9	92.6	88.2
60	138	232	12553	76.5	84.5	80.5
55	125	228	11499	69.2	76.3	72.8
50	112	224	10418	61.9	68.3	65.1
45	100	220	9398	55.3	60.9	58.1
40	88	215	8357	48.6	53.6	51.1
35	76	210	7292	42.0	46.3	44.2
30	65	204	6300	36.1	39.6	37.8
25	53	197	5198	29.7	32.5	31.1
20	42	188	4167	23.9	26.1	25.0
15	31	177	3121	18.2	19.8	19.0
10	21	163	2155	13.0	14.1	13.6

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH714AT08MA EAN: 4069025514080	LP number 59800_4030
Dimming levels table		environmental temperature: 15°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	20610	143.6	159.6	151.6
95	238	252	19606	133.9	148.7	141.3
90	222	249	18562	124.3	137.9	131.1
85	207	247	17549	115.5	128.1	121.8
80	192	244	16499	106.8	118.2	112.5
75	178	241	15489	98.7	109.3	104.0
70	164	238	14453	90.7	100.3	95.5
65	150	235	13386	82.8	91.4	87.1
60	137	231	12370	75.4	83.3	79.4
55	124	228	11327	68.2	75.2	71.7
50	112	224	10342	61.5	67.9	64.7
45	99	219	9248	54.3	59.9	57.1
40	87	215	8216	47.7	52.7	50.2
35	76	210	7248	41.7	45.9	43.8
30	64	204	6173	35.2	38.8	37.0
25	53	197	5169	29.4	32.2	30.8
20	42	188	4146	23.7	25.9	24.8
15	31	177	3106	18.1	19.7	18.9
10	21	163	2145	12.9	14.0	13.4

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH714AT08MA EAN: 4069025514080	LP number 59800_4030
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	20270.0	142.8
5.0	20900.0	144.5
15.0	20610.0	143.6