

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE18CN49XG
EAN: 4058352929285

LP number
58691_218



Version cover frosted, medium distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-Multilumen CLOi
Rated values Net luminous flux = 9040 lm
Power consumption = 49.3 W
Luminous efficacy = 183.4 lm/W

serial
documentation
14.11.2025


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 890 cd/klm

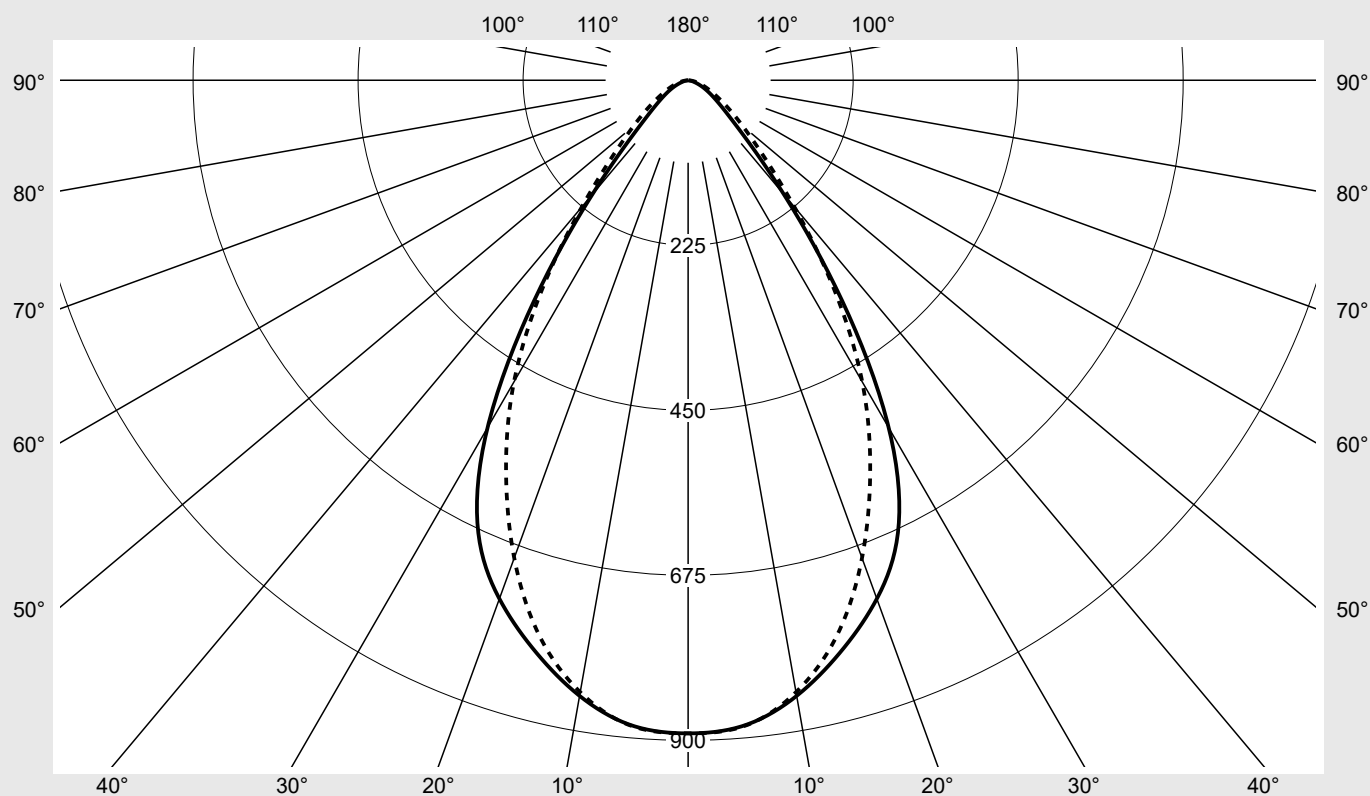

Classifications

DIN 5040 A 6 0
CIE N1=83 N2=96 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE18CN49XG EAN: 4058352929285	LP number 58691_218
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	890.5	890.5	890.5	890.5	890.5	890.5	890.5	5.3	5.3
5°	883.0	882.3	875.7	876.1	880.2	881.2	883.8	42.0	47.4
10°	852.3	852.7	846.0	846.4	847.1	846.1	847.2	80.7	128.1
15°	806.0	807.1	800.6	798.1	793.1	786.0	783.9	113.0	241.1
20°	752.4	753.8	745.8	735.1	719.0	700.4	693.3	136.8	377.8
25°	677.7	678.7	666.2	642.3	616.2	594.6	587.5	147.9	525.7
30°	547.1	547.0	530.5	500.0	481.5	475.9	474.8	139.1	664.9
35°	364.4	363.5	349.1	327.1	328.9	340.7	345.9	108.2	773.0
40°	203.2	202.2	193.4	185.6	201.9	218.9	225.4	71.4	844.5
45°	108.8	108.0	102.7	103.7	123.9	139.5	144.1	45.5	890.0
50°	66.7	66.1	62.8	66.6	83.9	94.8	97.2	31.9	921.9
55°	45.6	45.3	45.3	49.0	60.9	67.0	67.8	24.3	946.1
60°	31.9	31.8	34.1	38.0	45.2	47.1	47.1	18.6	964.8
65°	21.6	21.7	24.8	28.3	33.6	33.2	32.9	14.0	978.8
70°	13.4	13.7	16.2	19.9	24.5	23.3	22.8	9.9	988.7
75°	7.5	7.7	9.1	12.7	16.1	15.5	14.8	6.4	995.1
80°	4.0	4.1	4.6	6.4	8.9	8.9	8.1	3.5	998.6
85°	1.9	1.8	2.0	2.6	3.4	3.5	3.0	1.4	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed		Order number: 51TE18CN49XG EAN: 4058352929285							LP number 58691_218		
UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.6	19.9	19.0	20.2	20.5	19.5	20.8	19.9	21.1	21.5
	3H	18.8	19.9	19.2	20.3	20.6	20.0	21.2	20.4	21.5	21.9
	4H	18.8	19.9	19.2	20.2	20.6	20.2	21.3	20.6	21.6	22.0
	6H	18.8	19.8	19.2	20.2	20.5	20.3	21.3	20.8	21.7	22.1
	8H	18.9	19.7	19.3	20.1	20.5	20.5	21.3	20.9	21.7	22.1
	12H	18.9	19.7	19.3	20.0	20.5	20.5	21.2	20.9	21.6	22.0
4H	2H	18.8	19.8	19.2	20.2	20.6	19.6	20.7	20.0	21.0	21.4
	3H	19.1	19.9	19.5	20.3	20.7	20.3	21.2	20.7	21.5	22.0
	4H	19.1	19.9	19.6	20.3	20.8	20.6	21.4	21.0	21.8	22.2
	6H	19.1	19.8	19.6	20.2	20.7	20.8	21.5	21.2	21.9	22.4
	8H	19.1	19.7	19.6	20.2	20.7	20.9	21.4	21.3	21.9	22.4
	12H	19.2	19.7	19.7	20.1	20.6	20.9	21.4	21.4	21.9	22.4
8H	4H	19.2	19.8	19.7	20.3	20.7	20.6	21.2	21.1	21.6	22.1
	6H	19.3	19.7	19.8	20.2	20.7	20.9	21.4	21.4	21.8	22.4
	8H	19.3	19.7	19.8	20.2	20.7	21.0	21.4	21.5	21.9	22.4
	12H	19.3	19.6	19.8	20.1	20.7	21.1	21.4	21.6	21.9	22.5
12H	4H	19.3	19.7	19.7	20.2	20.7	20.6	21.1	21.1	21.6	22.1
	6H	19.3	19.7	19.8	20.2	20.7	20.9	21.3	21.4	21.8	22.3
	8H	19.3	19.6	19.8	20.2	20.7	21.0	21.3	21.5	21.8	22.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	15991.5	15875.0	15085.0	15231.8	18210.7	20494.6	21181.1
50°	10789.6	10685.2	10145.6	10770.2	13568.1	15324.3	15720.5
55°	8258.5	8207.9	8212.4	8870.4	11024.6	12134.2	12281.1
60°	6635.6	6602.7	7096.7	7903.9	9385.8	9786.9	9777.7
65°	5315.2	5336.8	6099.0	6966.4	8256.0	8152.0	8080.4
70°	4061.3	4168.5	4930.8	6041.2	7439.9	7091.8	6921.3
75°	3010.2	3096.1	3657.8	5081.4	6470.9	6236.4	5942.6
80°	2394.1	2433.0	2762.1	3838.0	5346.5	5302.3	4873.2
85°	2221.1	2199.6	2378.5	3145.1	4066.6	4200.2	3565.9

Photometric test report

Family
Licross® 11 Recessed

Order number: **51TE18CN49XG**
EAN: **4058352929285**

LP number
58691_218

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

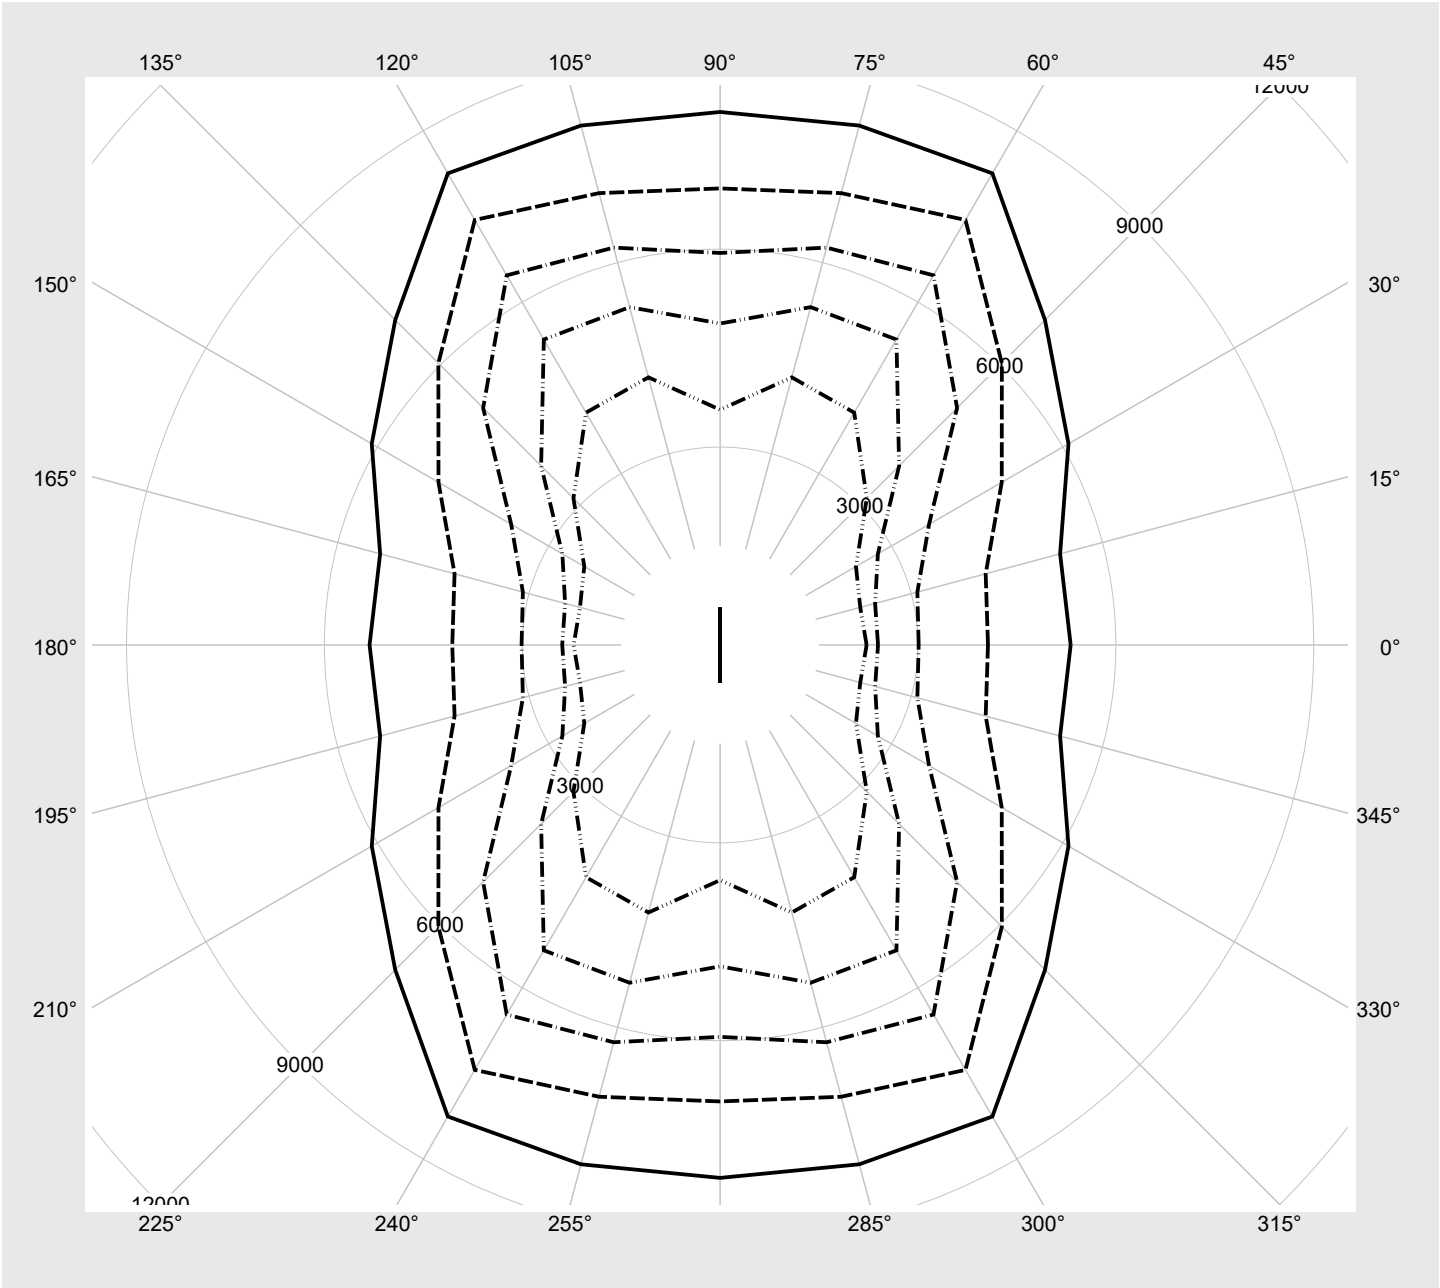

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE18CN49XG EAN: 4058352929285	LP number 58691_218
Multilumen Table	environmental temperature: 25°C	sITeco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	9040	49.3	52.0	50.6
2	A	C	F	8520	46.2	48.4	47.3
3	A	D	E	8000	43.1	45.3	44.2
4	A	D	F	7470	40.0	42.2	41.1
5	B	C	E	7010	37.4	39.6	38.5
6	B	C	F	6480	34.3	36.5	35.4
7	B	D	E	6010	31.8	33.5	32.6
8	B	D	F	5540	29.2	30.9	30.0