

**Order No.:** 53BD81271V6080 | **GTIN (EAN):** 4058352434451

**Product description:** DUS31MO,LI,wd,7820lm865,0/1,wh,5su



DUS® 31 MO, luminaire insert, of sheet steel, coil coated, white, length: 1.535mm, width: 81mm, height: 90mm, 5x system unit, system units: 307mm, LED rated luminous flux: 7.820lm, light colour: 865, control gear: ON/OFF, control gear: ECG, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 51W, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -35..+35°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	1.8
GTIN (EAN):	4058352434451



Order No.: 53BD81271V6080 | GTIN (EAN): 4058352434451

Detailed technical description: DUS31MO,LI,wd,7820lm865,0/1,wh,5su



#### Key data

- Product type: luminaire insert
- Product name: DUS® 31 MO
- Order No.: 53BD81271V6080

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 25$
- UGR viewing direction along lateral luminaire axis:  $\leq 25$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 7820lm
- Luminous efficacy: 154lm/W
- Colour temperature: 6500K
- Colour rendering index: CRI > 80
- Light colour: 865
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 51W

#### Operating device:

- Control gear: ECG
- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): -35..+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

#### Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in DUS® mounting rail
- Colour specification: white
- Cover: cover of PMMA

#### Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

#### Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- System units: 5x SE
- Length: 1535mm
- Width: 81mm
- Height: 90mm
- Weight: 1.8kg

#### Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 53BD81271V6080 | GTIN (EAN): 4058352434451

Dimensions: DUS31MO,LI,wd,7820lm865,0/1,wh,5su

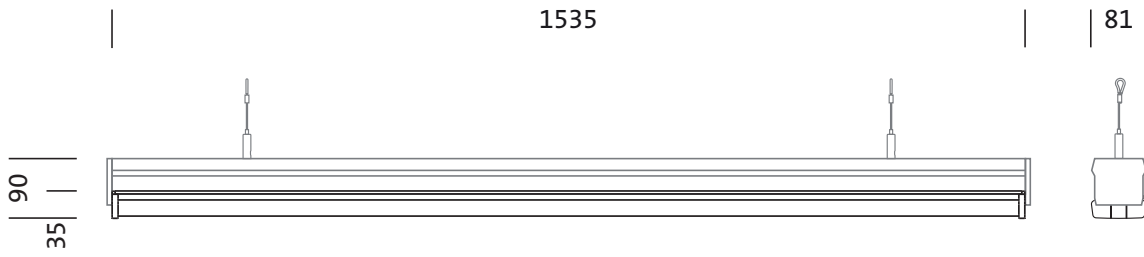

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -


Order No.: 53BD81271V6080 | GTIN (EAN): 4058352434451

Planning data: DUS31MO,LI,wd,7820lm865,0/1,wh,5su

**53BD81271V6080: 1x LED**

4058352434451  
53BD81271V6080

LED 6500 K | CRI ≥ 80  $\phi_{\text{N}} 7820 \text{ lm}$



$\phi_{\downarrow} 92\%$   $\phi_{\uparrow} 8\%$

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	5773	8544
L <sub>70</sub>	7951	11768
L <sub>65</sub>	9884	13189

UGR 24.8 24.8

X 4H Y 8H  $\rho$  70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -