

Order No.: 53BD812C1V4075 | **GTIN (EAN):** 4058352421666


Product description: DUS31MO,LI,wd,7620lm840,MLCi,wh,5su



DUS® 31 MO, luminaire insert, of sheet steel, coil coated, white, length: 1.535mm, width: 81mm, height: 90mm, 5x system unit, system units: 307mm, LED rated luminous flux: 7.620lm, light colour: 840, control gear: ON/OFF Multilumen, CLOi, control gear: ECG Multilumen, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, start of lifetime: 49W, end of service life: 56W, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -35..+30°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	1.8
GTIN (EAN):	4058352421666

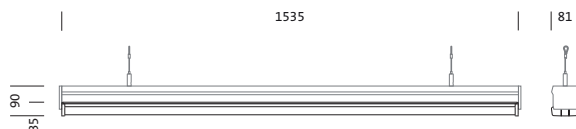

Order No.: 53BD812C1V4075 | **GTIN (EAN):** 4058352421666

Detailed technical description: DUS31MO,LI,wd,7620lm840,MLCi,wh,5su



Key data

- Product type: luminaire insert
- Product name: DUS® 31 MO
- Order No.: 53BD812C1V4075

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 25
- UGR viewing direction along lateral luminaire axis: ≤ 25

Lamps:

- Lamps: with LED
- Rated luminous flux: 7620lm
- Luminous efficacy: 156lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power begin service life: 49
- Rated input power end service life: 56

Operating device:

- Control gear: ECG Multilumen
- Control: ON/OFF Multilumen, CLOi

Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): -35...+30°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in DUS® mounting rail
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220...240V, 50/60Hz, AC

Dimensions, Weight

- System units: 5x SE
- Length: 1535mm
- Width: 81mm
- Height: 90mm
- Weight: 1.8kg

Service life

- Rated service life: 50000h (L100/B50) at AT = 25°C


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 53BD812C1V4075 | **GTIN (EAN):** 4058352421666

Dimensions: DUS31MO,LI,wd,7620lm840,MLCi,wh,5su

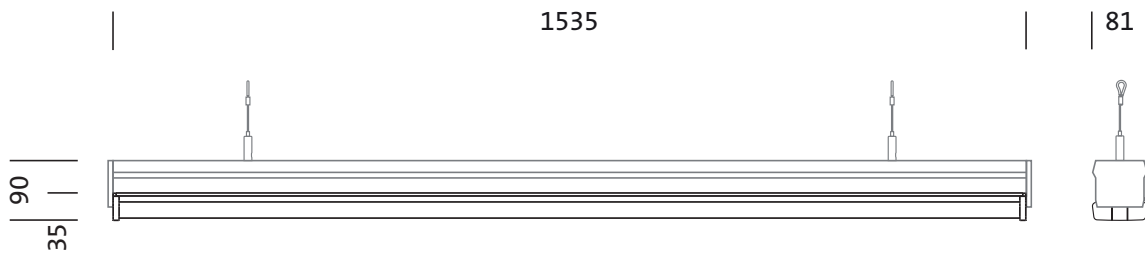

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 53BD812C1V4075 | GTIN (EAN): 4058352421666


Planning data: DUS31MO,LI,wd,7620lm840,MLCi,wh,5su

53BD812C1V4075: 1x LED

4058352421666

53BD812C1V4075

LED 4000 K | CRI ≥ 80 ϕ_N 7620 lm



ϕ_d 92% ϕ_t 8%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	5625	8326
L ₇₀	7748	11467
L ₆₅	9631	12852

UGR 24.7 24.7

X 4H Y 8H ρ 70/50/20 S 0.25H