

Order No.: 51TS12CN475FD | **GTIN (EAN):** 4058352418581

Product description: Lic11Pr,wd,7680lm840,MLCi,IP50,L1500,wh



Licross® 11 Protected MO, luminaire insert, of sheet steel, galvanised, coil coated, white, length: 1.500mm, width: 90mm, height: 101mm, LED rated luminous flux: 7.680lm, light colour: 840, control gear: ON/OFF Multilumen, CLOi, control gear: ECG Multilumen, with plug, 6-pole, with phase selection, mains connection: 220..240V, AC/DC, 0/50..60Hz, start of lifetime: 49W, end of service life: 54W, without changeover relay, for emergency light function, for central battery installations according to DIN EN 60598-2-22, halogen-free wiring, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D if used in an environment without relevant dust loads with corresponding accessories, impact resistance: IK06, permissible ambient temperature for indoor applications: -35..+40°C, standard: EN 60598-2-22, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	2.8
GTIN (EAN):	4058352418581



Order No.: 51TS12CN475FD | **GTIN (EAN):** 4058352418581

Detailed technical description: Lic11Pr,wd,7680lm840,MLCi,IP50,L1500,wh



Key data

- Product type: luminaire insert
- Product name: Licross® 11 Protected MO
- Order No.: 51TS12CN475FD

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 25
- UGR viewing direction along lateral luminaire axis: ≤ 25

Lamps:

- Lamps: with LED
- Rated luminous flux: 7680lm
- Luminous efficacy: 157lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power begin service life: 49
- Rated input power end service life: 54
- Supplement: without changeover relay, for emergency light function, for central battery installations according to DIN EN 60598-2-22, halogen-free wiring

Operating device:

- Control gear: ECG Multilumen
- Control: ON/OFF Multilumen, CLOi

Certificates, Standards

- Protection rating: IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment without relevant dust loads with corresponding accessories
- Temperature range (operation): -35..+40°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05
- Standard: EN 60598-2-22
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- Licross® LED insert: sheet steel, galvanised, coil coated, white
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

Electrical connection

- Connection: plug, 6-pole, with phase selection
- Nominal voltage: 220..240V, 0/50..60Hz, AC/DC

Dimensions, Weight

- Length: 1500mm
- Width: 90mm
- Height: 101mm
- Weight: 2.8kg

Service life

- Rated service life: 70000h (L100/B50) at AT = 25°C

Order No.: 51TS12CN475FD | **GTIN (EAN):** 4058352418581

Dimensions: Lic11Pr,wd,7680lm840,MLCi,IP50,L1500,wh



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -


Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 51TS12CN475FD | GTIN (EAN): 4058352418581

Planning data: Lic11Pr,wd,7680lm840,MLCi,IP50,L1500,wh

51TS12CN475FD: 1x LED;
emergency light operation
rated luminous flux: DC
mode (central or group
accumulator) initial
emergency light level

4058352418581
51TS12CN475FD

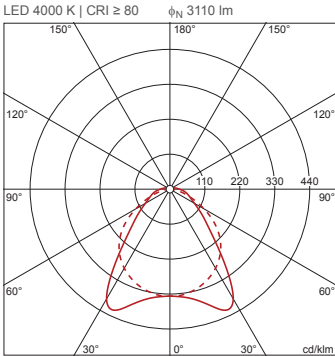


Luminance values (cd/m²)		
	C 0/180	C 90/270
L ₈₀	3851	3392
L ₇₀	3499	4860
L ₆₅	3505	5726

UGR 21.5 21.7
X 4H Y 8H ρ 70/50/20 S 0.25H

51TS12CN475FD: 1x LED;
factory setting AC mode: AC-
mode

4058352418581
51TS12CN475FD

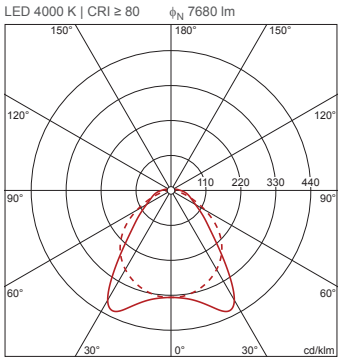

Luminance values (cd/m²)		
	C 0/180	C 90/270
L ₈₀	9509	8376
L ₇₀	8640	12001
L ₆₅	8655	14140

UGR 24.6 24.8
X 4H Y 8H ρ 70/50/20 S 0.25H