

Order No.: 5EA40EHC01 | **GTIN (EAN):** 4058352641323

Product description: SConWi,SmartPlugCelMotHigh



SITECO Connect WirelessSmart Plug Cellular Motion High, sensor, communication: local mesh radio network, EGPRS, NB-IoT NB2, LTE Cat M1, 5G, 4G, 2G, 2.4GHz, D4i type A, control: remote setup and operation, local setting and operation with USB stick, local setting and operation with smartphone app, manual, by time, by timer, by weekday, by AstroDim calendar, by daylight, by movement, via API, with radio clock, optionally via radio push button, sensor technology: 1 PIR movement sensor, daylight sensor, temperature sensor, inclination sensor, GPS, GNSS, GLONASS, GALILEO, The usage fees for remote access via web application and mobile communications (LTE CAT M1 / NB IoT NB2 / EGPRS) are included in the scope of delivery with a term of 5 years. This individually extendable runtime starts when the device QR code is scanned into a system, Smart Interface below, Logarithmic DALI dimming curve preset. Can be switched to linear via software, installation type: screw fastening, installation location: to the luminaire, of plastic, voltage: 24V, voltage type: DC, PIR movement sensor, protection rating (complete): IP66, certification: CE, packaging unit: 1 piece

IP 66 CE

Wt. (kg): 0.1
GTIN (EAN): 4058352641323

Order No.: 5EA40EHC01 | **GTIN (EAN):** 4058352641323

Detailed technical description: SConWi,SmartPlugCelMotHigh



Key data

- System family: SITECO Connect 31 Wireless
- Product type: sensor
- Product name: SITECO Connect Wireless
- Order No.: 5EA40EHC01

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: D4i, Smart Interface below, The usage fees for remote access via web application and mobile communications (LTE CAT M1 / NB IoT NB2 / EGPRS) are included in the scope of delivery with a term of 5 years. This individually extendable runtime starts when the device QR code is scanned into a system, Logarithmic DALI dimming curve preset. Can be switched to linear via software

Certificates, Standards

- Protection rating: IP66
- Temperature range (operation): - 40..+85°C
- Standard: according to Zhaga book 18
- Certification, designation: CE

Material, Colour

- housing: plastic, transparent, colour-backed, transparent
- Colour specification: transparent

Mounting

- Mounting method, mounting location: screw fastening, to the luminaire
- Mounting height: 6..12m

Electrical connection

- Nominal voltage: 24V, DC

Dimensions, Weight

- Weight: 0.1kg


Inputs

PIR movement sensor

- Detection range: max. ø18m

Order No.: 5EA40EHC01 | GTIN (EAN): 4058352641323
Dimensions: SConWi,SmartPlugCelMotHigh

Detection zone "Smart Plug Cellular Motion High"
5EA40EHC01

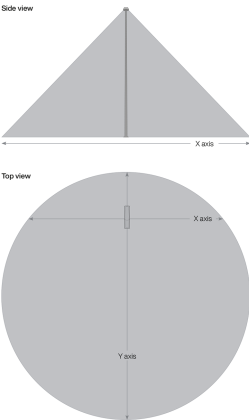

Mounting height	X axis	Y axis
7.0 m	11.9 m	12.4 m
8.0 m	13.6 m	14.2 m
9.0 m	15.3 m	15.9 m
10.0 m	17.0 m	17.7 m