

**Order No.:** 51TL11DV4FXF | **GTIN (EAN):** 4058352448946


**Product description:** Lic11Re,nrrw,15190lm840,DA2,IP40,L2250



Licross® 11 Recessed MO, luminaire insert, of sheet steel, galvanised, coil coated, white, length: 2.250mm, width: 66mm, height: 67mm, LED rated luminous flux: 15.190lm, light colour: 840, control gear: DALI 2, control gear: ECG DALI, with plug, 5-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 90W, halogen-free wiring, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D if used in an environment without relevant dust loads with corresponding accessories, impact resistance: IK06, permissible ambient temperature for indoor applications: -25..+35°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece



|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 2.0           |
| GTIN (EAN): | 4058352448946 |

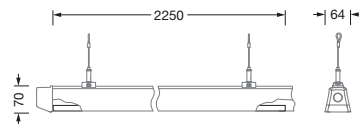

**Order No.:** 51TL11DV4FXF | **GTIN (EAN):** 4058352448946

**Detailed technical description:** Lic11Re,nrrw,15190lm840,DA2,IP40,L2250



#### Key data

- Product type: luminaire insert
- Product name: Licross® 11 Recessed MO
- Order No.: 51TL11DV4FXF

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Cover: cover
- Beam angle: narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 19$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 15190lm
- Luminous efficacy: 170lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 90W
- Supplement: halogen-free wiring

#### Operating device:

- Control gear: ECG DALI
- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment without relevant dust loads with corresponding accessories
- Temperature range (operation): -25..+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, ENEC, VDE, UKCA

#### Material, Colour

- Licross® LED insert: sheet steel, galvanised, coil coated, white
- Colour specification: white
- Cover: cover of PMMA

#### Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

#### Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 2250mm
- Width: 66mm
- Height: 67mm
- Weight: 2.0kg

#### Service life

- Rated service life: 100000h (L80/B50) at AT = ta max, 100000h (L85/B50) at AT = 25°C

Order No.: 51TL11DV4FXF | GTIN (EAN): 4058352448946

Dimensions: Lic11Re,nrrw,15190lm840,DA2,IP40,L2250

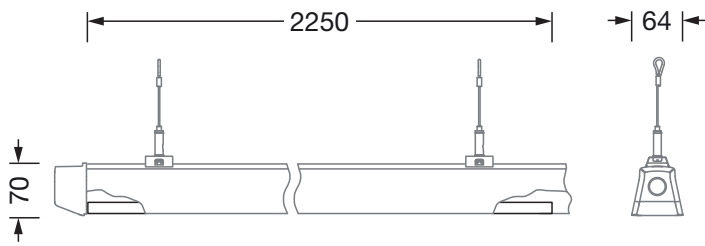

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51TL11DV4FXF | **GTIN (EAN):** 4058352448946


**Planning data:** Lic11Re,nrrw,15190lm840,DA2,IP40,L2250

**51TL11DV4FXF: 1x LED**

4058352448946

51TL11DV4FXF

LED 4000 K | CRI ≥ 80  $\phi_N$  15190 lm



$\phi_d$  100%  $\phi_r$  0%

Luminance values (cd/m<sup>2</sup>)

|                 | C 0/180 | C 90/270 |
|-----------------|---------|----------|
| L <sub>80</sub> | 2649    | 4844     |
| L <sub>70</sub> | 5142    | 7115     |
| L <sub>65</sub> | 6488    | 8057     |

UGR 17.5 18.5

X 4H Y 8H  $\rho$  70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -