

**Order No.:** 5LZ930103 | **GTIN (EAN):** 4058352385937


**Product description:** SCon11,basepackM/P,swpreinstTC3



SITECO Connect 11 base package M/P, 1..40 DALI lines, touch panel PC, central control - connection to lighting or building management, installation type: recessed, installation location: in an electrical distributor, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 230V, voltage type: AC, 1 x DALI-2, software: Lighting Solution, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.9  
GTIN (EAN): 4058352385937

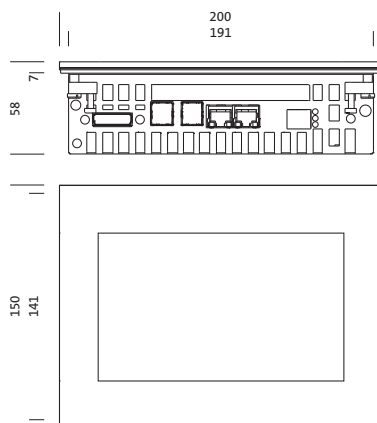

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ930103 | **GTIN (EAN):** 4058352385937

**Detailed technical description:** SCon11,basepackM/P,swpreinstTC3



## Key data

- System family: Siteco Connect 11
- Product type: control unit
- Product name: SITECO Connect 11
- Order No.: 5LZ930103

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP54
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE

#### Material, Colour

- shield: plastic, silver
- Colour specification: silver
- housing: metal, silver
- Colour specification: silver

#### Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

#### Electrical connection

- Nominal voltage: 230V, AC

#### Dimensions, Weight

- Weight: 0.9kg

#### Outputs

##### 1x DALI-2


- Protocol: according to current DALI-2 standard
- Feature: integrated power supply (250mA per DALI line)

#### Software

- Software: Lighting Solution
- Supplement: software pre-installed, TC3 licences (platform 30) TC3 PLC, TC3 PLC HMI, TC3 PLC HMI Web, TC3 XLS

**Order No.:** 5LZ930103 | **GTIN (EAN):** 4058352385937

**Dimensions:** SCon11,basepackM/P,swpreinstTC3

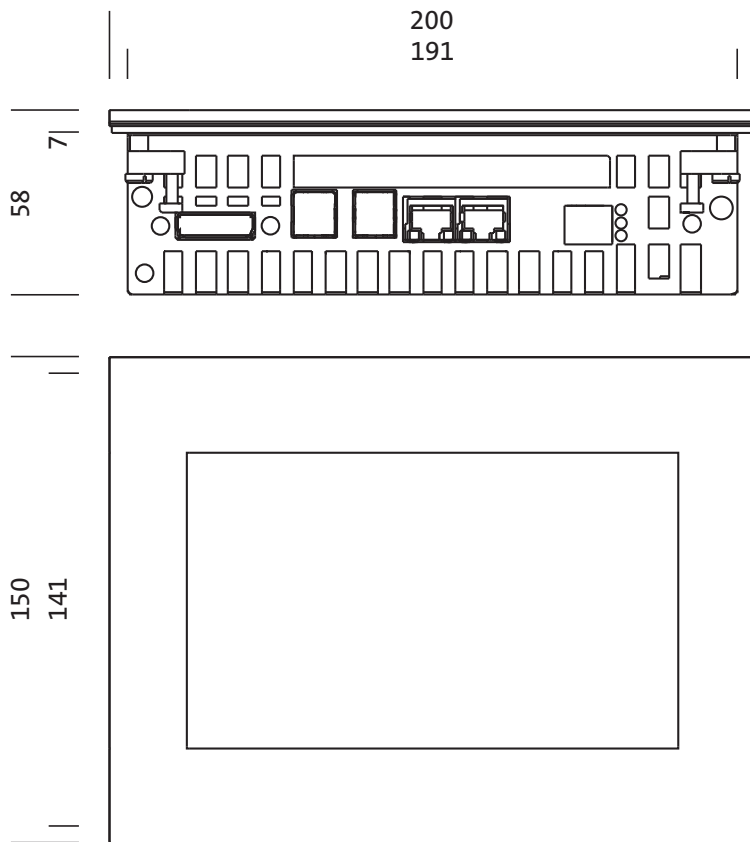

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -