

**Order No.:** 5MT226D04WA | **GTIN (EAN):** 4058352335581


**Product description:** Tar21,LED4080lm840,DA,surf



Taris® 21, office luminaire, primary light control with wallwasher, primary anti-glare with micro louvre, primary optical cover: axial lens, of PMMA, structured, light emission: direct distribution, primary light characteristic: asymmetric, installation type: surface-mounted, LED, rated luminous flux: 4.080lm, luminous efficacy: 141lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 29W, luminaire housing, of plastic, traffic white (RAL 9016), length: 1.230mm, width: 134mm, height: 50mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, protection symbol: F, impact resistance: IK02, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	3.7
GTIN (EAN):	4058352335581

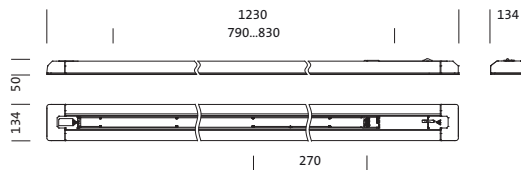

Order No.: 5MT226D04WA | GTIN (EAN): 4058352335581

Detailed technical description: Tar21,LED4080lm840,DA,surf



#### Key data

- Product type: office luminaire
- Product name: Taris® 21
- Order No.: 5MT226D04WA

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: wallwasher
- Cover: axial lens, structured
- Glare reduction: micro louver
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 4080lm
- Luminous efficacy: 141lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 29W

#### Operating device:

- Control gear: ECG DALI
- Control: DALI

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Protection symbol: F
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE

#### Material, Colour

- luminaire housing: plastic, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: axial lens of PMMA

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single arrangement

#### Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230..240V, 50Hz, AC

#### Dimensions, Weight


- Length: 1230mm
- Width: 134mm
- Height: 50mm
- Weight: 3.7kg

#### Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5MT226D04WA | GTIN (EAN): 4058352335581

Dimensions: Tar21,LED4080lm840,DA,surf

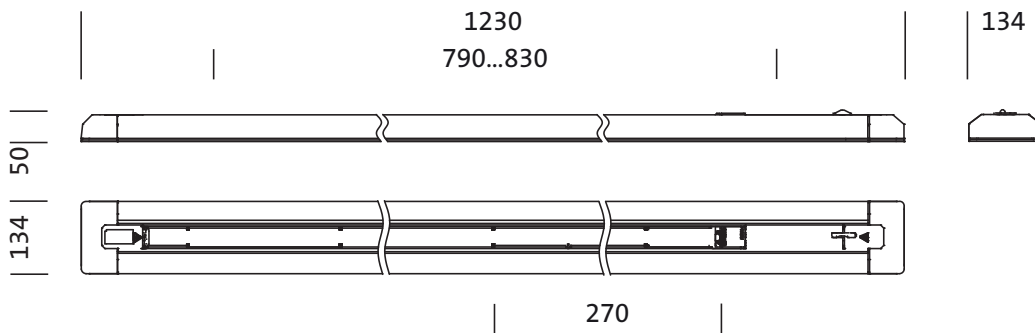

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MT226D04WA | GTIN (EAN): 4058352335581


Planning data: Tar21,LED4080lm840,DA,surf

**5MT226D04WA: 1x LED**

4058352335581

5MT226D04WA

LED 4000 K | CRI ≥ 80  $\phi_N$  4080 lm



$\phi_{\downarrow}$  100%  $\phi_{\uparrow}$  0%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	7053	4945
L <sub>70</sub>	9637	6524
L <sub>65</sub>	11697	7557

UGR 25.4 23.7

X 4H Y 8H  $\rho$  70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -