

Order No.: 5MT126D04WA | GTIN (EAN): 4058352335567


Product description: Tar21,LED4080lm840,DA,rec,M625



Taris® 21, office luminaire, primary light control with wallwasher, primary anti-glare with micro louvre, primary optical cover: axial lens, of PMMA, structured, light emission: direct distribution, primary light characteristic: asymmetric, installation type: recessed, LED, rated luminous flux: 4.080lm, luminous efficacy: 141lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 29W, luminaire housing, of plastic, pure white, module: M625, length: 1.250mm, width: 144mm, height: 76mm, recess depth: 106mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, protection symbol: F, impact resistance: IK02, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, packaging unit: 1 piece

IP 20

Lamps: LED
Wt. (kg): 3.6
GTIN (EAN): 4058352335567

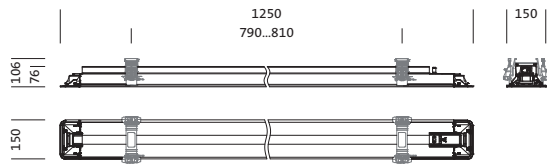

Order No.: 5MT126D04WA | GTIN (EAN): 4058352335567

Detailed technical description: Tar21,LED4080lm840,DA,rec,M625



Key data

- Product type: office luminaire
- Product name: Taris® 21
- Order No.: 5MT126D04WA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: wallwasher
- Cover: axial lens, structured
- Glare reduction: micro louvre
- Symmetry: asymmetric distribution
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 4080lm
- Luminous efficacy: 141lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 29W

Operating device:

- Control gear: ECG DALI
- Control: DALI

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Protection symbol: F
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE

Material, Colour

- luminaire housing: plastic, pure white
- Colour specification: pure white
- Cover: axial lens of PMMA

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230..240V, 50Hz, AC

Dimensions, Weight


- Length: 1250mm
- Width: 144mm
- Height: 76mm
- Recess depth: 106mm
- Weight: 3.6kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5MT126D04WA | GTIN (EAN): 4058352335567

Dimensions: Tar21,LED4080lm840,DA,rec,M625

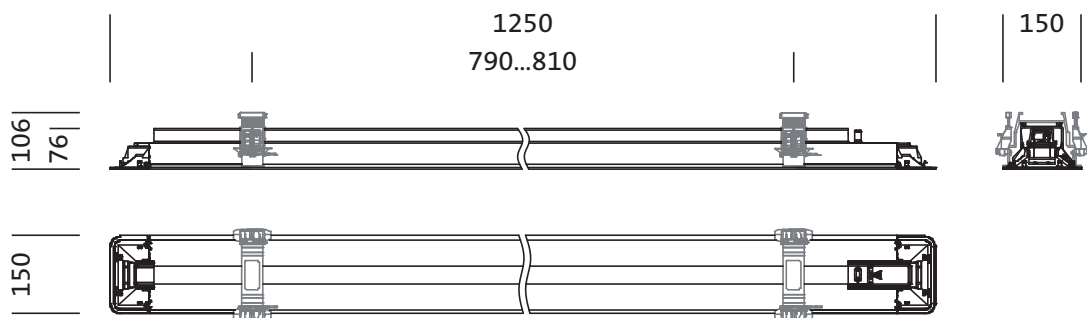

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MT126D04WA | **GTIN (EAN):** 4058352335567


Planning data: Tar21,LED4080lm840,DA,rec,M625

5MT126D04WA: 1x LED

4058352335567

5MT126D04WA

LED 4000 K | CRI \geq 80 ϕ_N 4080 lm



ϕ_v 100% ϕ_r 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L80	7053	4945
L70	9637	6524
L65	11697	7557

UGR 25.4 23.7

X 4H Y 8H ρ 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -