
Order No.: 59HL91001 | **GTIN (EAN):** 4058352323519

Product description: HB11, cvr.pan,glass,f.incr.chem.resist

Highbay 11, cover, primary light control with by luminaire, primary optical cover: cover panel, of glass, installation type: surface-mounted, for increased chemical resistance, with rubber sealing, incl. 8 mounting brackets of stainless steel, to protect lenses from contamination and for easier cleaning, length: 313mm, width: 174mm, for IK08, packaging unit: set of 2

Wt. (kg): 0.6
GTIN (EAN): 4058352323519

Order No.: 59HL91001 | **GTIN (EAN):** 4058352323519

Detailed technical description: HB11, cvr.pan,glass,f.incr.chem.resist

Key data

- Product type: cover
- Product name: Highbay 11
- Order No.: 59HL91001

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: by luminaire
- Cover: cover panel

Certificates, Standards

- Supplement: for IK08

Material, Colour

- Cover: cover panel of glass

Mounting

- Mounting method, mounting location:
surface-mounted, to the luminaire

Dimensions, Weight

- Length: 313mm
- Width: 174mm
- Weight: 0.6kg


Order No.: 59HL91001 | GTIN (EAN): 4058352323519

Planning data: HB11, cvr.pan, glass, f.incr.chem.resist

**51HL62D14DCA +
59HL91001: 1x LED**

4058352348918 + 4058352323519
51HL62D14DCA + 59HL91001

LED 4000 K | CRI ≥ 80 ϕ_N 9560 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1494	2230
L ₇₀	6852	7254
L ₆₅	7559	7225


UGR 19.7 19.5

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HL62D24HCA +
59HL91001: 1x LED**

4058352348932 + 4058352323519
51HL62D24HCA + 59HL91001

LED 4000 K | CRI ≥ 80 ϕ_N 19120 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1494	2230
L ₇₀	6852	7254
L ₆₅	7559	7225


UGR 19.7 19.5

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA2D14FCA +
59HL91001: 1x LED**

4058352322963 + 4058352323519
51HLA2D14FCA + 59HL91001

LED 4000 K | CRI ≥ 80 ϕ_N 13730 lm

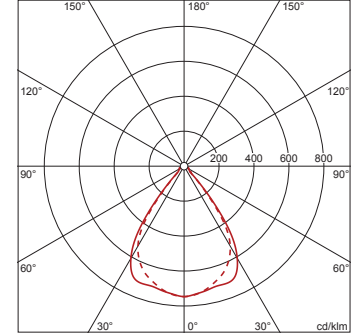

ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	2145	3203
L ₇₀	9841	10418
L ₆₅	10857	10376

UGR 21 20.7

X 4H Y 8H ρ 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722


Issued 15.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59HL91001 | GTIN (EAN): 4058352323519

Planning data: HB11, cvr.pan, glass, f.incr.chem.resist

**51HLA2D24MCA +
59HL91001: 1x LED**

4058352321744 + 4058352323519
51HLA2D24MCA + 59HL91001
LED 4000 K | CRI ≥ 80 ϕ_N 27460 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)


	C 0/180	C 90/270
L ₈₀	2145	3203
L ₇₀	9841	10418
L ₆₅	10857	10376

UGR 21 20.7

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA2D24NCA +
59HL91001: 1x LED**

4058352322987 + 4058352323519
51HLA2D24NCA + 59HL91001
LED 4000 K | CRI ≥ 80 ϕ_N 31620 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	2470	3688
L ₇₀	11331	11996
L ₆₅	12502	11948

UGR 21.5 21.2

X 4H Y 8H ρ 70/50/20 S 0.25H