

Order No.: 51HLA2D24NCA | GTIN (EAN): 4058352322987


Product description: HB11,wd,33150lm840,DA



Highbay 11, LED high bay luminaire, primary light control with lens, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, suspended mounting, for 2x 2x LED, rated luminous flux: 33.150lm, luminous efficacy: 175lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 5-pole, max. 2.5mm², mains connection: 230..240V, AC, 50/60Hz, rated input power: 190W, LED unit, of diecast aluminium, unplated, bead blasted, silver, length: 940mm, width: 500mm, height: 65mm, housing, of diecast aluminium, uncoated, bead blasted, silver, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D, impact resistance: IK08 with glass or PC cover, permissible operating ambient temperature: -35..+45°C, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, packaging unit: 1 piece



Lamps: 2x 2x LED
 Wt. (kg): 8.8
 GTIN (EAN): 4058352322987



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HLA2D24NCA | GTIN (EAN): 4058352322987

Detailed technical description: HB11,wd,33150lm840,DA



Key data

- Product type: LED high bay luminaire
- Product name: Highbay 11
- Order No.: 51HLA2D24NCA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 22
- UGR viewing direction along lateral luminaire axis: ≤ 22

Lamps:

- Lamps: with 2x 2x LED
- Rated luminous flux: 33150lm
- Luminous efficacy: 175lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 190W

Operating device:

- Control gear: ECG DALI
- Control: DALI (2 addresses)

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK08 with glass or PC cover
- Protection symbol: D
- Temperature range (operation): -35..+45°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- LED unit: diecast aluminium, unplated, bead blasted, silver
- Quantity: 4 piece
- Colour specification: silver
- housing: diecast aluminium, uncoated, bead blasted, silver
- Quantity: 1 piece
- Colour specification: silver

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to wire, to the ceiling, to the chain
- Mounting height: 6..20m
- Arrangement: single arrangement
- Supplement: only suitable for indoor use, mounting accessories required, please order separately

Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm²
- Nominal voltage: 230..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 940mm
- Width: 500mm
- Height: 65mm
- Weight: 8.8kg

Service life

- Rated service life: 70000h (L85/B50) at AT = ta max, 100000h (L85/B50) at AT = 25°C

Order No.: 51HLA2D24NCA | GTIN (EAN): 4058352322987

Dimensions: HB11,wd,33150lm840,DA




Order No.: 51HLA2D24NCA | GTIN (EAN): 4058352322987

Planning data: HB11,wd,33150lm840,DA

51HLA2D24NCA: 1x LED

4058352322987
51HLA2D24NCA

LED 4000 K | CRI ≥ 80 ϕ_N 33150 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	3480	5858
L ₇₀	13093	14181
L ₆₅	13489	12881


UGR 21.5 21.4

X 4H Y 8H ρ 70/50/20 S 0.25H

51HLA2D24NCA + 59HL91001: 1x LED

4058352322987 + 4058352323519
51HLA2D24NCA + 59HL91001

LED 4000 K | CRI ≥ 80 ϕ_N 31620 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	2470	3688
L ₇₀	11331	11996
L ₆₅	12502	11948


UGR 21.5 21.2

X 4H Y 8H ρ 70/50/20 S 0.25H

51HLA2D24NCA + 59HL91002: 1x LED

4058352322987 + 4058352341650
51HLA2D24NCA + 59HL91002

LED 4000 K | CRI ≥ 80 ϕ_N 29910 lm

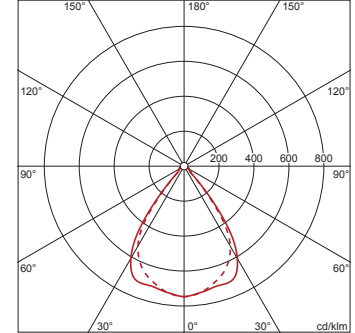

ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	2336	3488
L ₇₀	10719	11347
L ₆₅	11826	11302

UGR 21.3 21

X 4H Y 8H ρ 70/50/20 S 0.25H

Order No.: 51HLA2D24NCA | GTIN (EAN): 4058352322987


Planning data: HB11,wd,33150lm840,DA

**51HLA2D24NCA +
59HL91004: 1x LED**

4058352322987 + 4058352341674

51HLA2D24NCA + 59HL91004

LED 4000 K | CRI ≥ 80 ϕ_N 30180 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	10474	9217
L ₇₀	13142	13782
L ₆₅	17233	16520

UGR 24.2 23.8

X 4H Y 8H ρ 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -