


Order No.: 5LZ930201 | **GTIN (EAN):** 4058352385951


Product description: SCon11,inp.term



SITECO Connect 11 input terminal, central control - connection to lighting or building management, installation type: recessed, installation location: in an electrical distributor, protection rating (complete): IP20, certification: CE, voltage: 24V, voltage type: DC, 1 x K-Bus, 8 x digital switching contact, packaging unit: 1 piece

IP 20 CE

Wt. (kg): 0.1
GTIN (EAN): 4058352385951




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ930201 | **GTIN (EAN):** 4058352385951

Detailed technical description: SCon11,inp.term



Key data

- System family: Siteco Connect 11
- Product type: control unit
- Product name: SITECO Connect 11
- Order No.: 5LZ930201

Certificates, Standards

- Protection rating: IP20
- Temperature range (operation): -25...+60°C
- Certification, designation: CE

Material, Colour

- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

Electrical connection

- Nominal voltage: 24V, DC

Dimensions, Weight

- Length: 100mm
- Width: 12mm
- Height: 68mm
- Weight: 0.1kg

Inputs

1x K-Bus


- Option: system current 15mA

8x digital switching contact

- Option: for connection of on-site push buttons

Order No.: 5LZ930201 | **GTIN (EAN):** 4058352385951

Dimensions: SCon11,inp.term

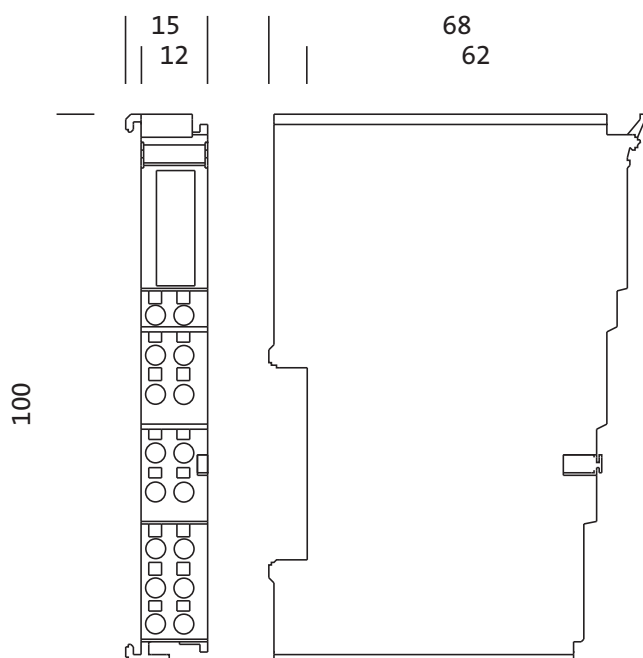

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -