
Order No.: 59HL91003 | **GTIN (EAN):** 4058352341667

Product description: HB11, cvr, PC, prism. cr. bl, w. rubb. seal

Highbay 11, cover, primary light control with by luminaire, primary anti-glare with prismatic cross blades, primary optical cover: cover, of PC, UV-stabilised, installation type: surface-mounted, with rubber sealing, incl. 8 mounting brackets of stainless steel, to protect lenses from contamination and for easier cleaning, length: 313mm, width: 174mm, for IK08, packaging unit: set of 2

Wt. (kg): 0.5
GTIN (EAN): 4058352341667

Order No.: 59HL91003 | **GTIN (EAN):** 4058352341667

Detailed technical description: HB11, cvr, PC, prism. cr. bl, w. rubb. seal

Key data

- Product type: cover
- Product name: Highbay 11
- Order No.: 59HL91003

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: by luminaire
- Cover: cover
- Glare reduction: prismatic cross blades
- Beam angle: ellipsoid distribution

Certificates, Standards

- Supplement: for IK08

Material, Colour

- Cover: cover of PC, UV-stabilised

Mounting

- Mounting method, mounting location: surface-mounted, to the luminaire

Dimensions, Weight


- Length: 313mm
- Width: 174mm
- Weight: 0.5kg

Order No.: 59HL91003 | GTIN (EAN): 4058352341667

Planning data: HB11, cvr, PC, prism. cr. bl, w. rubb. seal

**51HLA1D14FCA +
59HL91003: 1x LED**

4058352321720 + 4058352341667
51HLA1D14FCA + 59HL91003
LED 4000 K | CRI ≥ 80 ϕ_N 12810 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)


	C 0/180	C 90/270
L ₈₀	9066	10613
L ₇₀	7514	16246
L ₆₅	8983	18348

UGR 21.1 25.2

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA1D14GLA +
59HL91003: 1x LED**

4058352361429 + 4058352341667
51HLA1D14GLA + 59HL91003
LED 4000 K | CRI ≥ 80 ϕ_N 14750 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)


	C 0/180	C 90/270
L ₈₀	10439	12220
L ₇₀	8652	18706
L ₆₅	10343	21126

UGR 21.6 25.7

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA1D24MCA +
59HL91003: 1x LED**

4058352322925 + 4058352341667
51HLA1D24MCA + 59HL91003
LED 4000 K | CRI ≥ 80 ϕ_N 25620 lm

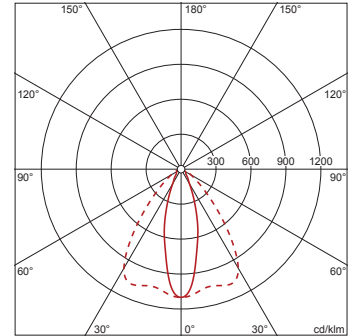

ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	9066	12341
L ₇₀	7514	17645
L ₆₅	8983	19605

UGR 21.2 25.4

X 4H Y 8H ρ 70/50/20 S 0.25H


Order No.: 59HL91003 | GTIN (EAN): 4058352341667

Planning data: HB11, cvr, PC, prism. cr. bl, w. rubb. seal

**51HLA1D24NCA +
59HL91003: 1x LED**

4058352322932 + 4058352341667
51HLA1D24NCA + 59HL91003

LED 4000 K | CRI ≥ 80 ϕ_N 29500 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	10439	14210
L ₇₀	8652	20318
L ₆₅	10343	22574


UGR 21.6 25.9

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA1D24NLA +
59HL91003: 1x LED**

4058352361443 + 4058352341667
51HLA1D24NLA + 59HL91003

LED 4000 K | CRI ≥ 80 ϕ_N 29500 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	10439	14210
L ₇₀	8652	20318
L ₆₅	10343	22574


UGR 21.6 25.9

X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA1D34SCA +
59HL91003: 1x LED**

4058352322949 + 4058352341667
51HLA1D34SCA + 59HL91003

LED 4000 K | CRI ≥ 80 ϕ_N 44250 lm

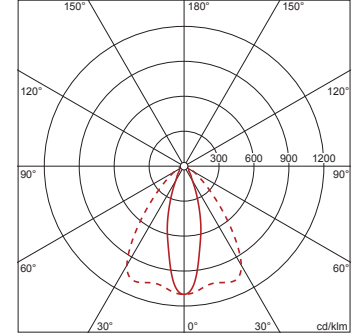

ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	10439	15026
L ₇₀	8652	20918
L ₆₅	10343	23102

UGR 21.7 26

X 4H Y 8H ρ 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 07.07.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -