

Order No.: 5LZ925600 | **GTIN (EAN):** 4058352364048

Product description: SConpresencedet,PIR-sens,rec



SITECO Connectmulti-sensor PS2, master, local control - self-sufficient standalone sensors, dimmable, installation type: recessed, installation location: in the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, VDE, voltage: 220..240V, voltage type: AC, 1 x PIR movement sensor, 4 x push button input, 1 x 1 x light sensor, 1 x DALI, packaging unit: 1 piece



Wt. (kg): 0.1
GTIN (EAN): 4058352364048

Order No.: 5LZ925600 | **GTIN (EAN):** 4058352364048

Detailed technical description: SConpresencedet,PIR-sens,rec



Key data

- System family: SITECO Connect 31 Education
- Product type: presence detector
- Product name: SITECO Connect
- Order No.: 5LZ925600

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Rated input power: 0.5W

Operating device:

- Control: DALI, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE, VDE

Material, Colour

- housing: plastic, pure white (RAL 9010)
- Colour specification: pure white (RAL 9010)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Mounting height: 2.5..10m
- Supplement: only suitable for use in indoor areas

Electrical connection

- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 120mm
- Width: 120mm
- Height: 124mm
- Weight: 0.1kg

Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Detection range: radial min./max. 5x 5m/11x 11m, tangential min./max. 6x 6m/28x 28m
- Detection range: min./max. 4.8x 4.8m/8.2x 8.2m
- Feature: square detection area

4x push button input

- Feature: operating mode: full or semi automatic


Outputs

1x DALI

- Feature: grouping of luminaires in window, corridor or blackboard, integrated DALI power supply 150mA

Order No.: 5LZ925600 | GTIN (EAN): 4058352364048

Dimensions: SConpresencedet,PIR-sens,rec

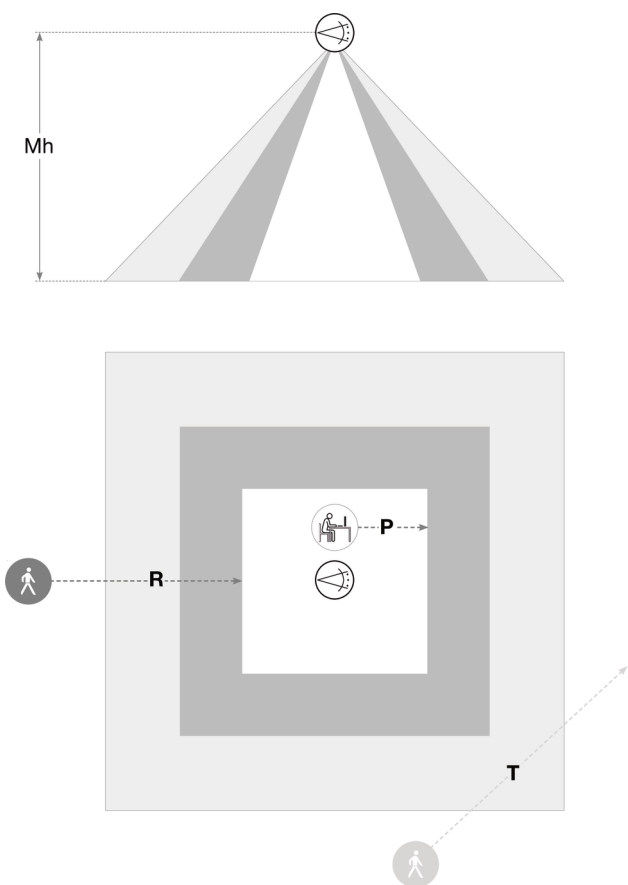

Sensor IR Quattro HD/ PS2

Mh	R	T	P
3m	4x4m - 8x8m	4x4m - 22x22m	4x4m - 8x8m
3,5m	5x5m - 11x11m	6x6m - 28x28m	7,2x7,2m - 8,2x8,2m