ѕітесо

Order No.: 5LZ925601 | GTIN (EAN): 4058352362020 Product description: SConsens,PIR-sens,rec





SITECO Connectmulti-sensor PS2, slave, local control - self-sufficient standalone sensors, central control - connection to lighting or building management, dimmable, installation type: recessed, installation location: in the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, VDE, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI, packaging unit: 1 piece

▲ IP 20 □ (€

Wt. (kg): 0.2 GTIN (EAN): 4058352362020

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

siteco

Order No.: 5LZ925601 | GTIN (EAN): 4058352362020 Detailed technical description: SConsens,PIR-sens,rec



Key data

- System family: Siteco Connect 11, SITECO Connect 21
- Product type: sensor
- Product name: SITECO Connect
- Order No.: 5LZ925601

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation):
 - 0..+40°C
- Certification, designation: CE, VDE

Material, Colour

- housing: plastic, pure white (RAL 9010)
- Colour specification: pure white (RAL 9010)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Mounting height: 2.5..10m
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- Length: 120mm
- Width: 120mm
- Height: 124mm
- Weight: 0.2kg


Inputs

1x PIR movement sensor

- Connection: PIR sensor (passiveinfrared)
- Detection angle: 360°
- Detection range: radial min./max. 5x
 5m/11x 11m, tangential min./max. 6x
 6m/28x 28m
- Detection range: min./max. 4.8x
 4.8m/8.2x 8.2m
- Feature: square detection area



Order No.: 5LZ925601 | GTIN (EAN): 4058352362020 Dimensions: SConsens,PIR-sens,rec

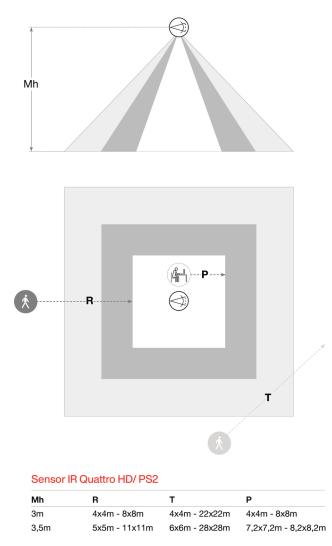

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com