

Order No.: 51HLA1D24NLA | GTIN (EAN): 4058352361443


Product description: HB11,nrrw,32370lm840,DA



Highbay 11, LED high bay luminaire, end cap, primary light control with lens, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: recessed, for 2x 2x LED, rated luminous flux: 32.370lm, luminous efficacy: 171lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with system connector, mains connection: 230..240V, AC, 50/60Hz, rated input power: 190W, LED unit, of diecast aluminium, unplated, bead blasted, silver, for tool-free mounting of luminaire to Licross® trunking rail, length: 1.500mm, width: 500mm, height: 65mm, housing, of diecast aluminium, uncoated, bead blasted, silver, fixing on rail side, of aluminium, anodised, metallic grey, end cap, of PC, grey, protection rating (complete): IP64, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, protection symbol: D, impact resistance: IK08 with glass or PC cover, permissible operating ambient temperature: -35..+45°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, packaging unit: 1 piece

IP 64  

Lamps: 2x 2x LED
 Wt. (kg): 6.5
 GTIN (EAN): 4058352361443

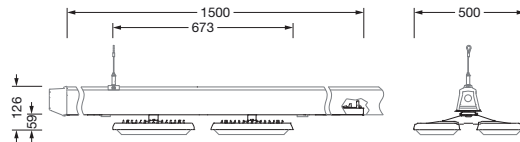

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 27.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HLA1D24NLA | GTIN (EAN): 4058352361443

Detailed technical description: HB11,nrrw,32370lm840,DA



Key data

- Product type: LED high bay luminaire
- Product name: Highbay 11
- Order No.: 51HLA1D24NLA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Beam angle: narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 22
- UGR viewing direction along lateral luminaire axis: ≤ 22

Lamps:

- Lamps: with 2x 2x LED
- Rated luminous flux: 32370lm
- Luminous efficacy: 171lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 190W

Operating device:

- Control gear: ECG DALI
- Control: DALI (2 addresses)

Certificates, Standards

- Protection rating: IP64
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK08 with glass or PC cover
- Protection symbol: D
- Temperature range (operation): -35..+45°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry
- Certification, designation: CE, UKCA

Material, Colour

- LED unit: diecast aluminium, unplated, bead blasted, silver, for tool-free mounting of luminaire to Licross® trunking rail
- Quantity: 4 piece
- Colour specification: silver
- housing: diecast aluminium, uncoated, bead blasted, silver
- Quantity: 1 piece
- Colour specification: silver
- fixing on rail side: aluminium, anodised, metallic grey
- Quantity: 1 piece
- Colour specification: metallic grey
- end cap: PC, grey
- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in the Licross® trunking rail
- Mounting height: 6..20m
- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

Electrical connection

- Connection: system connector
- Nominal voltage: 230..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 1500mm
- Width: 500mm
- Height: 65mm
- Weight: 6.5kg

Service life

- Rated service life: 100000h (L85/B50) at AT = 25°C, 70000h (L85/B50) at AT = 45°C

Order No.: 51HLA1D24NLA | GTIN (EAN): 4058352361443

Dimensions: HB11,nrrw,32370lm840,DA

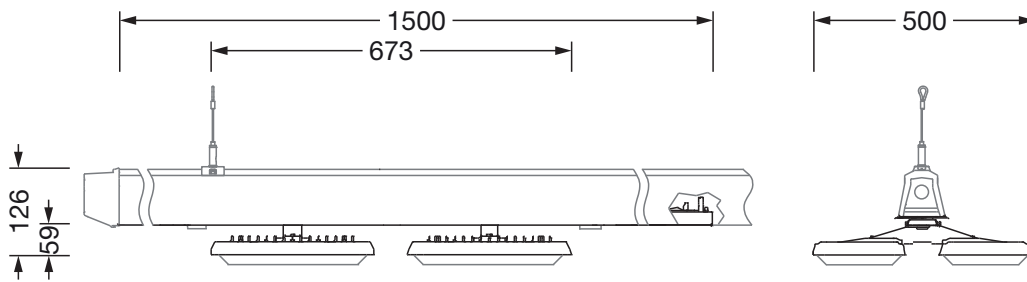

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 27.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HLA1D24NLA | GTIN (EAN): 4058352361443


Planning data: HB11,nrrw,32370lm840,DA

51HLA1D24NLA: 1x LED

4058352361443

51HLA1D24NLA

LED 4000 K | CRI ≥ 80 ϕ_N 32370 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	6251	10572
L ₇₀	13048	9879
L ₆₅	13474	9786

UGR 21 20.6


X 4H Y 8H ρ 70/50/20 S 0.25H

51HLA1D24NLA + 59HL91001: 1x LED

4058352361443 + 4058352323519

51HLA1D24NLA + 59HL91001

LED 4000 K | CRI ≥ 80 ϕ_N 31240 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	5224	8851
L ₇₀	14112	12081
L ₆₅	16326	12720

UGR 21.8 21.4


X 4H Y 8H ρ 70/50/20 S 0.25H

51HLA1D24NLA + 59HL91002: 1x LED

4058352361443 + 4058352341650

51HLA1D24NLA + 59HL91002

LED 4000 K | CRI ≥ 80 ϕ_N 29470 lm

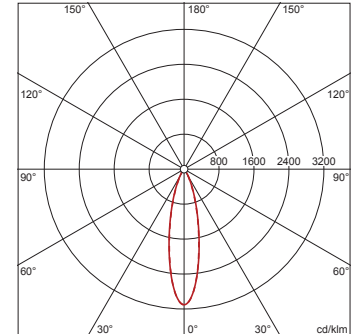

ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	4928	8349
L ₇₀	13312	11396
L ₆₅	15401	11999

UGR 21.6 21.2

X 4H Y 8H ρ 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 27.10.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HLA1D24NLA | GTIN (EAN): 4058352361443


Planning data: HB11,nrrw,32370lm840,DA

**51HLA1D24NLA +
59HL91003: 1x LED**

4058352361443 + 4058352341667

51HLA1D24NLA + 59HL91003

LED 4000 K | CRI ≥ 80 ϕ_N 29500 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	10439	14210
L ₇₀	8652	20318
L ₆₅	10343	22574

UGR 21.6 25.9


X 4H Y 8H ρ 70/50/20 S 0.25H

**51HLA1D24NLA +
59HL91004: 1x LED**

4058352361443 + 4058352341674

51HLA1D24NLA + 59HL91004

LED 4000 K | CRI ≥ 80 ϕ_N 30010 lm



ϕ_{\downarrow} 99% ϕ_{\uparrow} 1%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	10644	7838
L ₇₀	10239	10845
L ₆₅	12351	11207

UGR 22.5 21.8

X 4H Y 8H ρ 70/50/20 S 0.25H