


Order No.: 5NY231650KM08 | **GTIN (EAN):** 4039806381415

Product description: mast,con.rd,steel,powd,DB702S,5m,Ø60



mast, mast, conical round, of steel, powder-coated, Siteco® metallic grey (DB 702S), height: 5.0m, spigot size: 60mm (post-top), planted section: h= 800mm / Ø= 130mm, standard: DIN EN 40, packaging unit: 1 piece

Wt. (kg): 28.5
GTIN (EAN): 4039806381415




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5NY231650KM08 | **GTIN (EAN):** 4039806381415

Detailed technical description: mast,con.rd,steel,powd,DB702S,5m,Ø60



Key data

- Product type: mast
- Product name: mast
- Order No.: 5NY231650KM08

Certificates, Standards

- Standard: DIN EN 40

Material, Colour


- mast: steel, powder-coated, Siteco® metallic grey (DB 702S), conical round
- Colour specification: Siteco® metallic grey (DB 702S)

Dimensions, Weight

- Height: 5.0m
- Weight: 28.5kg
- Mast spigot: spigot size: 60mm
- Planted section: h= 800mm / Ø= 130mm

Order No.: 5NY231650KM08 | **GTIN (EAN):** 4039806381415

Dimensions: mast,con.rd,steel,powd,DB702S,5m,Ø60

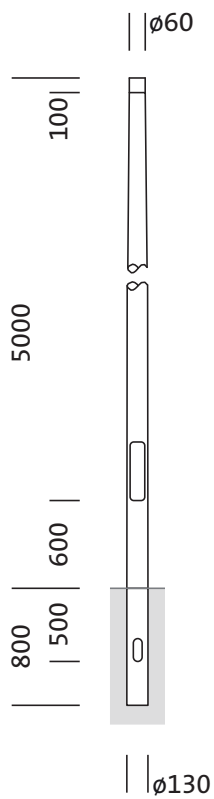

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -