

Order No.: 51DH11B72FF22 | **GTIN (EAN):** 4058352107263

Product description: Lun11mnRdSp,rec,nrrw,1990lm830,0/1,5p,sr





Lunis 11 mini round, Spot, downlight, LED rated luminous flux: 1.990lm, light colour: 830, with terminal, 5-pole, mains connection: 220..230V, AC, 50/60Hz, LED module, luminaire module, of diecast aluminium, coated, silver, diameter: 176mm, clamping range: 1..40mm, recessing ring, round, of PC, traffic white (RAL 9016), protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible ambient temperature for indoor applications: 0..+35°C, packaging unit: 1 piece

IP 20  

Lamps: LED
Wt. (kg): 0.7
GTIN (EAN): 4058352107263

4058352107263
51DH11B72FF22

LED 3000K / CRI ≥ 80 Φ_{H} 1990 lm

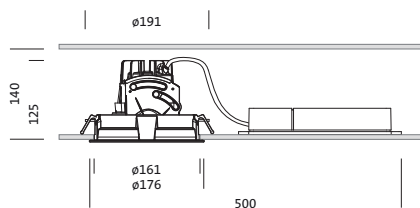

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DH11B72FF22 | **GTIN (EAN):** 4058352107263

Detailed technical description: Lun11mnRdSp,rec,nrrw,1990lm830,0/1,5p,sr



Key data

- Product type: downlight
- Product name: Lunis 11 mini round Spot
- Order No.: 51DH11B72FF22

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Beam angle: narrow distribution
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 1990lm
- Luminous efficacy: 104lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 19W

Operating device:

- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0...+35°C
- Certification, designation: CE

Material, Colour

- LED module: diecast aluminium, coated, silver
- luminaire module: diecast aluminium, coated, silver
- Colour specification: silver
- recessing ring: PC, traffic white (RAL 9016), round
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 162mm
- Clamping range: 1..40mm
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 220..230V, 50/60Hz, AC

Dimensions, Weight


- Diameter: 176mm
- Height: 125mm
- Weight: 0.7kg

Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 51DH11B72FF22 | **GTIN (EAN):** 4058352107263

Dimensions: Lun11mnRdSp,rec,nrrw,1990lm830,0/1,5p,sr

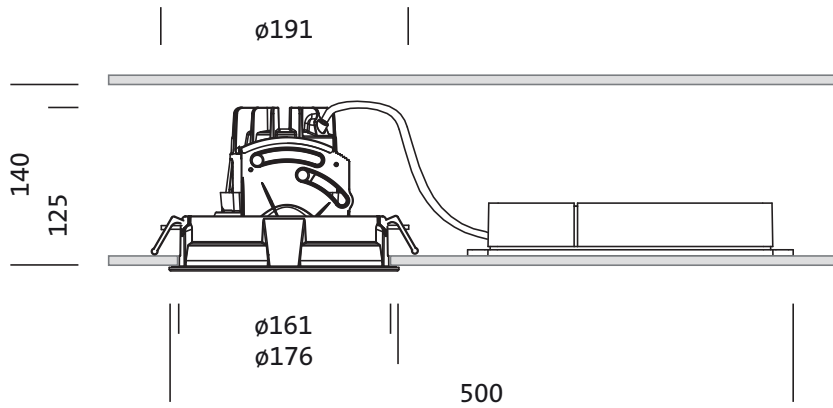

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -


Order No.: 51DH11B72FF22 | **GTIN (EAN):** 4058352107263

Planning data: Lun11mnRdSp,rec,nrrw,1990lm830,0/1,5p,sr

51DH11B72FF22: 1x LED
3000K / CRI ≥ 80

4058352107263
51DH11B72FF22

LED 3000K / CRI ≥ 80

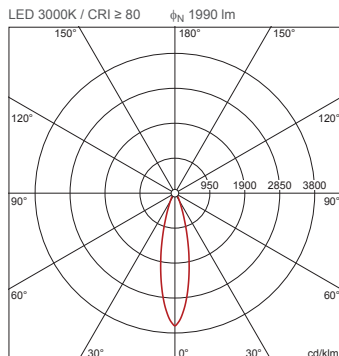

I_{max} 3605 cd/klm at γ 0°

Luminance values (cd/m²)

C 0/180
L80 0
L70 0
L65 0

UGR 13.6 13.6
X 4H Y 8H ρ 70/50/20 S 0.25H

H(m)	ϕ (m)	$E_{max}(lx)$	$E_m(lx)$
2	0.87	1793	1373
3	1.31	797	610
4	1.74	448	343
5	2.18	287	220
6	2.62	199	153

No. of luminaires in room

Reflection factors 70/50/20

Em(k)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m²	0.9	1.1	1.9	2.2	4.7	5.4
30 m²	2.5	2.2	5.1	4.4	13	11
40 m²	2.7	2.6	5.5	5.1	14	13
50 m²	3.6	3.3	7.2	6.5	18	16
75 m²	6.0	5.2	12	10	30	26
100 m²	6.8	6.2	14	12	34	31
500 m²	32	30	64	59	161	148

Maintenance factor 0.8


Rh = Lh

51DH11B72FF22 +
59DL1L0000G0000D0: 1x
LED 3000K / CRI ≥ 80

4058352107263 + 4058352030165

51DH11B72FF22 + 59DL1L0000G0000D0

LED 3000K / CRI ≥ 80

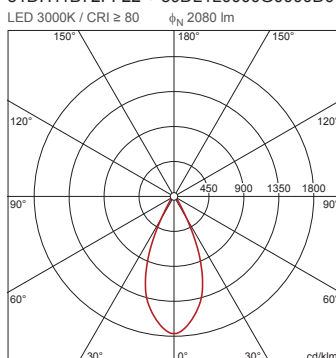

I_{max} 1764 cd/klm at γ 0°

Luminance values (cd/m²)

C 0/180
L80 0
L70 0
L65 0

UGR 13.5 13.5
X 4H Y 8H ρ 70/50/20 S 0.25H

H(m)	ϕ (m)	$E_{max}(lx)$	$E_m(lx)$
2	1.66	918	692
3	2.49	408	308
4	3.31	229	173
5	4.14	147	111
6	4.97	102	77

No. of luminaires in room

Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m²	1.1	1.2	2.2	2.4	5.4	5.9
30 m²	1.8	1.7	3.6	3.3	9.0	8.3
40 m²	2.2	2.3	4.4	4.5	11	11
50 m²	2.8	2.8	5.6	5.6	14	14
75 m²	4.4	4.0	8.7	8.1	22	20
100 m²	5.4	5.5	11	11	27	27
500 m²	26	27	53	53	131	133

Maintenance factor 0.8

Rh = Lh

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -