

Order No.: 51TR1F7 | **GTIN (EAN):** 4058352241998


Product description: Lic,trunk.rail,L3000,7x2.5²,wh



Licross®, trunking rail, of sheet steel, galvanised, coil coated, white, length: 3.000 mm, width: 64 mm, height: 67mm, through-wiring: 7x 2.5mm², protection rating (complete): maximum IP64, depends on used inserts and accessories, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece



Wt. (kg): 4.7
GTIN (EAN): 4058352241998

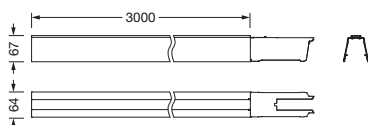

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51TR1F7 | **GTIN (EAN):** 4058352241998

Detailed technical description: Lic,trunk.rail,L3000,7x2.5²,wh



Key data

- Product type: trunking components group (TS)
- Product name: Licross®
- Order No.: 51TR1F7

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: internal wiring halogen-free

Certificates, Standards

- Protection rating: maximum IP64, depends on used inserts and accessories
- Insulation class: insulation class I (protective earthing)
- Supplement: LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, UKCA

Material, Colour

- trunking rail: sheet steel, galvanised, coil coated, white
- Colour specification: white

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection


- Through-wiring: 7x 2.5mm²

Dimensions, Weight

- Length: 3000mm
- Width: 64mm
- Height: 67mm
- Weight: 4.7kg

Order No.: 51TR1F7 | **GTIN (EAN):** 4058352241998

Dimensions: Lic,trunk.rail,L3000,7x2.5²,wh

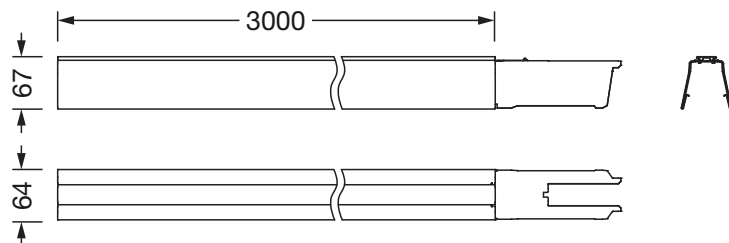

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -