

Order No.: 51DJ11CD1WN21 | **GTIN (EAN):** 4058352132265

Product description: Lun11mcRd,rec,spec,1210lm940,DA,5p,wh




Lunis 11 micro round, downlight, light control with wallwasher, of highly reflective aluminium, highly specular, light emission: direct distribution, LED rated luminous flux: 1.210lm, light colour: 940, with terminal, 5-pole, mains connection: 220..230V, AC, 50/60Hz, LED module, of aluminium, highly specular, white, diameter: 114mm, clamping range: 1..40mm, recessing ring, of plastic, traffic white (RAL 9016), protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible ambient temperature for indoor applications: 0..+35°C, packaging unit: 1 piece


IP 20  

4058352132265
51DJ11CD1WN21

LED 4000K / CRI ≥ 90 Φ_{H} 1210 lm



Lamps: LED
Wt. (kg): 0.5
GTIN (EAN): 4058352132265

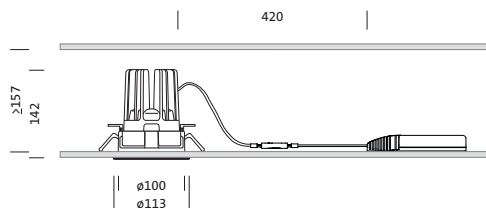

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DJ11CD1WN21 | **GTIN (EAN):** 4058352132265

Detailed technical description: Lun11mcRd,rec,spec,1210lm940,DA,5p,wh



Key data

- Product type: downlight
- Product name: Lunis 11 micro round
- Order No.: 51DJ11CD1WN21

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: wallwasher of highly reflective aluminium, highly specular
- Symmetry: asymmetric distribution
- Light emission: direct distribution

Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 1210lm
- Luminous efficacy: 61lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 90
- Light colour: 940
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 20W

Operating device:

- Control: DALI

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+35°C
- Certification, designation: CE

Material, Colour

- LED module: aluminium, highly specular, white
- Colour specification: white
- recessing ring: plastic, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 100mm
- Clamping range: 1..40mm
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 220..230V, 50/60Hz, AC

Dimensions, Weight


- Diameter: 114mm
- Height: 144mm
- Weight: 0.5kg

Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 51DJ11CD1WN21 | **GTIN (EAN):** 4058352132265

Dimensions: Lun11mcRd,rec,spec,1210lm940,DA,5p,wh

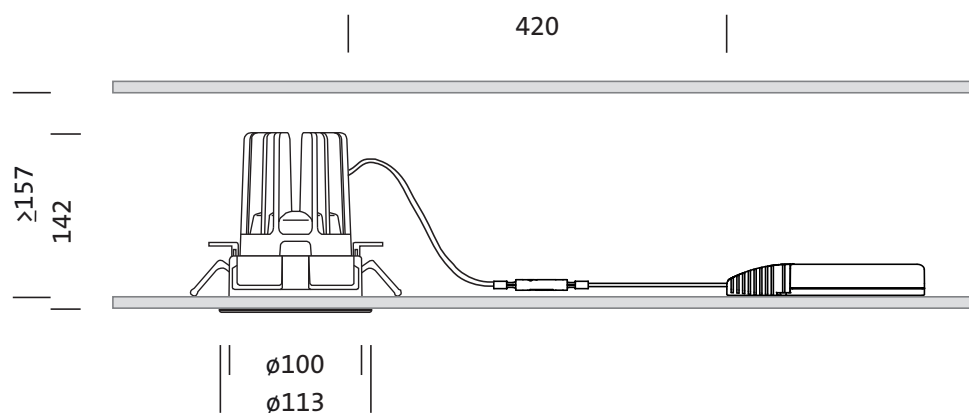

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -


Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 51DJ11CD1WN21 | GTIN (EAN): 4058352132265

Planning data: Lun11mcRd,rec,spec,1210lm940,DA,5p,wh

51DJ11CD1WN21: 1x LED
4000K / CRI ≥ 90

4058352132265
51DJ11CD1WN21

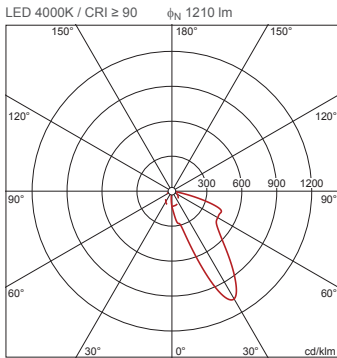

I_{max} 1068 cd/klm at γ 30°

Luminance values (cd/m²)

C 0/180
L₈₀ 196862
L₇₀ 830615
L₆₅ 702886

UGR 43 35
X 4H Y 8H ρ 70/50/20 S 0.25H

No. of luminaires in room
Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m²	2.6	2.8	5.2	5.6	13	14
30 m²	4.3	5.1	8.6	10	21	26
40 m²	4.8	5.7	9.7	11	24	28
50 m²	5.8	6.7	12	13	29	33
75 m²	9.0	10	18	21	45	52
100 m²	11	12	22	24	54	59
500 m²	49	51	98	102	244	254

Maintenance factor 0.8

Rh = Lh