

Order No.: 5MB2512L30840 | **GTIN (EAN):** 4052899488809


Product description: Arktika[®] 21 off-lum, LED, 4000lm840, ECG, dir/ind




Arktika[®] 21, office luminaire, primary anti-glare with honeycomb louvre, of plastic, aluminium vaporised, highly specular, light emission: direct/indirect distribution, primary light characteristic: symmetric, installation type: suspended mounting, LED, rated luminous flux: 4.000lm, luminous efficacy: 130lm/W, light colour: 840, colour temperature: 4000K, control gear: ON/OFF, with terminal, 3-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 31W, housing, of aluminium, powder-coated, traffic white (RAL 9016), 1-length, length: 1.250mm, width: 120mm, height: 8mm, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, packaging unit: 1 piece

IP 20  

4052899488809
5MB2512L30840

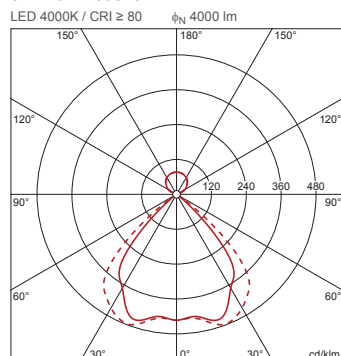

Lamps:	LED
Wt. (kg):	1.8
GTIN (EAN):	4052899488809

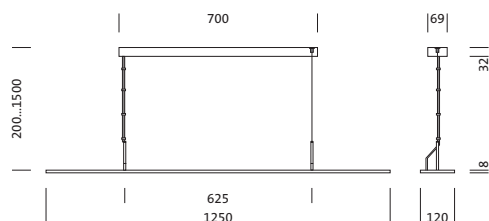

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MB2512L30840 | **GTIN (EAN):** 4052899488809

Detailed technical description: Arkt21 off-lum,LED,4000lm840,ECG,dir/ind



Key data

- Product type: office luminaire
- Product name: Arktika® 21
- Order No.: 5MB2512L30840

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Glare reduction: honeycomb louvre of plastic, aluminium vaporised, highly specular
- Beam angle: wide distribution, 95°
- Symmetry: symmetric
- Light emission: direct/indirect distribution, 75:25
- UGR viewing direction along longitudinal luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 4000lm
- Luminous efficacy: 130lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 31W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Certification, designation: CE

Material, Colour

- housing: aluminium, powder-coated, traffic white (RAL 9016), 1-length
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: suspended mounting, to the wire suspension, to the ceiling
- Recommended suspension height: 0.2..1.5m

Electrical connection

- Connection: terminal, 3-pole
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 1250mm
- Width: 120mm
- Height: 8mm
- Weight: 1.8kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MB2512L30840 | **GTIN (EAN):** 4052899488809

Dimensions: Arkt21 off-lum,LED,4000lm840,ECG,dir/ind

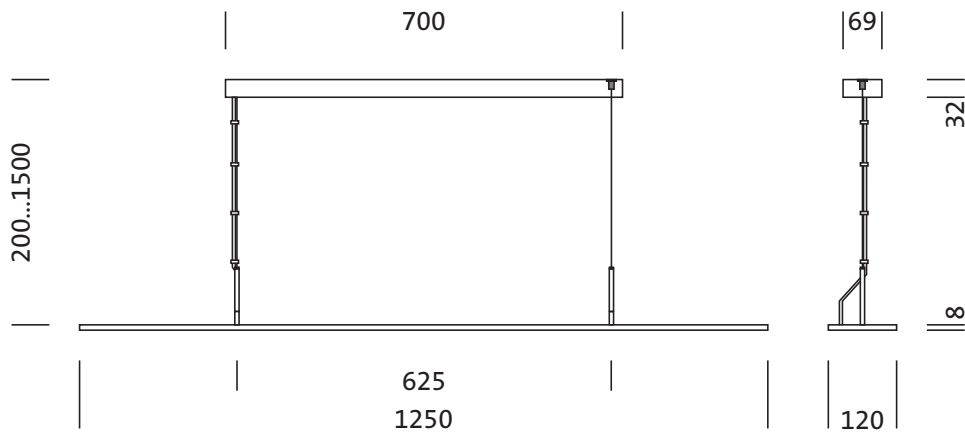

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MB2512L30840 | GTIN (EAN): 4052899488809

Planning data: Arkt21off-lum,LED,4000lm840,ECG,dir/ind


5MB2512L30840: 1x LED
4000K / CRI ≥ 80

4052899488809

5MB2512L30840

LED 4000K / CRI ≥ 80

Φ_N 4000 lm



Φ_d 79% Φ_t 21%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	197	296
L ₇₀	266	269
L ₆₅	330	308

UGR 18.1 18.7

X 4H Y 8H ρ 70/50/20 S 0.25H

No. of luminaires in room

Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.7	0.7	1.3	1.5	3.3	3.7
30 m ²	1.1	1.2	2.2	2.4	5.5	6.0
40 m ²	1.4	1.5	2.8	3.0	6.9	7.6
50 m ²	1.7	1.8	3.4	3.7	8.4	9.1
75 m ²	2.5	2.7	5.1	5.4	13	13
100 m ²	3.2	3.4	6.5	6.9	16	17
500 m ²	15	16	31	32	77	79

Maintenance factor 0.8

Rh = Lh + 0.5 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -