

Order No.: 5MB252DL60840 | **GTIN (EAN):** 4052899488847


Product description: Arktika21-doff-lum,LED,8800lm840,DALI




Arktika® 21 duo, office luminaire, primary anti-glare with honeycomb louvre, of plastic, aluminium vaporised, highly specular, light emission: direct/indirect distribution, primary light characteristic: symmetric, installation type: suspended mounting, LED, rated luminous flux: 8.800lm, luminous efficacy: 132lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI, with terminal, 3+2-pole, max. 2.5mm², mains connection: 220..240V, AC, 50/60Hz, rated input power: 67W, housing, of aluminium, powder-coated, traffic white (RAL 9016), 2-length, length: 2.280mm, width: 120mm, height: 8mm, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, packaging unit: 1 piece

IP 20  

4052899488847
5MB252DL60840

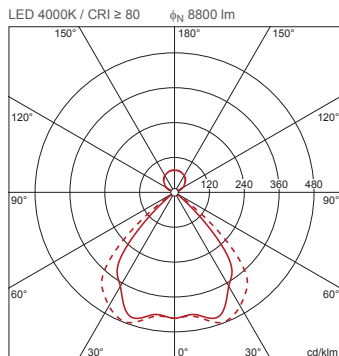

Lamps: LED
Wt. (kg): 3.3
GTIN (EAN): 4052899488847

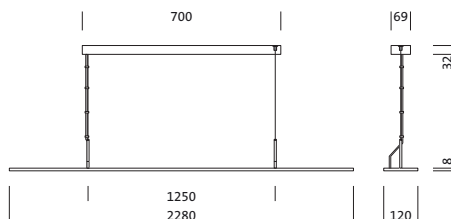

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MB252DL60840 | **GTIN (EAN):** 4052899488847

Detailed technical description: Arktika® 21 duo, LED, 8800lm, 840, DALI



Key data

- Product type: office luminaire
- Product name: Arktika® 21 duo
- Order No.: 5MB252DL60840

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Glare reduction: honeycomb louvre of plastic, aluminium vaporised, highly specular
- Beam angle: wide distribution, 95°
- Symmetry: symmetric
- Light emission: direct/indirect distribution, 75:25
- UGR viewing direction along longitudinal luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 8800lm
- Luminous efficacy: 132lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 67W

Operating device:

- Control gear: ECG DALI
- Control: DALI

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Certification, designation: CE

Material, Colour

- housing: aluminium, powder-coated, traffic white (RAL 9016), 2-length
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: suspended mounting, to the wire suspension, to the ceiling
- Recommended suspension height: 0.2..1.5m

Electrical connection

- Connection: terminal, 3+2-pole, max. 2.5mm²
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 2280mm
- Width: 120mm
- Height: 8mm
- Weight: 3.3kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5MB252DL60840 | **GTIN (EAN):** 4052899488847

Dimensions: Arkt21-doff-lum,LED,8800lm840,DALI

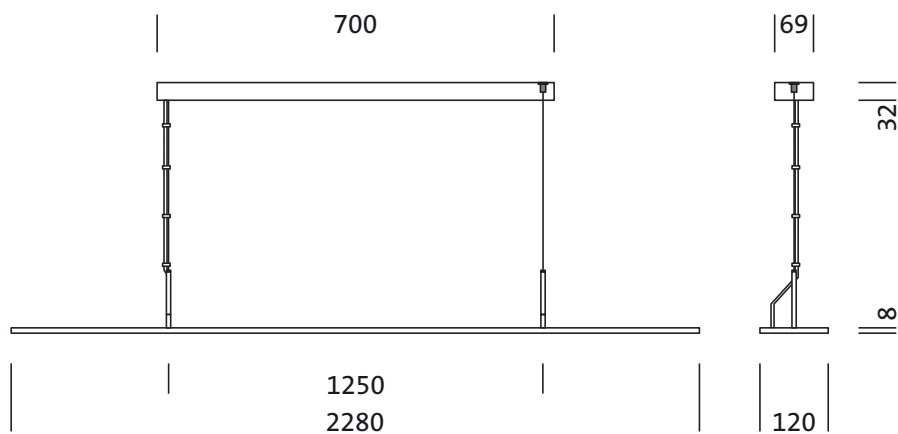

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722


Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MB252DL60840 | GTIN (EAN): 4052899488847

Planning data: Arkt21-doff-lum,LED,8800lm840,DALI

5MB252DL60840: 1x LED
4000K / CRI ≥ 80

4052899488847
5MB252DL60840

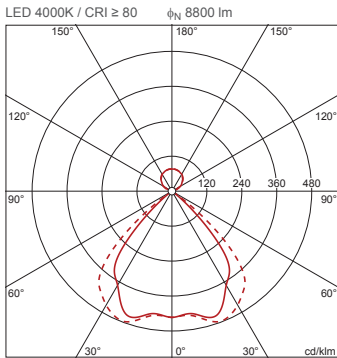

Φ_L 79% Φ_T 21%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	217	325
L ₇₀	292	296
L ₆₅	363	339

UGR 18.5 19

X 4H Y 8H ρ 70/50/20 S 0.25H

No. of luminaires in room

Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.3	0.3	0.6	0.7	1.5	1.7
30 m ²	0.5	0.5	1.0	1.1	2.5	2.7
40 m ²	0.6	0.7	1.3	1.4	3.1	3.5
50 m ²	0.8	0.8	1.5	1.7	3.8	4.2
75 m ²	1.2	1.2	2.3	2.4	5.8	6.1
100 m ²	1.5	1.6	2.9	3.1	7.4	7.8
500 m ²	7.0	7.2	14	14	35	36

Maintenance factor 0.8

Rh = Lh + 0.5 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -