

**Order No.:** 5MZ223D04WA | **GTIN (EAN):** 4058352124338

**Product description:** Scri11,LED7230lm840,DA,L2426,surf




Scriptus® 11, office luminaire, primary optical cover: lenses, CAT 2 ( $L \leq 3000 \text{cd/m}^2$ ), light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 7.230lm, luminous efficacy: 143lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 51W, housing, luminaire housing, of aluminium, traffic white (RAL 9016), length: 2.426mm, width: 114mm, height: 57mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: F, permissible operating ambient temperature: 0...+35°C, standard: EN 50419, packaging unit: 1 piece


4058352124338  
5MZ223D04WA

LED 4000K / CRI  $\geq 80$

$\Phi_{\text{N}}$  7230 lm



**Lamps:** LED  
**Wt. (kg):** 7.6  
**GTIN (EAN):** 4058352124338

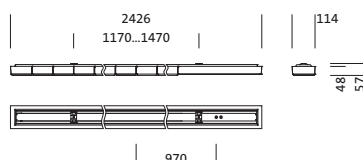

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5MZ223D04WA | **GTIN (EAN):** 4058352124338

**Detailed technical description:** Scri11,LED7230lm840,DA,L2426,surf



#### Key data

- Product type: office luminaire
- Product name: Scriptus® 11
- Order No.: 5MZ223D04WA

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Cover: lenses
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 19$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 7230lm
- Luminous efficacy: 143lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- Rated input power: 51W

#### Operating device:

- Control gear: ECG DALI
- Control: DALI

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Protection symbol: F
- Temperature range (operation): 0...+35°C
- Standard: EN 50419
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- housing: aluminium, traffic white (RAL 9016)
- luminaire housing: aluminium, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: lenses

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single arrangement

#### Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230...240V, 50Hz, AC

#### Dimensions, Weight


- Length: 2426mm
- Width: 114mm
- Height: 57mm
- Weight: 7.6kg

#### Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

**Order No.:** 5MZ223D04WA | **GTIN (EAN):** 4058352124338

**Dimensions:** Scri11,LED7230lm840,DA,L2426,surf

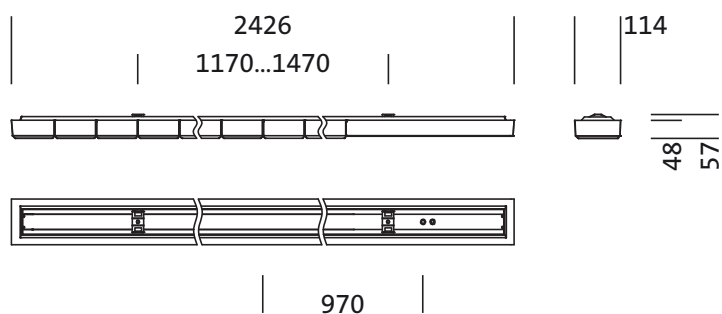

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)

Order No.: 5MZ223D04WA | GTIN (EAN): 4058352124338

Planning data: Scri11,LED7230lm840,DA,L2426,surf


5MZ223D04WA: 1x LED  
4000K / CRI ≥ 80

4058352124338

5MZ223D04WA

LED 4000K / CRI ≥ 80

Φ<sub>W</sub> 7230 lm



Φ<sub>d</sub> 100% Φ<sub>t</sub> 0%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	1962	2003
L <sub>70</sub>	2485	2523
L <sub>65</sub>	2706	2848

UGR 17.2 17.4

X 4H Y 8H ρ 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -