

Order No.: 59US1HXMPC5A | GTIN (EAN): 4058352363843

Product description: SConsens, PIR-sens, SI










SITECO ConnectSensor-Head PC5-M, master, local control - self-sufficient standalone sensors, switchable, dimmable, installation type: slip-in mounting, installation location: on interface, of plastic, protection rating (complete): IP54, certification: CE, VDE, 1 x PIR movement sensor, 1 x light sensor, 1 x IR receiver, packaging unit: 1 piece



Wt. (kg): 0.1

GTIN (EAN): 4058352363843





# Order No.: 59US1HXMPC5A | GTIN (EAN): 4058352363843

## Detailed technical description: SConsens, PIR-sens, SI



### Key data

System family: SITECO Connect

- Product type: sensor

Product name: SITECO ConnectOrder No.: 59US1HXMPC5A

## Certificates, Standards

- Protection rating: IP54

 Temperature range (operation): -20...+50°C

Certification, designation: CE, VDE

### Material, Colour

housing: plastic, whiteColour specification: white

#### Mounting

 Mounting method, mounting location: slip-in mounting, on interface

- Mounting height: 4..14m

## **Dimensions, Weight**

Length: 95mmWidth: 95mmHeight: 65mmWeight: 0.1kg

## Inputs

## 1x PIR movement sensor

- Connection: system connector
- Detection range: max. ø36m
- Option: 11 detection levels, 1416 switching zones
- Feature: detection range can be limited with shield, circular detection area


#### 1x IR receiver

 Feature: IR receiver for programming with Smart Remote



**Order No.:** 59US1HXMPC5A | **GTIN (EAN):** 4058352363843

Dimensions: SConsens, PIR-sens, SI

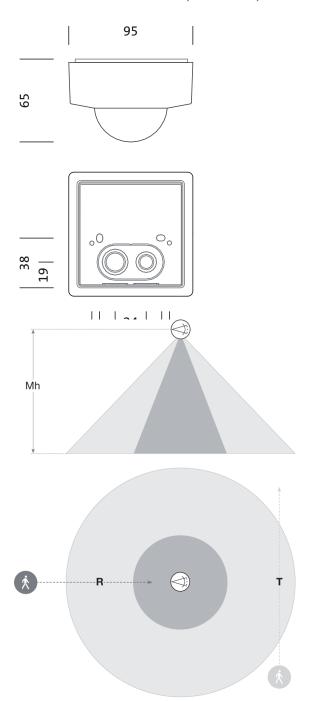

## Sensor Head PC5

Mh	R	Т
14m	ø = 16,3m	ø = 40m
12m	ø = 16,3m	ø = 40m
10m	ø = 15,6m	ø = 40m
8m	ø = 14,3m	ø = 40m
6m	ø = 12,0m	ø = 40m
4m	ø = 10,0m	ø = 40m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -