


Order No.: 59HC91001 | **GTIN (EAN):** 4058352463192

Product description: HB31S,refl,PC,dir,surf



Highbay 31 S, reflector, primary light control with reflector, of PC, transparent prismatic structure, light emission: direct with ceiling illumination distribution, primary light characteristic: rotationally symmetric, installation type: surface-mounted, diameter: 480mm, height: 227mm, packaging unit: 1 piece

Wt. (kg): 1.4
GTIN (EAN): 4058352463192



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59HC91001 | **GTIN (EAN):** 4058352463192

Detailed technical description: HB31S,refl,PC,dir,surf



Key data

- Product type: reflector
- Product name: Highbay 31 S
- Order No.: 59HC91001

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: reflector of PC, transparent prismatic structure
- Beam angle: narrow to wide distribution
- Symmetry: rotationally symmetric
- Light emission: direct with ceiling illumination
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Mounting


- Mounting method, mounting location: surface-mounted, to the luminaire
- Arrangement: single arrangement

Dimensions, Weight

- Diameter: 480mm
- Height: 227mm
- Weight: 1.4kg

Order No.: 59HC91001 | **GTIN (EAN):** 4058352463192

Dimensions: HB31S,refl,PC,dir,surf

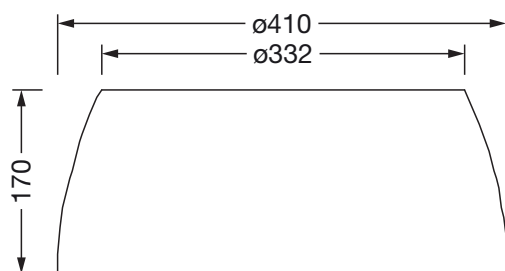

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -