

Order No.: 56TL1MDSPS2A | **GTIN (EAN):** 4058352400685

Product description: Licsens,PIR-sens,rec



Licross®sensor PS2, slave, central control - connection to lighting or building management, dimmable, installation type: recessed, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.7
GTIN (EAN): 4058352400685

Order No.: 56TL1MDSPS2A | **GTIN (EAN):** 4058352400685

Detailed technical description: Licens,PIR-sens,rec



Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: sensor
- Product name: Licross®
- Order No.: 56TL1MDSPS2A

Outputs

1x DALI

- Feature: DALI, slave function, DALI current max. 6mA

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0...+40°C
- Certification, designation: CE, UKCA

Material, Colour

- trunking rail adapter set: sheet steel, coil coated, white
- Colour specification: white
- housing: plastic, white
- Colour specification: white

Mounting

- Mounting method, mounting location: recessed, to the Licross® trunking rail
- Mounting height: 2.5..10m
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- Length: 500mm
- Width: 120mm
- Weight: 0.7kg

Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Detection range: radial min./max. 5x 5m/11x 11m, tangential min./max. 6x 6m/28x 28m
- Detection range: min./max. 4.8x 4.8m/8.2x 8.2m
- Feature: square detection area


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 06.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 56TL1MDSPS2A | GTIN (EAN): 4058352400685

Dimensions: Licens,PIR-sens,rec

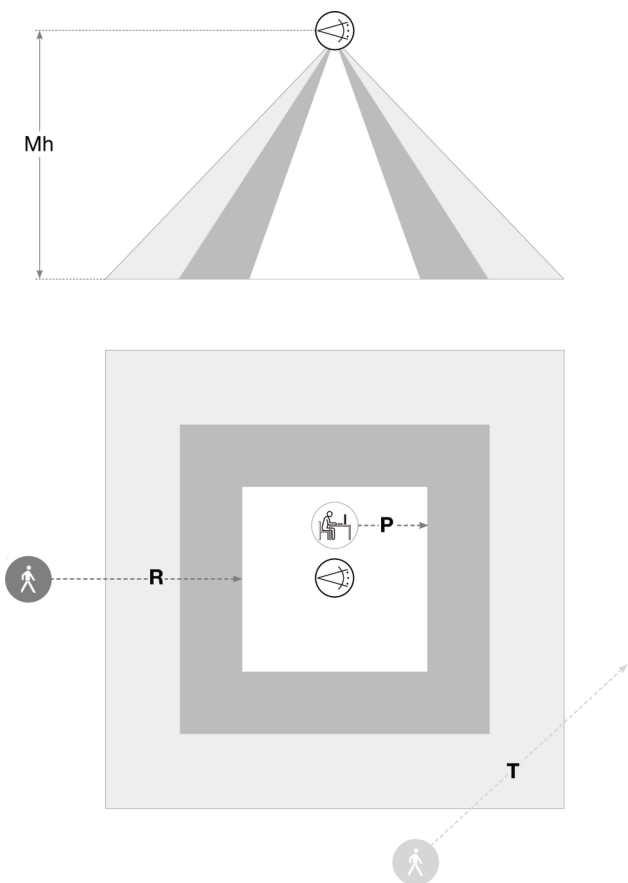

Sensor IR Quattro HD/ PS2

Mh	R	T	P
3m	4x4m - 8x8m	4x4m - 22x22m	4x4m - 8x8m
3,5m	5x5m - 11x11m	6x6m - 28x28m	7,2x7,2m - 8,2x8,2m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 06.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -