

Order No.: 56TL6MDSPC3A | GTIN (EAN): 4058352407653

Product description: LicTr,SensMoPC3S,wired



Licross® Trunkingsensor module PC3-S, slave, central control, dimmable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.3
GTIN (EAN): 4058352407653

Order No.: 56TL6MDSPC3A | GTIN (EAN): 4058352407653

Detailed technical description: LicTr,SensMoPC3S,wired



Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: presence detector (slave)
- Product name: Licross® Trunking
- Order No.: 56TL6MDSPC3A

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE, UKCA

Material, Colour

- trunking rail adapter set: sheet steel, coil coated, silver
- Colour specification: silver

Mounting

- Mounting height: 2.5..5m
- Supplement: only suitable for indoor use

Dimensions, Weight

- Length: 300mm
- Width: 66mm
- Height: 71mm
- Weight: 0.3kg



Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)

Order No.: 56TL6MDSPC3A | GTIN (EAN): 4058352407653

Dimensions: LicTr,SensMoPC3S,wired

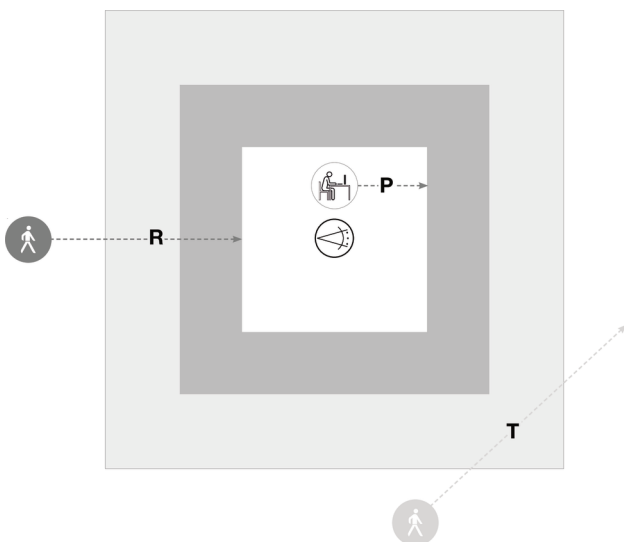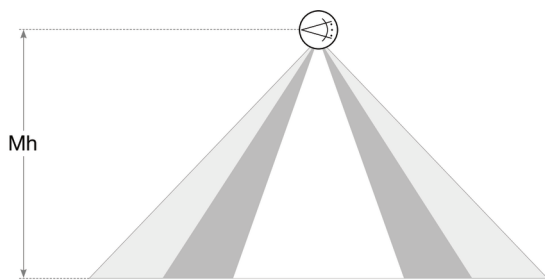

Sensor PS3

Mh	R	T	P
2,8m	4x4m	ca. 4x5m	ca. 2x2m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
 Tolerances related to thermal, electrical and photometric data according to IEC 62722
 Issued 05.01.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -