

**Order No.:** 56TL6MDSPC3A | **GTIN (EAN):** 4058352407653

**Product description:** Licens,PIR-sens



Licross®sensor module PC3-S, slave, central control - connection to lighting or building management, dimmable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.3  
GTIN (EAN): 4058352407653

**Order No.:** 56TL6MDSPC3A | **GTIN (EAN):** 4058352407653

**Detailed technical description:** Licsens,PIR-sens



#### Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: sensor
- Product name: Licross®
- Order No.: 56TL6MDSPC3A

#### Outputs

##### 1x DALI-2

- Feature: DALI, slave function, DALI current max. 6mA

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Lamps:

- Supplement: internal wiring halogen-free

##### Operating device:

- Control: DALI 2, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE, UKCA

#### Material, Colour

- sensor module: sheet steel, coil coated, silver
- Colour specification: silver

#### Mounting

- Mounting height: 2.5..5m
- Supplement: only suitable for use in indoor areas

#### Dimensions, Weight

- Length: 300mm
- Width: 66mm
- Height: 71mm
- Weight: 0.3kg

#### Inputs

##### 1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection range: tangential max. 4x5m
- Detection range: max. 2x 2m

##### 1x light sensor

- Illuminance: 2..1000lx



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 56TL6MDSPC3A | GTIN (EAN): 4058352407653

Dimensions: Licsens,PIR-sens

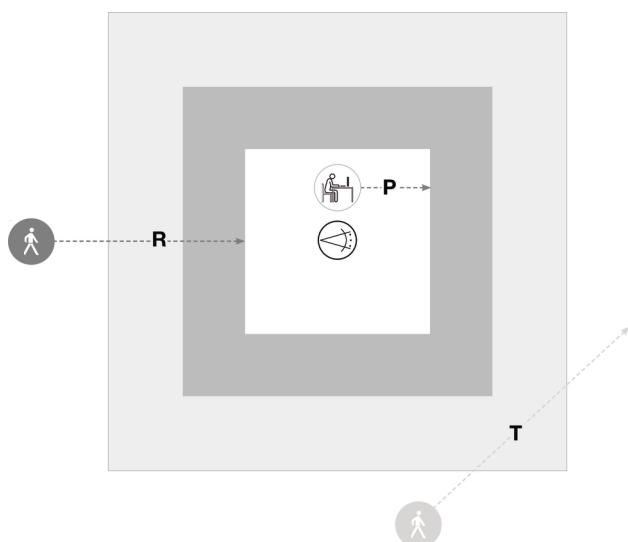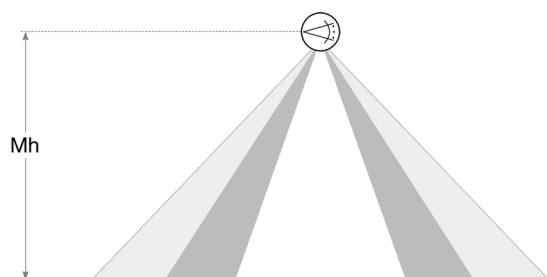

## Sensor PS3

Mh	R	T	P
2,8m	4x4m	ca. 4x5m	ca. 2x2m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -