

Order No.: 53BM813D2V4120 | **GTIN (EAN):** 4058352421901


Product description: Mod31HO,LI,e.nrrw,12260lm840,DA2,wh,5su



Modario® 31 HO, luminaire insert, of sheet steel, coil coated, white, length: 1.495mm, width: 81mm, height: 82mm, 5x system unit, system units: 299mm, LED rated luminous flux: 12.260lm, light colour: 840, control gear: DALI 2, control gear: ECG DALI, with plug, 5-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 80W, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -25...+30°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	2.0
GTIN (EAN):	4058352421901

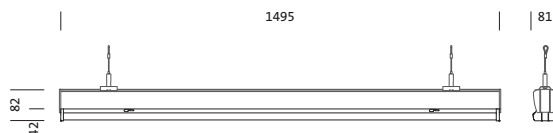

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 53BM813D2V4120 | **GTIN (EAN):** 4058352421901

Detailed technical description: Mod31HO,LI,e.nrrw,12260lm840,DA2,wh,5su



Key data

- Product type: luminaire insert
- Product name: Modario® 31 HO
- Order No.: 53BM813D2V4120

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: extremely narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 28
- UGR viewing direction along lateral luminaire axis: ≤ 28

Lamps:

- Lamps: with LED
- Rated luminous flux: 12260lm
- Luminous efficacy: 154lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 80W

Operating device:

- Control gear: ECG DALI
- Control: DALI 2

Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): -25...+30°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in Modario® trunking rail
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Arrangement: single/continuous arrangement

Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- System units: 5x SE
- Length: 1495mm
- Width: 81mm
- Height: 82mm
- Weight: 2.0kg

Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 53BM813D2V4120 | **GTIN (EAN):** 4058352421901

Dimensions: Mod31HO,LI,e.nrrw,12260lm840,DA2,wh,5su

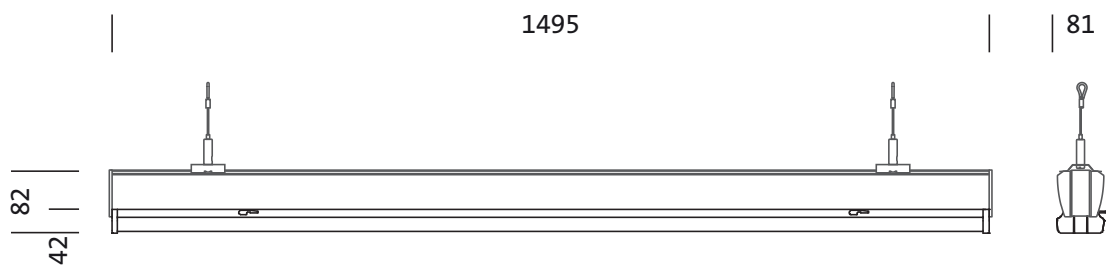

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com


Order No.: 53BM813D2V4120 | GTIN (EAN): 4058352421901

Planning data: Mod31HO,LI,e.nrrw,12260lm840,DA2,wh,5su

53BM813D2V4120: 1x LED

4058352421901
53BM813D2V4120

LED 4000 K | CRI ≥ 80 ϕ_N 12260 lm



ϕ_d 93% ϕ_t 7%

Luminance values (cd/m²)

	C 0°/180°	C 90°/270°
L ₈₀	10008	10647
L ₇₀	13895	19905
L ₆₅	13774	28182

UGR 25.2 26.1

X 4H Y 8H ρ 70/50/20 S 0.25H