

**Order No.:** 51SF117FB3B | **GTIN (EAN):** 4058352746196


**Product description:** Spot31Sl,26°,2200lm930,0/1,wh



Spot 31 Slim, directional spotlight, light control with reflector, of aluminium, anti glare with honeycomb louvre, LED rated luminous flux: 2.200lm, light colour: 930, control gear: ECG, with 3-phase adapter, mains connection: 220..240V, AC, 50/60Hz, housing, of aluminium, traffic white (RAL 9016), diameter: 70mm, adapter, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK02, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	0.8
GTIN (EAN):	4058352746196



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51SF117FB3B | **GTIN (EAN):** 4058352746196

**Detailed technical description:** Spot31 SL, 26°, 2200lm 930, 0/1, wh



#### Key data

- Product type: directional spotlight
- Product name: Spot 31 Slim
- Order No.: 51SF117FB3B

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: reflector of aluminium
- Glare reduction: honeycomb louvre
- Beam angle: 26°
- Symmetry: symmetric
- UGR viewing direction along longitudinal luminaire axis:  $\leq 25$
- UGR viewing direction along lateral luminaire axis:  $\leq 25$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 2200lm
- Luminous efficacy: 96lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 90
- Light colour: 930
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 23W

#### Operating device:

- Control gear: ECG
- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Certification, designation: CE

#### Material, Colour

- housing: aluminium, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- adapter: plastic

#### Electrical connection

- Connection: 3-phase adapter
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Diameter: 70mm
- Weight: 0.8kg

#### Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

**Order No.:** 51SF117FB3B | **GTIN (EAN):** 4058352746196

**Dimensions:** Spot31SI,26°,2200lm930,0/1,wh

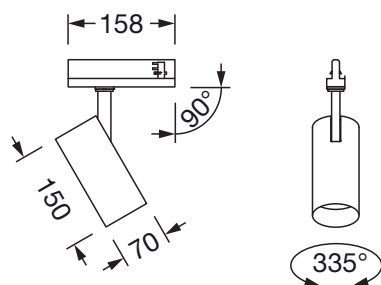

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -