

Order No.: 56TL1MBSHE1B | **GTIN (EAN):** 4058352542392

Product description: Licsens,HF-sens,rec



Licross®sensor HE1, slave, central control - connection to lighting or building management, local control - self-sufficient standalone sensors, dimmable, installation type: recessed, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, voltage: 230V, voltage type: AC, 1 x HF movement sensor, 1 x light sensor input, 1 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.5
GTIN (EAN): 4058352542392

Order No.: 56TL1MBSHE1B | **GTIN (EAN):** 4058352542392

Detailed technical description: Licsens,HF-sens,rec



Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: sensor
- Product name: Licross®
- Order No.: 56TL1MBSHE1B

1x light sensor input

- Illuminance: 20..800lx

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: internal wiring halogen-free

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE, UKCA

Material, Colour

- sensor module: sheet steel, coil coated, white
- Colour specification: white

Mounting

- Mounting method, mounting location: recessed, to the Licross® trunking rail
- Mounting height: 2.5..6m
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230V, 50Hz, AC



Dimensions, Weight

- Weight: 0.5kg

Inputs

1x HF movement sensor

- Connection: HF sensor
- Detection range: max. ø25m (radial)
- Option: range settable in steps
- Feature: ellipsoid detection area

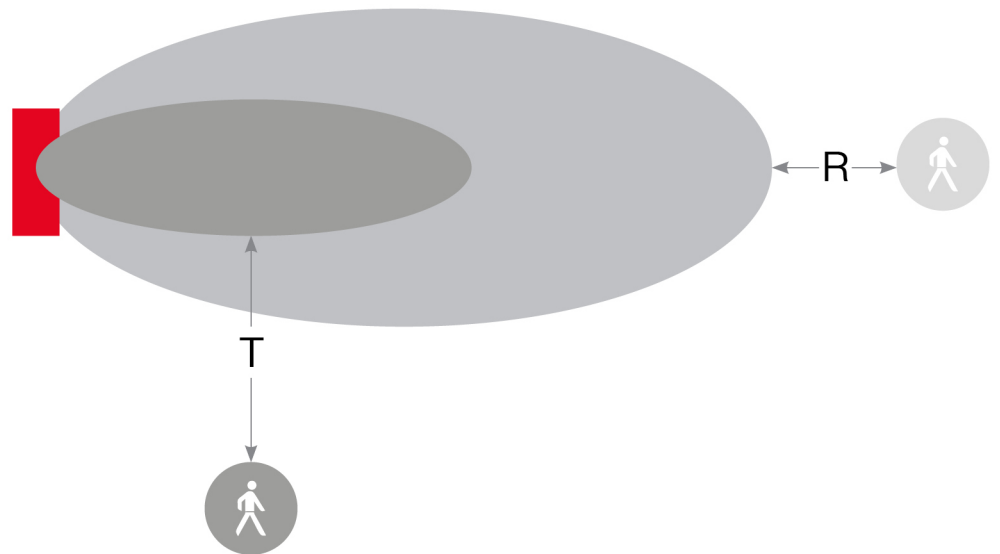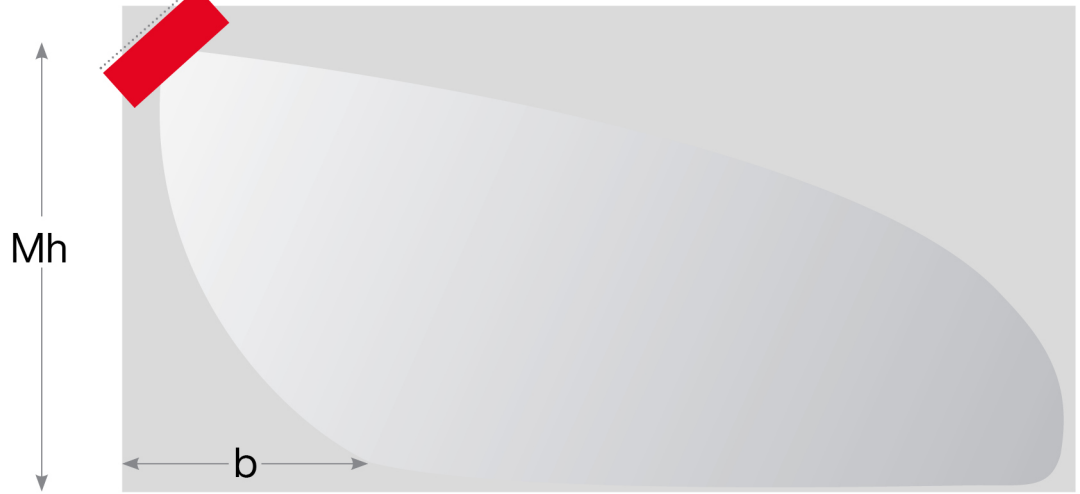

Siteco Sensor HE1

Mh	a	T	R	b
2,3m	85°	max 15m	max 25m	ca. 1,0m
2,3m	75°	max 10m	max 13m	ca. 0,5m
2,3m	55°	max 6m	max 8m	ca. 0m

Richtwert: Reichweite abhängig von örtlichen Gegebenheiten
Guide value: range depending on local conditions