

Order No.: 5LZ935100A | GTIN (EAN): 4058352838051


Product description: SCon31,controller,lokCtrl



SITECO Connect 31 Officecontroller, master, local control, dimmable, installation type: recessed, installation location: in the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, voltage: 220..240V, voltage type: AC, 1 x push button input, 1 x DALI, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.1  
GTIN (EAN): 4058352838051




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 13.04.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ935100A | GTIN (EAN): 4058352838051

Detailed technical description: SCon31,controller,lokCtrl



#### Key data

- System family: SITECO Connect 31 Office
- Product type: lighting management components
- Product name: SITECO Connect 31 Office
- Order No.: 5LZ935100A

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Operating device:

- Control: DALI, dimmable

##### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): -20..+60°C
- Certification, designation: CE

##### Material, Colour

- housing: plastic, pure white (RAL 9010)
- Colour specification: pure white (RAL 9010)

##### Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Supplement: only suitable for indoor use

##### Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC

##### Dimensions, Weight

- Length: 108mm
- Width: 30mm
- Height: 21mm
- Weight: 0.1kg

##### Inputs

##### 1x push button input

- Connection: screw terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Feature: zero-potential


##### Outputs

##### 1x DALI

- Connection: screw terminal, 2-pole, max. 1.5mm<sup>2</sup>
- System current: DALI current 96mA
- Feature: DALI, master function, broadcast addressing, max. 30 DALI ECGs, averaging with connected light sensors, connection of DALI2 certified sensors

Order No.: 5LZ935100A | GTIN (EAN): 4058352838051

Dimensions: SCon31,controller,lokCtrl

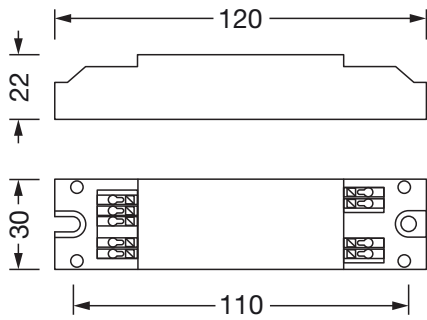

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 13.04.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -