

**Order No.:** 5LZ935100A | **GTIN (EAN):** 4058352838051


**Product description:** SCon31,controller,locCtrl



SITECO Connect 31 Officecontroller, master, local control - self-sufficient standalone sensors, dimmable, installation type: recessed, installation location: in the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, voltage: 220..240V, voltage type: AC, 2 x push button input, 2 x DALI, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.1  
GTIN (EAN): 4058352838051




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ935100A | **GTIN (EAN):** 4058352838051

**Detailed technical description:** SCon31,controller,locCtrl



## Key data

- System family: SITECO Connect 31 Office
- Product type: lighting management components
- Product name: SITECO Connect 31 Office
- Order No.: 5LZ935100A

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): - 20...+60°C
- Certification, designation: CE

#### Material, Colour

- housing: plastic, pure white (RAL 9010)
- Colour specification: pure white (RAL 9010)

#### Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight

- Length: 108mm
- Width: 30mm
- Height: 21mm
- Weight: 0.1kg

## Inputs

### 2x push button input

- Connection: screw terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Feature: zero-potential

## Outputs

### 2x DALI

- Connection: screw terminal, 2-pole, max. 1.5mm<sup>2</sup>
- System current: DALI current line 1 60mA, line 2 30mA
- Feature: two DALI lines, averaging with connected light sensors, connection of DALI2 certified sensors, DALI master function, broadcast addressing, max. 45 ECGs, DALI line 1, master function, broadcast addressing, max. 30 DALI ECGs, DALI line 2, master function, broadcast addressing, max. 15 DALI ECGs


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ935100A | **GTIN (EAN):** 4058352838051

**Dimensions:** SCon31,controller,locCtrl

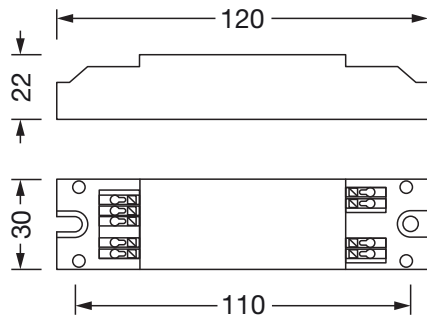

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)