

**Order No.:** 5EA40TE01 | **GTIN (EAN):** 4058352812075


**Product description:** SConWi,MotionEasy



SITECO Connect WirelessMotion Easy, sensor, communication: D4i type B, control: by daylight, by movement, sensor technology: 1 PIR movement sensor, daylight sensor, Smart Interface below, daylight sensor switch-on value 30 lux, switch-off value 30 lux, holding time after motion detection 2 minutes, luminous flux fixed at 20% in idle state and at 100% when motion is detected, installation type: screw fastening, installation location: to the luminaire, of PBT, voltage: 24V, voltage type: DC, PIR movement sensor, protection rating (complete): IP66, certification: CE, UL, packaging unit: 1 piece

IP 66 IK 07 

Wt. (kg): 0.1  
GTIN (EAN): 4058352812075



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)

**Order No.:** 5EA40TE01 | **GTIN (EAN):** 4058352812075

**Detailed technical description:** SConWi,MotionEasy



## Key data

- System family: SITECO Connect 31 Wireless
- Product type: sensor
- Product name: SITECO Connect Wireless
- Order No.: 5EA40TE01

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: D4i, Smart Interface below, luminous flux fixed at 20% in idle state and at 100% when motion is detected, holding time after motion detection 2 minutes, daylight sensor switch-on value 30 lux, switch-off value 30 lux

#### Certificates, Standards

- Protection rating: IP66
- Impact resistance: IK07
- Temperature range (operation): -40..+65°C
- Standard: according to Zhaga book 18
- Certification, designation: CE, UL

#### Material, Colour

- housing: PBT, grey
- Colour specification: grey

#### Mounting

- Mounting method, mounting location: screw fastening, to the luminaire
- Mounting height: 5..8m

#### Electrical connection

- Nominal voltage: 24V, DC

#### Dimensions, Weight

- Weight: 0.1kg


#### Inputs

#### PIR movement sensor

- Detection range: max. 30x6m
- Feature: incl. shield for reducing detection area


Order No.: 5EA40TE01 | GTIN (EAN): 4058352812075

Dimensions: SConWi, MotionEasy

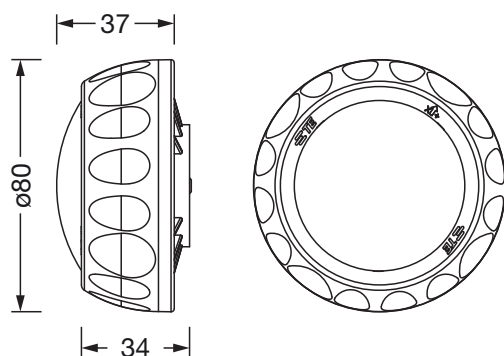


## Detection zone "Motion Easy" 5EA40TE01

Side view

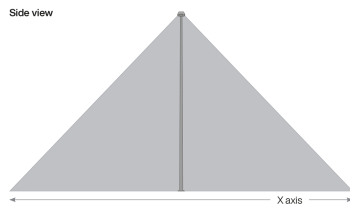

Top view

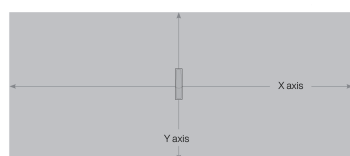

Mounting height  
5.0 m

X axis  
30.0 m

Y axis  
6.0 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -