Order No.: 5EA40RS01 | **GTIN (EAN):** 4058352916476

Product description: SConWi,MotionRadar

SITECO Connect WirelessMotion Radar, Smart Interface below, installation type: screw fastening, installation location: to the luminaire, of plastic, voltage: 24V, voltage type: DC, D4i, local setting and operation with USB stick, by movement, 2 radar movement sensors, radar movement sensor, radio, 2.4GHz, protection rating (complete): IP66, certification: CE, packaging unit: 1 piece

IP 66   IK 09   CE

Wt. (kg):	0.1
GTIN (EAN):	4058352916476

ø80

64

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 22.12.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

Order No.: 5EA40RS01 | **GTIN (EAN):** 4058352916476
Detailed technical description: SConWi,MotionRadar

Key data
— Product type: sensor
— Product name: SITECO Connect Wireless
— Order No.: 5EA40RS01

Lighting technology | Lamps | Control gear

Component 1

Operating device:
— Control: D4i, Smart Interface below

Certificates, Standards
— Protection rating: IP66
— Impact resistance: IK09
— Temperature range (operation): -20..+60°C
— Standard: according to Zhaga book 18
— Certification, designation: CE

Material, Colour
— housing: plastic, transparent, colour-backed, black
— Colour specification: black

Mounting
— Mounting method, mounting location: screw fastening, to the luminaire
— Mounting height: 4..8m

Electrical connection
— Nominal voltage: 24V, DC

Dimensions, Weight
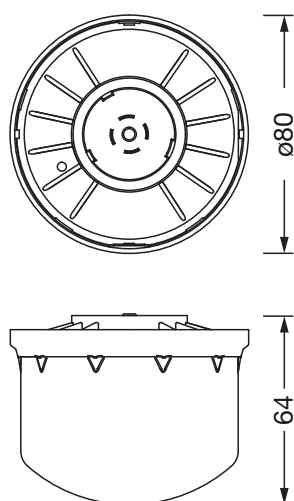— Diameter: 80mm
— Height: 63mm
— Weight: 0.1kg

Inputs

radar movement sensor
— Detection range: max. 70x20m

Mounting height 5m	X axis	Y axis
Vehicles	70.0 m	15.0 m
People	25.0 m	10.0 m

Dimensions: SConWi,MotionRadar

ø80

64