

Order No.: 51MX34DA37BB | **GTIN (EAN):** 4058352889084


Product description: Sil21,ELD-Lbk,7680lm830,DA2,L1204,bk,sp



Silica® 21, office luminaire, primary light control with darklight reflector, of PMMA, black, light emission: direct/indirect distribution, primary light characteristic: asymmetric, installation type: suspended mounting, LED, rated luminous flux: 7.680lm, luminous efficacy: 143lm/W, light colour: 830, colour temperature: 3000K, with terminal, 3+2-pole, max. 2.5mm², mains connection: 220..240V, AC, 50/60Hz, rated input power: 53.6W, luminaire housing, of aluminium, jet black (RAL 9005), length: 1.204mm, width: 53mm, height: 53mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	3.0
GTIN (EAN):	4058352889084

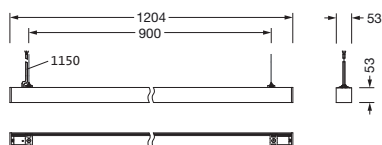

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 08.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 51MX34DA37BB | **GTIN (EAN):** 4058352889084

Detailed technical description: Sil21,ELD-Lbk,7680lm830,DA2,L1204,bk,sp



Key data

- Product type: office luminaire
- Product name: Silica® 21
- Order No.: 51MX34DA37BB

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: darklight reflector of PMMA, black
- Beam angle: wallwasher
- Symmetry: asymmetric distribution
- Light emission: direct/indirect distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 7680lm
- Luminous efficacy: 143lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 53.6W

Operating device:

- Control: DALI 2

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE

Material, Colour

- luminaire housing: aluminium, jet black (RAL 9005)
- Colour specification: jet black (RAL 9005)

Mounting

- Mounting method, mounting location: suspended mounting
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 3+2-pole, max. 2.5mm²
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 1204mm
- Width: 53mm
- Height: 53mm
- Weight: 3.0kg

Service life

- Rated service life: 70000h (L80/B50) at AT = 25°C, 50000h (L85/B50) at AT = 25°C

Order No.: 51MX34DA37BB | **GTIN (EAN):** 4058352889084

Dimensions: Sil21,ELD-Lbk,7680lm830,DA2,L1204,bk,sp

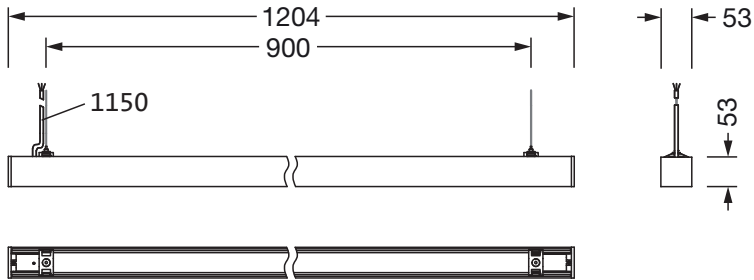

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 08.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com