


Order No.: 51MH11W72343 | **GTIN (EAN):** 4058352930854


Product description: Apol41,M625,3500lm830,0/1,IP40



Apollon® 41, office luminaire, primary optical cover: prismatic diffuser, of PS, light emission: direct distribution, primary light characteristic: symmetric, installation type: lay-in mounting, LED, rated luminous flux: 3.500lm, luminous efficacy: 123lm/W, light colour: 830, colour temperature: 3000K, control gear: ON/OFF, with terminal, 3-pole, mains connection: 220..240V, AC, 50/60Hz, housing, of aluminium section, traffic white (RAL 9016), module: M625, length: 620mm, width: 620mm, height: 60mm, recess depth: 180mm, housing upper side, of sheet steel, protection rating (complete): IP20, protection rating (lamp compartment, on room side): IP40, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, impact resistance: IK03, permissible operating ambient temperature: -25..+40°C, packaging unit: 1 piece

IP 20 IK 03  

Lamps:	LED
Wt. (kg):	1.9
GTIN (EAN):	4058352930854



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MH11W72343 | **GTIN (EAN):** 4058352930854

Detailed technical description: Apol41,M625,3500lm830,0/1,IP40



Key data

- Product type: office luminaire
- Product name: Apollon® 41
- Order No.: 51MH11W72343

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: prismatic diffuser
- Beam angle: wide distribution, 90°
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 3500lm
- Luminous efficacy: 123lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 28.5W
- Supplement: with through-wiring

Operating device:

- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment, on room side): IP40
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK03
- Temperature range (operation): -25...+40°C
- Certification, designation: CE, ENEC

Material, Colour

- housing: aluminium section, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- housing upper side: sheet steel
- Cover: prismatic diffuser of PS

Mounting

- Mounting method, mounting location: lay-in mounting, in the ceiling
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 3-pole
- Nominal voltage: 220...240V, 50/60Hz, AC

Dimensions, Weight


- Length: 620mm
- Width: 620mm
- Height: 60mm
- Recess depth: 180mm
- Weight: 1.9kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C, 60000h (L70/B50) at AT = 25°C

Order No.: 51MH11W72343 | **GTIN (EAN):** 4058352930854

Dimensions: Apol41,M625,3500lm830,0/1,IP40

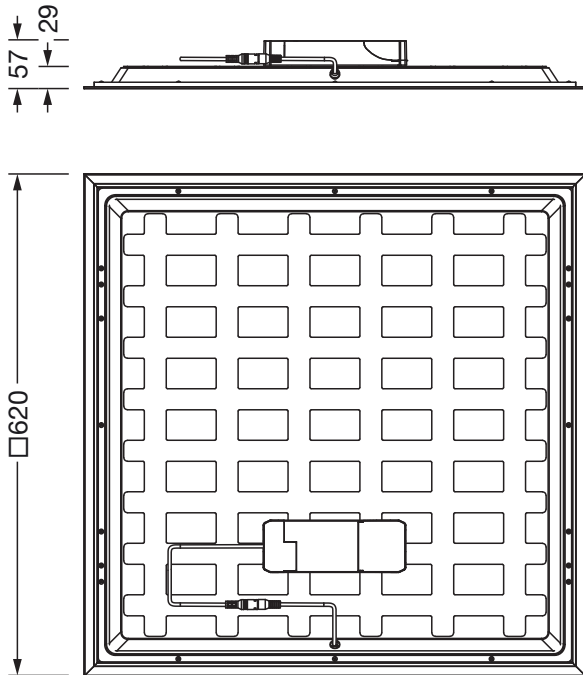

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com