

Order No.: 56TL1E7C4X31 | **GTIN (EAN):** 4058352862629


Product description: Lic,Ll,asy,ellips,nrrw,320lm740,CEAG,wh



Licross®, luminaire insert, of sheet steel, coil coated, white, length: 500mm, width: 59mm, height: 60mm, mounting height: 7..17m, emergency light element, LED rated luminous flux: 320lm, light colour: 740, control gear: CEAG, with plug, 6-pole, with phase selection, mains connection: 220..240V, AC/DC, 0/50..60Hz, rated input power: 3.9W, internal wiring halogen-free, for trunking rail, 9..14-core, for emergency light function, supply monitoring module CEAG, with address switch, choice between two emergency light lines via tool-free moving of contact pin prior to installation in trunking rail, primary light control with lens, of PMMA, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: asymmetric, for escape and rescue routes, compatible with all CEAG STAR technology systems (ZB-S, DG-S (DualGuard-S), LP-STAR, AT-S+), protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, protection symbol: D if used in an environment without relevant dust loads, impact resistance: IK06, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 40 IK 06  

Lamps: LED
Wt. (kg): 0.5
GTIN (EAN): 4058352862629



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 56TL1E7C4X31 | **GTIN (EAN):** 4058352862629

Detailed technical description: Lic,LI,asy,ellips,nrrw,320lm740,CEAG,wh



Key data

- System family: compatible with all CEAG STAR technology systems (ZB-S, DG-S (DualGuard-S), LP-STAR, AT-S+)
- Product type: luminaire insert
- Product name: Licross®
- Order No.: 56TL1E7C4X31

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: ellipsoid, narrow distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 320lm
- Luminous efficacy: 82lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 70
- Light colour: 740
- Rated input power: 3.9W
- Supplement: for emergency light function, internal wiring halogen-free, for trunking rail, 9..14-core, supply monitoring module CEAG, with address switch

Operating device:

- Control: CEAG

Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment without relevant dust loads
- Temperature range (operation): -20..+40°C
- Certification, designation: CE, UKCA

Material, Colour

- luminaire module: sheet steel, coil coated, white
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Mounting height: 7..17m
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 6-pole, with phase selection
- Nominal voltage: 220..240V, 0/50..60Hz, AC/DC

Dimensions, Weight


- Length: 500mm
- Width: 59mm
- Height: 60mm
- Weight: 0.5kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 56TL1E7C4X31 | **GTIN (EAN):** 4058352862629

Dimensions: Lic,LI,asy,ellips,nrrw,320lm740,CEAG,wh

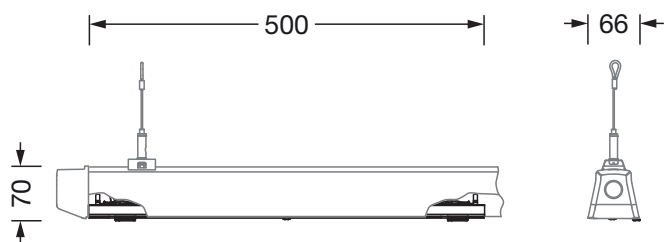

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -