


Order No.: 51LN12MNM70A3G | **GTIN (EAN):** 4058352011645


Product description: Silue21,7000lm8mc,ML,L1500,EL3h



Silhouette® 21, office luminaire, primary optical cover: enclosure, of PC, frosted, light emission: direct distribution, primary light characteristic: symmetric, installation type: suspended mounting, surface-mounted, LED, rated luminous flux: 7.000lm, luminous efficacy: 140lm/W, light colour: 830/840/850, colour temperature: 3000/4000/5000K, with terminal, 4-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 50W, control gear: single battery element, housing, of sheet steel, white, length: 1.500mm, width: 152mm, height: 53mm, end cap, of PMMA, white, protection rating (complete): IP44, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, protection symbol: D, permissible operating ambient temperature: -20..+40°C, standard: EN 60598-2-22, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	3.9
GTIN (EAN):	4058352011645

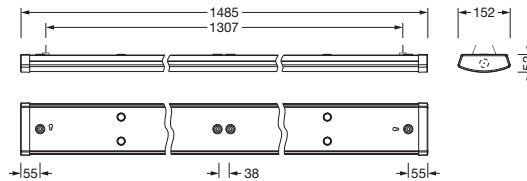

Order No.: 51LN12MNM70A3G | **GTIN (EAN):** 4058352011645

Detailed technical description: Silue21,7000lm8mc,ML,L1500,EL3h



Key data

- Product type: office luminaire
- Product name: Siluette® 21
- Order No.: 51LN12MNM70A3G

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: enclosure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 7000lm
- Luminous efficacy: 140lm/W
- Colour temperature: 3000/4000/5000K
- Colour rendering index: CRI > 80
- Light colour: 830/840/850
- Rated input power: 50W
- Supplement: suitable for emergency light operating devices according to IEC 60598-2-22, luminous flux adjustable on luminaire in four steps (3800/4800/5900/7000lm), connected load according to luminous flux setting (27/34/42/50W)

Operating device:

- Control gear: single battery element
- Nominal service life: 3h

Component 2

Certificates, Standards

- Protection rating: IP44
- Insulation class: insulation class I (protective earthing)
- Protection symbol: D
- Temperature range (operation): -20..+40°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Standard: EN 60598-2-22
- Certification, designation: CE, UKCA

Material, Colour

- housing: sheet steel, white
- Colour specification: white
- end cap: PMMA, white
- Quantity: 2 piece
- Colour specification: white
- Cover: enclosure of PC

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to wire, to the ceiling, to the wall
- Arrangement: single arrangement
- Supplement: only suitable for indoor use

Electrical connection

- Connection: terminal, 4-pole
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 1500mm
- Width: 152mm
- Height: 53mm
- Weight: 3.9kg

Service life

- Rated service life: 100000h (L80/B50) at AT = 25°C

Order No.: 51LN12MNM70A3G | GTIN (EAN): 4058352011645

Dimensions: Silue21,7000lm8mc,ML,L1500,EL3h

