

**Order No.:** 5XE7U27N08MB | **GTIN (EAN):** 4058352995594


**Product description:** SL21md,P0.8a,15120lm722,NEMA7



Streetlight SL 21 midi, mast luminaire, primary light control with lens, of PMMA, primary optical cover: cover, of toughened safety glass, transparent, light distribution: P0.8a, light emission: direct distribution, primary light characteristic: asymmetric, installation type: side-entry, LED, 3G 2.5mm<sup>2</sup>, High Power LED, rated luminous flux: 15.120lm, luminous efficacy: 113lm/W, light colour: 722, colour temperature: 2200K, control gear: NEMA (7pin), control: flexible luminous flux parameterisation, time-dependent luminous flux control, constant luminous flux control, pre-setting: linear dimming characteristic, overheat protection, mains connection: 220..240V, AC, 50/60Hz, connection cable pre-assembled, cable length: 12,5m, wiring characteristics: H05VV-F, start of lifetime: 134W, end of service life: 141W, reduction: 60W, luminaire housing, of diecast aluminium (EN AC-44300), powder-coated, SITECO metallic grey (DB 702S), corrosivity category C5 high according to DIN EN ISO 12944, multi-level sealing system, sealing non-destructively replaceable, inclination adjustable: 0°, 5°, 10°, 15°, length: 644mm, width: 335mm, height: 110mm, spigot size: 42mm (side-entry), mounting height: 4..8m, protection rating (complete): IP66, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, ENEC+, VDE, impact resistance: IK10, permissible operating ambient temperature for outdoor applications: -40..+50°C, standard-compliant lighting for roads and squares, packaging unit: 1 piece



**Lamps:** LED  
**Wt. (kg):** 9.7  
**GTIN (EAN):** 4058352995594

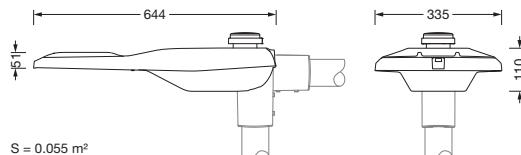

$S = 0.055 \text{ m}^2$

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.: 5XE7U27N08MB | GTIN (EAN): 4058352995594****Detailed technical description: SL21md,P0.8a,15120lm722,NEMA7****Key data**

- Product type: mast luminaire
- Product name: Streetlight SL 21 midi
- Order No.: 5XE7U27N08MB

**Lighting technology | Lamps | Control gear****Component 1****Lighting technology:**

- Light control: lens of PMMA
- Cover: cover, transparent
- Light distribution: P0.8a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

**Lamps:**

- Lamps: with High Power LED, LED
- Rated luminous flux: 15120lm
- Luminous efficacy: 113lm/W
- Colour temperature: 2200K
- Colour rendering index: CRI > 70
- Light colour: 722
- Rated input power begin service life: 134
- Rated input power end service life: 141
- Rated input power at 50% lumin. flux: 60

**Operating device:**

- Control: NEMA (7pin)
- Equipment: overheat protection, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation, pre-setting: linear dimming characteristic

**Certificates, Standards**

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK10
- Temperature range (operation): -40..+50°C
- Supplement: standard-compliant lighting for roads and squares
- Corrosion protection: corrosivity category C5 high according to DIN EN ISO 12944
- Certification, designation: CE, ENEC, ENEC+, VDE

**Material, Colour**

- luminaire housing: diecast aluminium (EN AC-44300), powder-coated, SITECO metallic grey (DB 702S), inclination adjustable: 0°, 5°, 10°, 15°, sealing non-destructively replaceable, multi-level sealing system
- Colour specification: SITECO metallic grey (DB 702S)
- Cover: cover of toughened safety glass

**Mounting**

- Mounting method, mounting location: side-entry, on mast
- Supplement: with pre-assembled mast flange

**Electrical connection**

- Nominal voltage: 220..240V, 50/60Hz, AC
- Surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode)
- Connection cable: pre-assembled, L= 12.5m

**Dimensions, Weight**

- Length: 644mm
- Width: 335mm
- Height: 110mm
- Weight: 9.7kg
- Mast spigot: spigot size: 42mm (side-entry)

**Light emission**

- Light emission: 0% at 0° inclination


**Service life**

- Rated service life: 100000h (L97/B10) at AT = 25°C

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XE7U27N08MB | **GTIN (EAN):** 4058352995594

**Dimensions:** SL21md,P0.8a,15120lm722,NEMA7

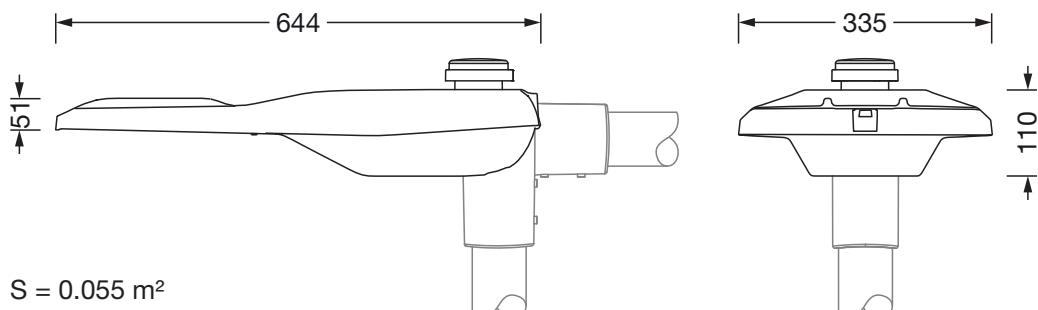

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -