

Order No.: 51SL337A33B | **GTIN (EAN):** 4058352864951


Product description: LicSp31,28°,3570lm930,0/1,bk



Licross® Spot 31, directional spotlight, light control with lens, of plastic, LED rated luminous flux: 3.570lm, light colour: 930, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, of aluminium, jet black (RAL 9005), length: 300mm, diameter: 90mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	1.2
GTIN (EAN):	4058352864951



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51SL337A33B | **GTIN (EAN):** 4058352864951

Detailed technical description: LicSp31,28°,3570lm930,0/1,bk



Key data

- Product type: directional spotlight
- Product name: Licross® Spot 31
- Order No.: 51SL337A33B

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of plastic
- Beam angle: 28°
- Symmetry: symmetric

Lamps:

- Lamps: with LED
- Rated luminous flux: 3570lm
- Luminous efficacy: 135lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 90
- Light colour: 930
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 27.9W

Operating device:

- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE

Material, Colour

- Colour specification: jet black (RAL 9005)

Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 300mm
- Diameter: 90mm
- Height: 133mm
- Weight: 1.2kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 51SL337A33B | **GTIN (EAN):** 4058352864951

Dimensions: LicSp31,28°,3570lm930,0/1,bk

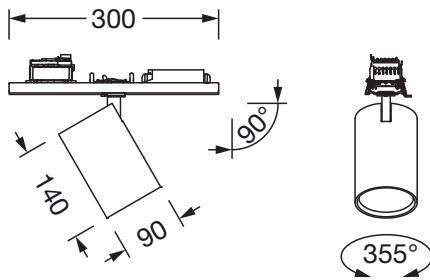

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com