

**Order No.:** 51SL637A35B | **GTIN (EAN):** 4058352865453


**Product description:** LicSp31,28°,5030lm930,0/1,sr



Licross® Spot 31, directional spotlight, light control with lens, of plastic, LED rated luminous flux: 5.030lm, light colour: 930, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, of aluminium, metallic grey (RAL 9006), length: 300mm, diameter: 90mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, packaging unit: 1 piece

IP 20  

|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 1.2           |
| GTIN (EAN): | 4058352865453 |



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51SL637A35B | **GTIN (EAN):** 4058352865453

**Detailed technical description:** LicSp31,28°,5030lm930,0/1,sr



#### Key data

- Product type: directional spotlight
- Product name: Licross® Spot 31
- Order No.: 51SL637A35B

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: lens of plastic
- Beam angle: 28°
- Symmetry: symmetric

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 5030lm
- Luminous efficacy: 135lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 90
- Light colour: 930
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 42.5W

#### Operating device:

- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE

#### Material, Colour

- Colour specification: metallic grey (RAL 9006)

#### Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 300mm
- Diameter: 90mm
- Height: 133mm
- Weight: 1.2kg

#### Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

**Order No.:** 51SL637A35B | **GTIN (EAN):** 4058352865453

**Dimensions:** LicSp31,28°,5030lm930,0/1,sr

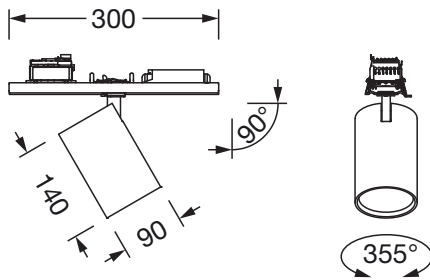

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -