

**Order No.:** 51DT13MA42B | **GTIN (EAN):** 4069025152169


**Product description:** Lun41Sp,Ø68,600lm840,MLwh



Lunis 41, Spot, downlight, light emission: direct distribution, LED rated luminous flux: 600lm, light colour: 840, mains connection: 230V, AC, 50/60Hz, housing, round, of aluminium, coated, traffic white (RAL 9016), diameter: 88mm, recess depth: 54mm, protection rating (complete): IP20, protection rating (on room side): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	0.2
GTIN (EAN):	4069025152169



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51DT13MA42B | **GTIN (EAN):** 4069025152169

**Detailed technical description:** Lun41Sp,Ø68,600lm840,MLwh



#### Key data

- Product type: downlight
- Product name: Lunis 41 Spot
- Order No.: 51DT13MA42B

#### Service life

- Rated service life: 30000h (L70/B50) at AT = 25°C

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 600lm
- Luminous efficacy: 130lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- Rated input power: 4.6W

#### Operating device:

- Control: ON/OFF Multilumen

#### Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): - 20...+40°C
- Certification, designation: CE

#### Material, Colour

- housing: aluminium, coated, traffic white (RAL 9016), round
- Colour specification: traffic white (RAL 9016)

#### Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 68mm
- Arrangement: single arrangement

#### Electrical connection


- Nominal voltage: 230V, 50/60Hz, AC

#### Dimensions, Weight

- Diameter: 88mm
- Recess depth: 54mm
- Weight: 0.2kg

**Order No.:** 51DT13MA42B | **GTIN (EAN):** 4069025152169

**Dimensions:** Lun41Sp, Ø68, 600lm840, MLwh

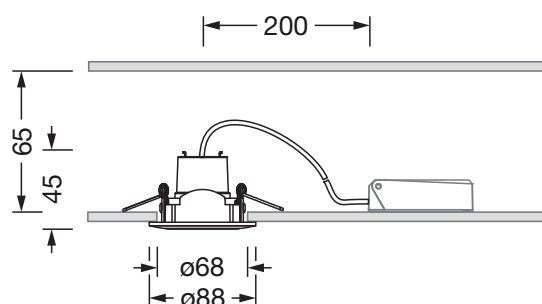

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -