


**Order No.:** 5LZ950101A | **GTIN (EAN):** 4069025242884

**Product description:** SCon11HWi,controller,wirel

SITECO Connect 11H Wirelesscontroller, master, local control - self-sufficient standalone sensors, dimmable, installation type: recessed, surface-mounted, installation location: to the ceiling, in the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, voltage: 100..240V, voltage type: AC, 2 x DALI, 1 x Bluetooth® interface, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2  
GTIN (EAN): 4069025242884

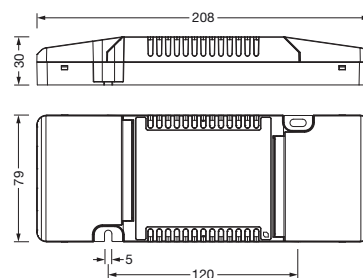

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ950101A | **GTIN (EAN):** 4069025242884

**Detailed technical description:** SCon11HWi,controller,wirel

#### Key data

- System family: SITECO Connect 11H Wireless
- Product type: control unit
- Product name: SITECO Connect 11H Wireless
- Order No.: 5LZ950101A

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Operating device:

- Control: Bluetooth® Mesh, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): - 20..+50°C
- Certification, designation: CE, UKCA

#### Material, Colour

- housing: plastic, white
- Colour specification: white

#### Mounting

- Mounting method, mounting location: surface-mounted, recessed, to the ceiling, in the ceiling
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Nominal voltage: 100..240V, 50/60Hz, AC

#### Dimensions, Weight

- Length: 208mm
- Width: 79mm
- Height: 30mm
- Weight: 0.2kg

#### Outputs

##### 2x DALI

- System current: max. 100mA
- Feature: master function

##### 1x Bluetooth® interface

- Feature: wireless networking


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ950101A | **GTIN (EAN):** 4069025242884

**Dimensions:** SCon11HWi,controller,wirel

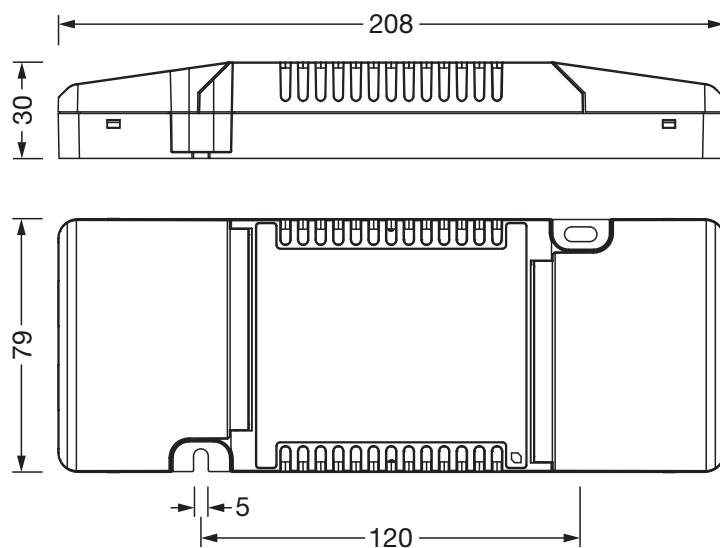

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -