

**Order No.:** 5LZ950701A | **GTIN (EAN):** 4069025243065


**Product description:** SCon11HWiGatew,DALI,rec,surf



SITECO Connect 11H Wireless, Gateway, installation type: recessed, surface-mounted, control gear: Bluetooth® Mesh, mains connection: 100..240V, AC, 50/60Hz, housing, of plastic, white, length: 208mm, width: 79mm, height: 30mm, Gateway DALI wireless, local control - self-sufficient standalone sensors, equipment: master, dimmable, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, permissible operating ambient temperature: 0..+40°C, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2  
GTIN (EAN): 4069025243065

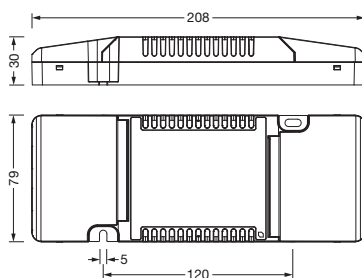

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ950701A | **GTIN (EAN):** 4069025243065

**Detailed technical description:** SCon11HWiGatew,DALI,rec,surf



#### Key data

- System family: SITECO Connect 11H Wireless
- Product type: Gateway
- Product name: SITECO Connect 11H Wireless
- Order No.: 5LZ950701A

#### 1x Bluetooth® interface

- Feature: wireless networking

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Operating device:

- Control: Bluetooth® Mesh, dimmable

##### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0...+40°C
- Certification, designation: CE, UKCA

##### Material, Colour

- housing: plastic, white
- Colour specification: white

##### Mounting

- Mounting method, mounting location: surface-mounted, recessed, to the ceiling, in the ceiling
- Supplement: only suitable for use in indoor areas

##### Electrical connection

- Nominal voltage: 100...240V, 50/60Hz, AC

##### Dimensions, Weight

- Length: 208mm
- Width: 79mm
- Height: 30mm
- Weight: 0.2kg

##### Inputs

##### 1x DALI

- Feature: for connection to a DALI application controller

##### Outputs


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ950701A | **GTIN (EAN):** 4069025243065

**Dimensions:** SCon11HWiGatew,DALI,rec,surf

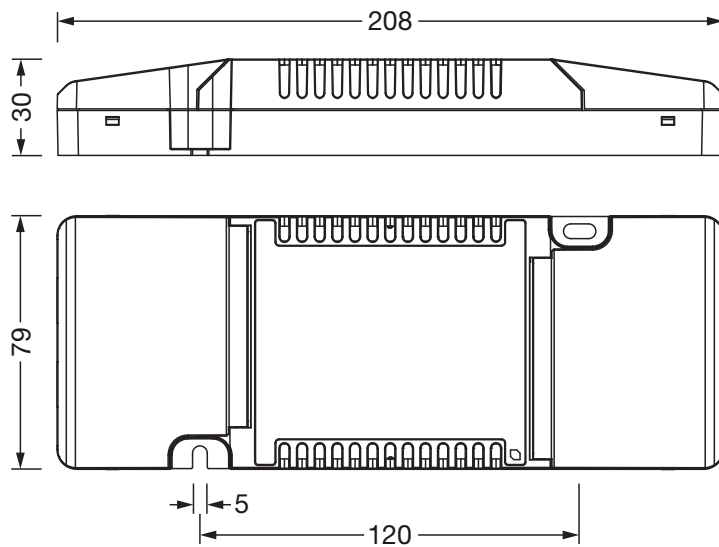

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -