

Order No.: 5LZ950200A | **GTIN (EAN):** 4069025242907


Product description: SCon11HWisens,PIR-sens,rec



SITECO Connect 11H WirelessNode Multisensor PC9, master, local control - self-sufficient standalone sensors, dimmable, installation type: recessed, installation location: in the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, UKCA, voltage: 220..240V, voltage type: AC, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI, 1 x Bluetooth® interface, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2
GTIN (EAN): 4069025242907



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ950200A | **GTIN (EAN):** 4069025242907

Detailed technical description: SCon11HWisens,PIR-sens,rec



Key data

- System family: SITECO Connect 11H Wireless
- Product type: sensor
- Product name: SITECO Connect 11H Wireless
- Order No.: 5LZ950200A

1x DALI

- System current: max. 60mA
- Feature: master function

1x Bluetooth® interface

- Feature: wireless networking

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: Bluetooth® Mesh, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0...+50°C
- Certification, designation: CE, UKCA

Material, Colour

- housing: plastic, white
- Colour specification: white

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Mounting height: 2.5...5m
- Supplement: only suitable for use in indoor areas

Electrical connection

- Nominal voltage: 220...240V, 50/60Hz, AC

Dimensions, Weight

- Diameter: 105mm
- Height: 45mm
- Weight: 0.2kg

Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Feature: circular detection area

Outputs




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ950200A | GTIN (EAN): 4069025242907

Dimensions: SCon11HWisens,PIR-sens,rec

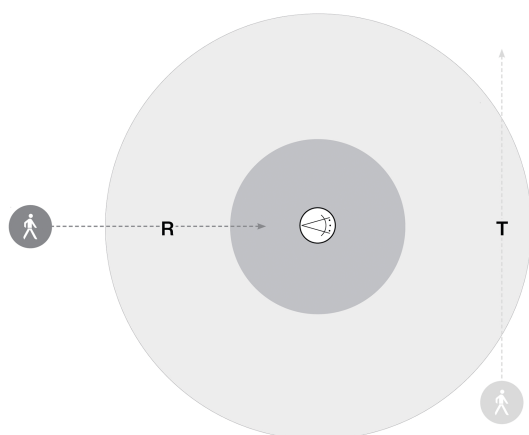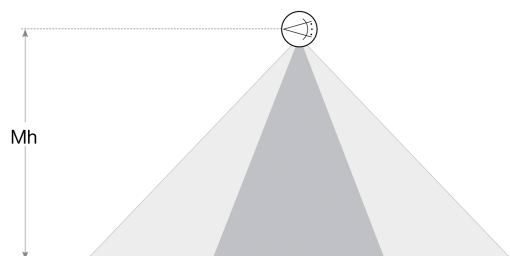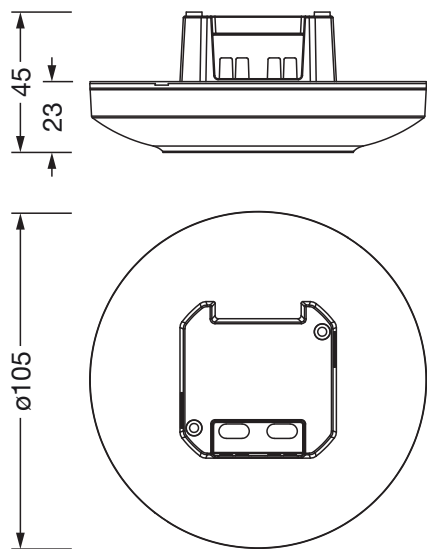

Sensor PC 9

Mh	R	T
2,5m	ø = 4m	ø = 8m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -